


PROJECT:

PREPARED BY:

TYPE:



# SEAMLESS LINKABLE LED LUMINARY RIB AC

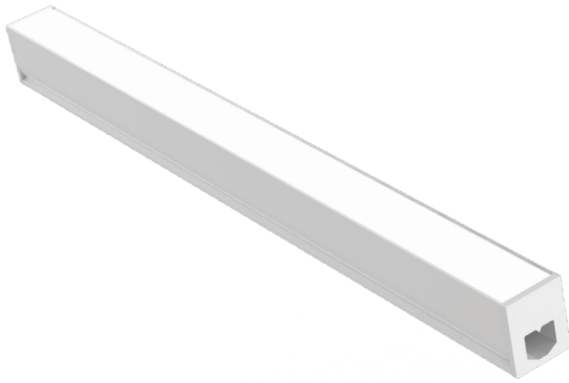

## SPECIFICATIONS

Lumen	70LM/W	Environment	IP20
Wattage	3W/FT	Warranty	5 Year
Input Voltage	120V	Dimming	Triac
Color Temperature	2700K, 3000K, 3500K, 4000K, 5000K	Chip	SMD 2835
Beam Angle	120°	Certification	UL, CE
Application	Surface Mount, Recessed	Max Run	39.4FT
Operating Temperature	-20° - 45C°	CRI	90



## ORDERING GUIDE

**RIBAC - \_\_\_\_\_ - \_\_\_\_\_ - 120V - \_\_\_\_\_**      *Example: RIBAC-4-27K-120-BK*

MODEL	Length	Wattage	Lumens	Color Temperature	Voltage	Finish
RIBAC	<b>4</b> 4IN	1W	70LM	<b>27</b> 2700K	120V	<b>WT</b> White
	<b>6</b> 6IN	1.5W	110LM	<b>30</b> 3000K		<b>BK</b> Black
	<b>8</b> 6IN	2W	140LM	<b>35</b> 3500K		<b>BN</b> Brushed Nickel
	<b>12</b> 12IN	3W	210LM	<b>40</b> 4000K		<b>GD</b> Gold
	<b>24</b> 24IN	6W	420LM	<b>50</b> 5000K		
	<b>48</b> 48IN	12W	840LM			



# SEAMLESS LINKABLE LED LUMINARY RIB AC

## ACCESSORIES



End Cap



Extender Connector



Starter Bottom Feed



Power Plug



Coupling Wire



Starting Wire



Junction box

## ORDERING GUIDE








**RIBAC - \_\_\_\_\_** *Example: RIBAC-EC*

MODEL	TYPE	DESCRIPTION
RIBAC	EC	Extender Connector
	PP	Power Plug 40 Inch Straight feed
	C	12 Inch Coupling
	40-S	40inch Starter Straight feed
	MC	Mounting Clip
	MNT	Magnet Set
	JB	Junction box with 40inch Starter
	C2	2 Inch Coupling
	PPBF	Power Plug Bottom Feed
	40-SBF	40 Inch Starter Bottom Feed



# SEAMLESS LINKABLE LED LUMINARY RIB AC

## DIAGRAM

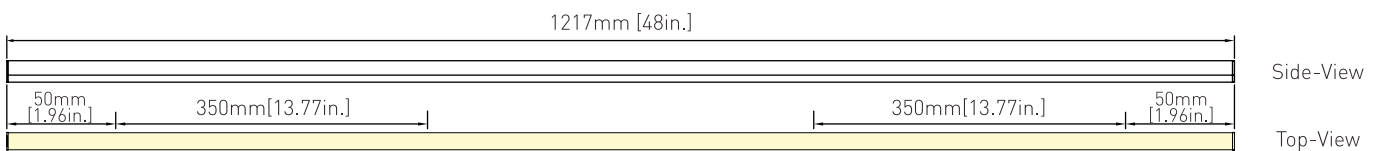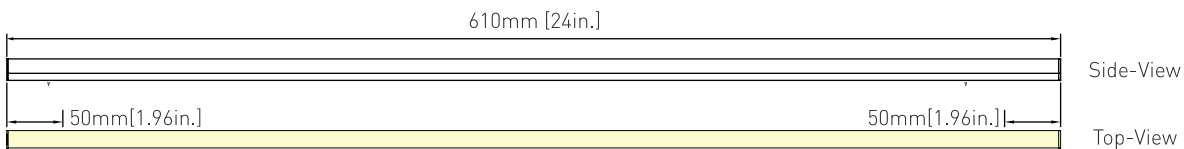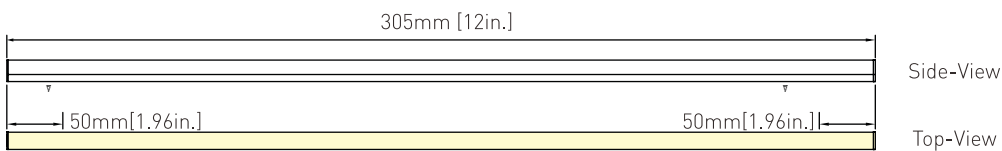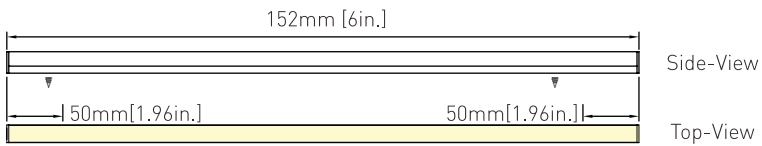




# SEAMLESS LINKABLE LED LUMINARY RIB AC


## INSTALLATION

### Option 1: Fixed by magnet.

Magnet on backside is embedded inside the PC housing.

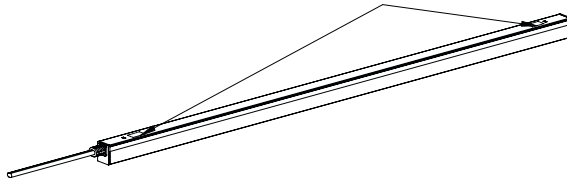


Directly stick to the metal mounting surface.

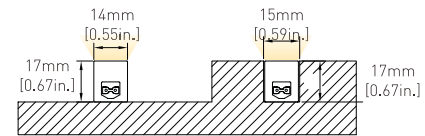


Surface Mounting

Flush Mounting  
Groove size:  
W15\*H17mm  
[W0.59\*H0.67in.]

### Option 2: Fixed by magnet and metal sheet.

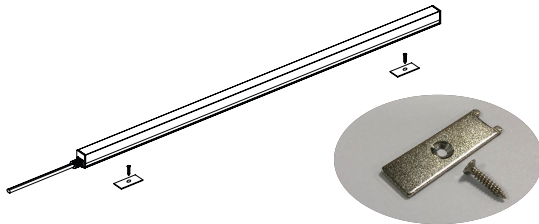


Fix the metal sheet by screw according to the position of the magnet firstly, and then stick the product to the metal sheet.

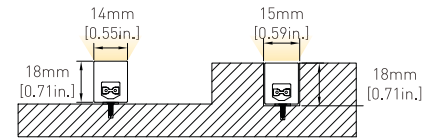


Surface Mounting

Flush Mounting  
Groove size:  
W15\*H18mm  
[W0.59\*H0.71in.]

### Option 3: Fixed by adhesive tape.

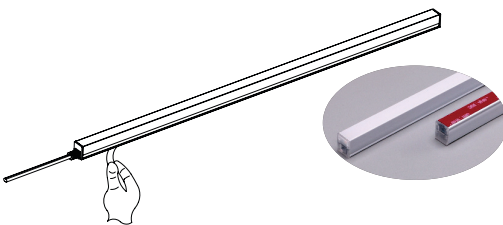


Peel off the adhesive tape on backside, and then stick to the mounting surface.

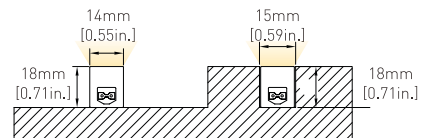


Surface Mounting

Flush Mounting  
Groove size:  
W15\*H18mm  
[W0.59\*H0.71in.]

### Option 4: Fixed by bracket.

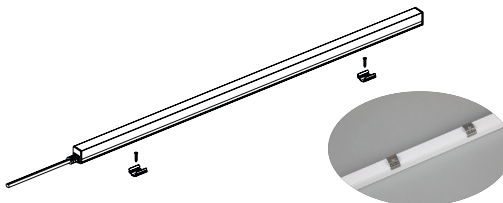

Fix the bracket to the mounting surface by screw firstly, and then clip the product into the bracket.



Surface Mounting