

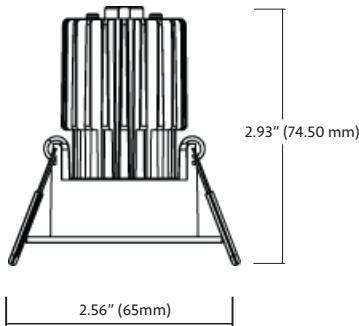




RAD15

SONIC 1.5

1.5" RECESSED LED DOWNLIGHT




FEATURES

Air-tight and wet location approved
 Type Ic rated - approved for direct contact with insulation
 Downlight housing is not required even for insulated ceilings
 Spring loaded mounting clips
 Quick connect wire allows for efficient installation
 Isolated driver inside junction box
 New construction plate available (NCH150)
 Optional Emergency Backup
 5 year warranty

SPECIFICATIONS

Input Voltage	120 or 277V AC
Wattage	7W
Lumen	600lm
Efficacy(LPW)	>82 lm/W
Color Temp	27K/ 30K/ 35K/ 40K
CRI	>90
Beam Angle	36°
Dimming	Triac or 0-10V (with 277V driver)
Lamp Life	50,000hr
Environment	IP65 Wet Location
Material	Aluminum Body with Anodized Heat Sink
Operating Temp	-4°F - 104°F
Cut out	2 inches

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

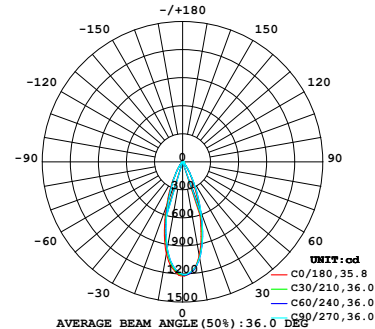

ORDERING GUIDE

RAD15 ____ - 7 - ____ - ____ - 36 - ____ - ____

Example: RAD15R-7-30K-120-36-WT-EM

TRIM	Wattage	Color Temp	Input Voltage	Beam Angle	Trim Finish	EM
RAD15R (Round)	7 (600lm)	2700K	120 (Triac Dim)	36°	WT White	EM
RAD15S (Square)		3000K	277 (0-10V Dim)		BK Black	
		3500K			BN Brushed Nickel	
		4000K			GD Gold	
					BZ Bronze	
					CP Copper	

***QUICKSHIP CONFIGURATION - 120V 36 DEGREE BEAM ANGLE**



PROJECT:

PREPARED BY:


TYPE:



RAD15 SONIC 1.5

1.5" RECESSED LED DOWNLIGHT

ACCESSORIES / OPTIONS

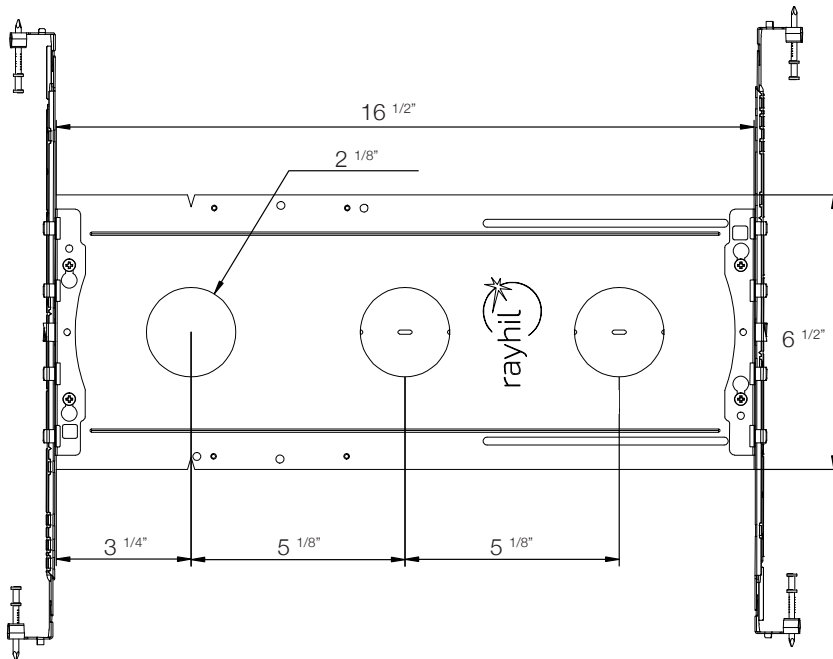


NEW CONSTRUCTION MOUNTING PLATE NCH150

Constructed out of galvanized steel

Magnetic plate and driver facilitate easy and secure placement

Adjustable Hanger Bars up to 24"

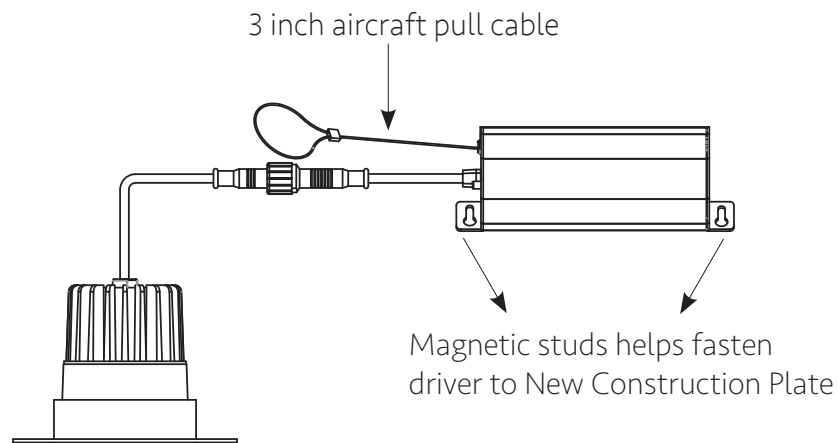

PROJECT:

PREPARED BY:

TYPE:




RAD15 SONIC 1.5


1.5" RECESSED LED DOWNLIGHT

TRIM COLOR OPTIONS


White	WT
Black	BK
Brushed nickel	BN
Gold	GD
Bronze	BZ
Copper	CP




Existing Trim




RAD15R-BK




RAD15R-BN



RAD15R-GD



RAD15R-BZ




RAD15R-CP



Existing Trim




RAD15S-BK



RAD15S-BN



RAD15S-GD



RAD15S-BZ



RAD15S-CP



RAD15 SONIC 1.5


1.5" RECESSED LED DOWNLIGHT

EMERGENCY BACK UP DRIVER

RAD15-EM

90 minute run time

See spec sheet for further information

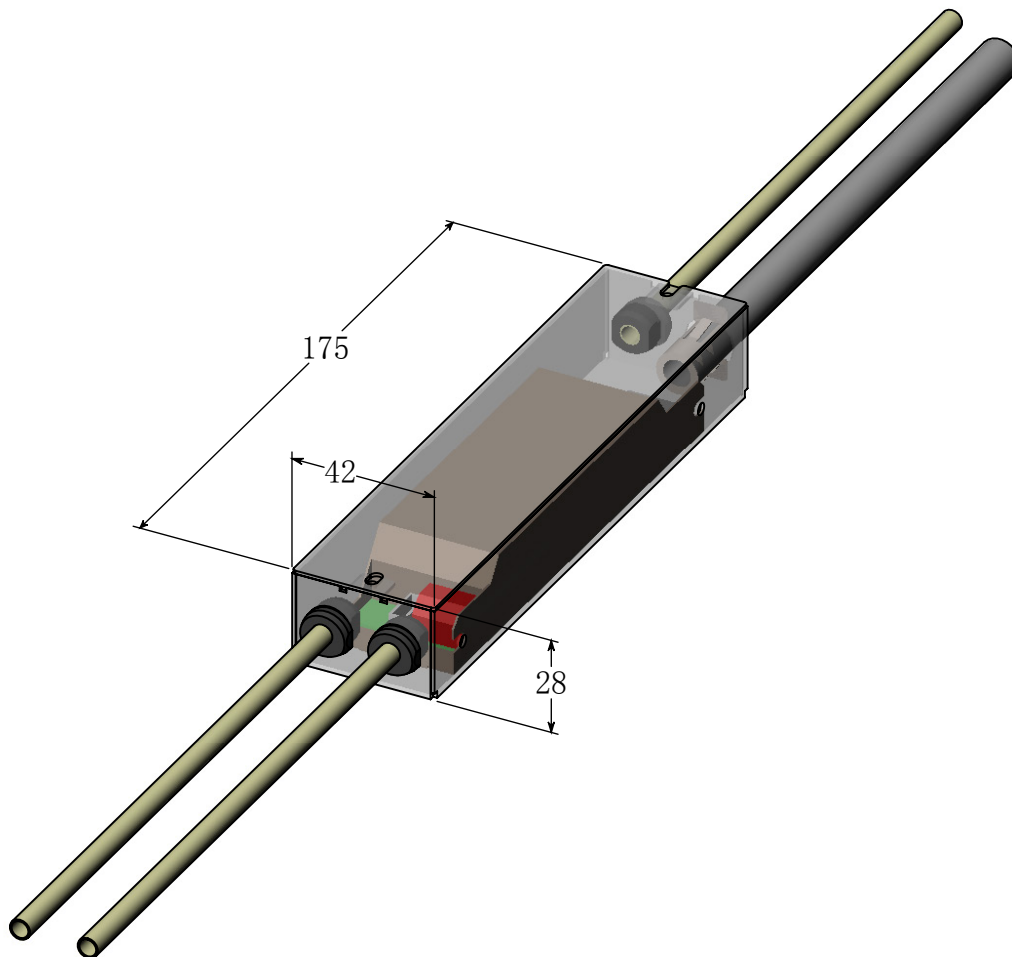

PROJECT:

PREPARED BY:

TYPE:



RAD15 SONIC 1.5

1.5" RECESSED LED DOWNLIGHT

COMPATIBLE DIMMERS

LUTRON	LOAD (W)
SKYLARK CONTOUR LECL-153P	150W
SKYLARK CONTOUR CTCL-150H	150W
SKYLARK CONTOUR LGCL-153PLH	150W
SKYLARK CONTOUR CTCL-153P	150W
SKYLARK CONTOUR SCL-153P	150W
SKYLARK CONTOUR S-600P	600W
CASETA PD-6WCL	600W
CASETA PD-5NE	150W
CASETA PD-10NXD	250W
DIVA DVCL-153P	150W
TOGGLER TGCL-153P	150W
ARIADNI AYCL-153P	150W
MAESTRO MACL-153M	150W

LEVITON	LOAD (W)
ILLUMATEC IPL06	150W
SURESLIDE 6672	150W
SURESLIDE 6674	150W
EATON	
SMART DIMMER AAL06	300W
PASS & SEYMOUR	
HARMONY DCL453PTCCCV6	150W
GE	
ROCKER 10464	150W
TOGGLE 18027	150W