




RAD25
SONIC 2.5
SSSED LED DOWNLIGHT


9W



FEATURES

- Air-tight and wet location approved
- Type Ic rated - approved for direct contact with insulation
- Downlight housing is not required for insulated ceilings
- Quick connect wire allows for efficient installation
- Isolated driver inside junction box
- New construction plate available (NCH250)
- Optional Emergency Backup
- 5 year warranty


14W



SPECIFICATIONS

Input Voltage	120- 277V
Wattage	9/14W
Lumen	800/1100lm
Efficacy(LPW)	>82 lm/W
Color Temp	27K, 30K, 35K, 40K, 50K (CCT adj.)
CRI	>90
Beam Angle	24°/38°/50°
Dimming	Triac & 0-10V
Lamp Life	50,000hr
Environment	IP65 Wet Location
Material	Aluminum Body with Anodized Heat Sink
Operating Temp	-4°F - 104°F
Cut out	2.36 inches

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

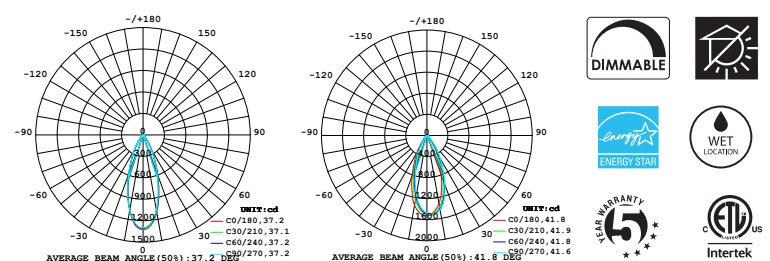

ORDERING GUIDE

RAD25 - - - UNV - - - *Example RAD25R-9-CCT-UNV-24-HX-WT-EM-CP*

TRIM	Wattage	Color Temperature	Input Voltage	Beam Angle	Lens	Trim Finish	EM	Protection
RAD25R (Round) RAD25S (Square)	9 (800lm) 14 (1100lm)	CCT adj. (27K, 30K, 35K, 40K, 50K) 3000K 3500K 4000K	UNV (120-277V)	24° 38° 50°	HX Hex Louver	WT White BK Black BN Brushed Nickel GD Gold BZ Bronze CP Copper	EM	None (Leave Blank) CP Chicago Plenum


***QUICKSHIP CONFIGURATION - 120V 38 DEGREE BEAM ANGLE**



RAD25 SONIC 2.5

2.5" RECESSED LED DOWNLIGHT

ACCESSORIES / OPTIONS

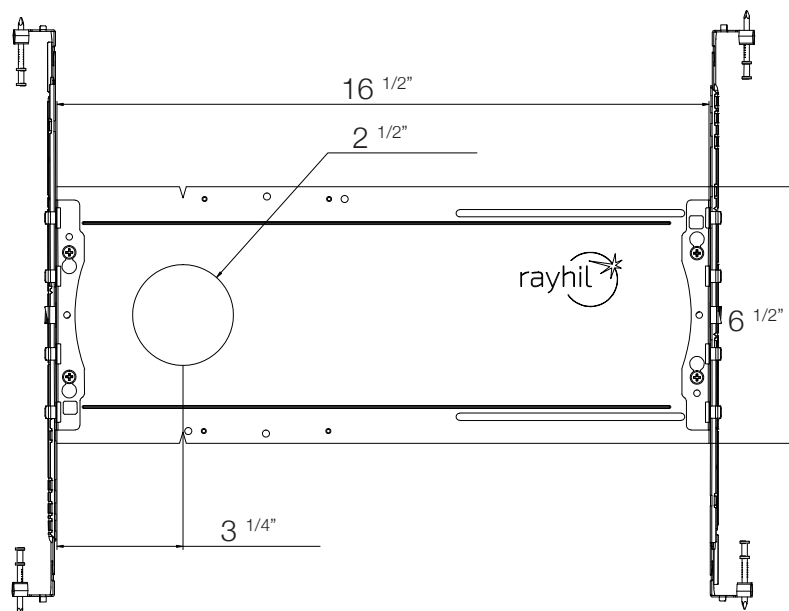


NEW CONSTRUCTION MOUNTING PLATE NCH250

Constructed out of galvanized steel

Magnetic plate and driver facilitate easy and secure placement

Adjustable Hanger Bars up to 24"

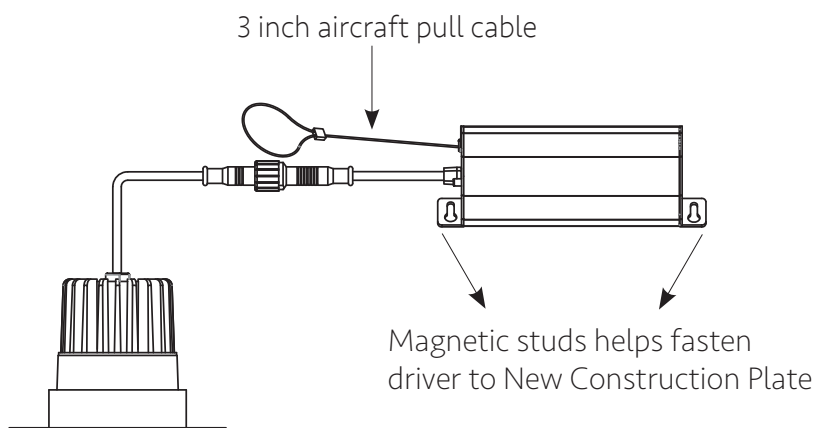

PROJECT:

PREPARED BY:

TYPE:




RAD25 SONIC 2.5


2.5" RECESSED LED DOWNLIGHT

TRIM COLOR OPTIONS


White	WT
Black	BK
Brushed nickel	BN
Gold	GD
Bronze	BZ
Copper	CP




Existing Trim




RAD25-BK




RAD25R-BN



RAD25R-GD



RAD25R-BZ




RAD25R-CP



Existing Trim




RAD25S-BK




RAD25S-BN



RAD25S-GD



RAD25S-BZ



RAD25S-CP

PROJECT:


PREPARED BY:

TYPE:




RAD25 SONIC 2.5

2.5" RECESSED LED DOWNLIGHT

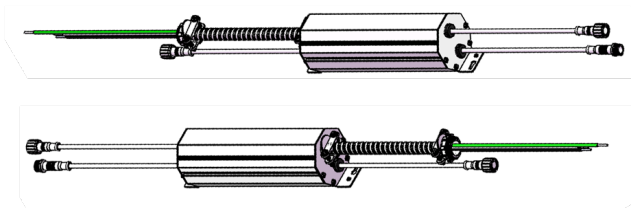

EMERGENCY BACK UP DRIVER RAD25/35-EM

90 minute run time
See spec sheet for further information

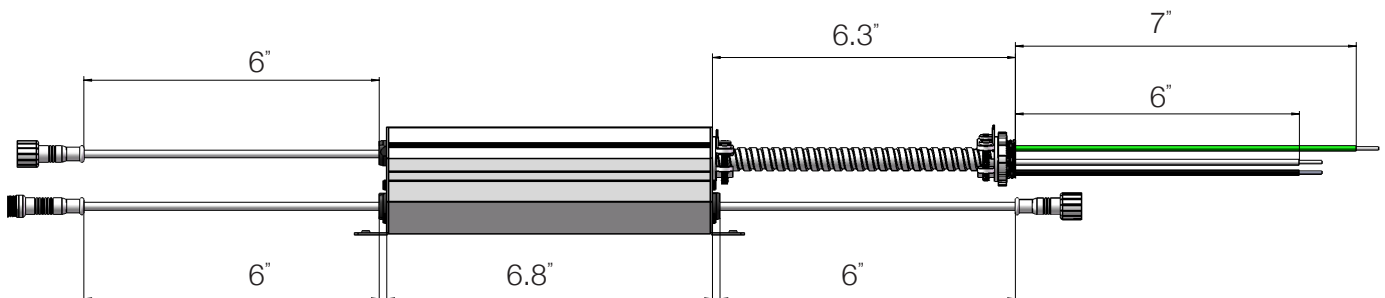

PROJECT:

PREPARED BY:

TYPE:



RAD25 SONIC 2.5

2.5" RECESSED LED DOWNLIGHT

COMPATIBLE DIMMERS

LUTRON	LOAD (W)
SKYLARK CONTOUR LECL-153P	150W
SKYLARK CONTOUR CTCL-150H	150W
SKYLARK CONTOUR LGCL-153PLH	150W
SKYLARK CONTOUR CTCL-153P	150W
SKYLARK CONTOUR SCL-153P	150W
SKYLARK CONTOUR S-600P	600W
CASETA PD-6WCL	600W
CASETA PD-5NE	150W
CASETA PD-10NXD	250W
DIVA DVCL-153P	150W
TOGGLER TGCL-153P	150W
ARIADNI AYCL-153P	150W
MAESTRO MACL-153M	150W

LEVITON	LOAD (W)
ILLUMATEC IPL06	150W
SURESLIDE 6672	150W
SURESLIDE 6674	150W
EATON	
SMART DIMMER AAL06	300W
PASS & SEYMOUR	
HARMONY DCL453PTCCCV6	150W
GE	
ROCKER 10464	150W
TOGGLE 18027	150W