


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: RAD35R-15-CCT-UNV-50C-WT	TYPE:2700K CRI90	WEIGHT:
SPEC.:50D	DIM.:	SERIAL No.:1
MFR.:	SUR.:Φ74MM	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 69.71 lm/W
MODEL		I _{max} (cd)	1180	S/MH (C0/180)	0.84	
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH (C90/270)	0.83	
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1038.4	η UP,DN (C0-180)	0.0,50.4	
NOMINAL FLUX(lm)	1038.38	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.0,49.6	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)	120	η down (%)	100.0	CIBSE SHR MAX	0.95	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

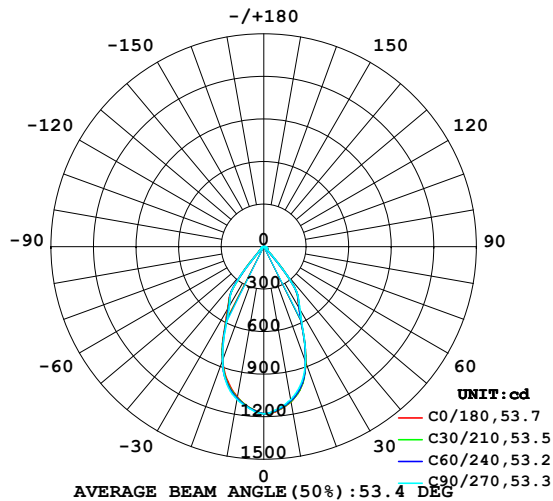

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

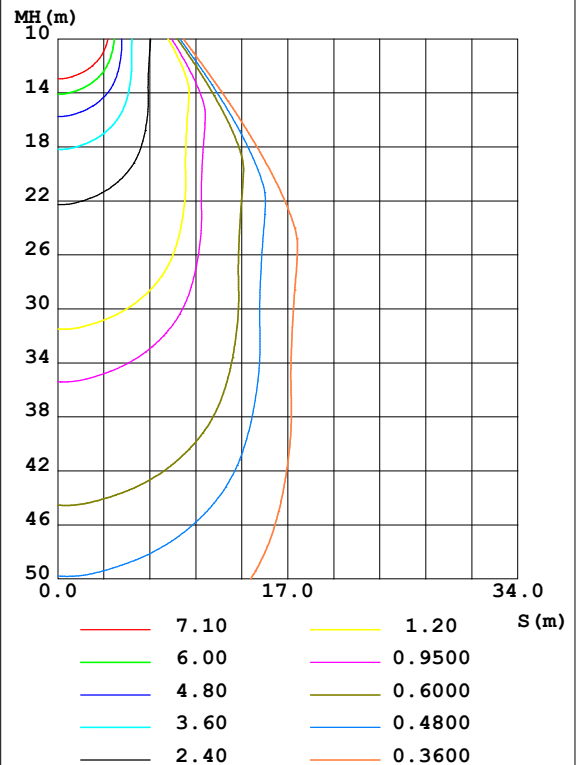

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-06-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1111	1109	1095	1083	1078	1083	1094	1102	0- 10	108.0	108.0	10.4,10.4
20	866.4	870.8	860.9	854.0	850.5	850.2	850.7	852.3	10- 20	278.6	386.6	37.2,37.2
30	498.7	504.3	512.2	521.0	513.4	497.6	489.9	491.0	20- 30	302.4	689.1	66.4,66.4
40	212.1	215.6	209.7	215.8	205.2	191.3	197.7	196.8	30- 40	242.4	931.4	89.7,89.7
50	29.49	29.01	29.24	29.91	29.72	29.33	29.73	29.48	40- 50	52.26	983.7	94.7,94.7
60	22.08	21.77	21.60	21.82	22.03	22.12	22.30	22.27	50- 60	22.45	1006	96.9,96.9
70	16.86	16.68	16.42	16.64	16.85	17.01	17.22	17.04	60- 70	19.47	1026	98.8,98.8
80	4.014	3.950	3.725	3.842	3.785	3.800	3.933	3.884	70- 80	11.63	1037	99.9,99.9
90	0.1456	0.1408	0.1415	0.1391	0.2084	0.2040	0.1935	0.1999	80- 90	1.161	1038	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 969.3 lm

%lum = 93.3%

%lamp = 93.3%

Conical surface Flux(120deg): 1006.1 lm

%lum = 96.9%


%lamp = 96.9%

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-06-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:5.620m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: RAD35R-15-CCT-UNV-50C-WT	TYPE:2700K CRI90	WEIGHT:
SPEC.:50D	DIM.:	SERIAL No.:1
MFR.:	SUR.:Φ74MM	Shielding Angle:

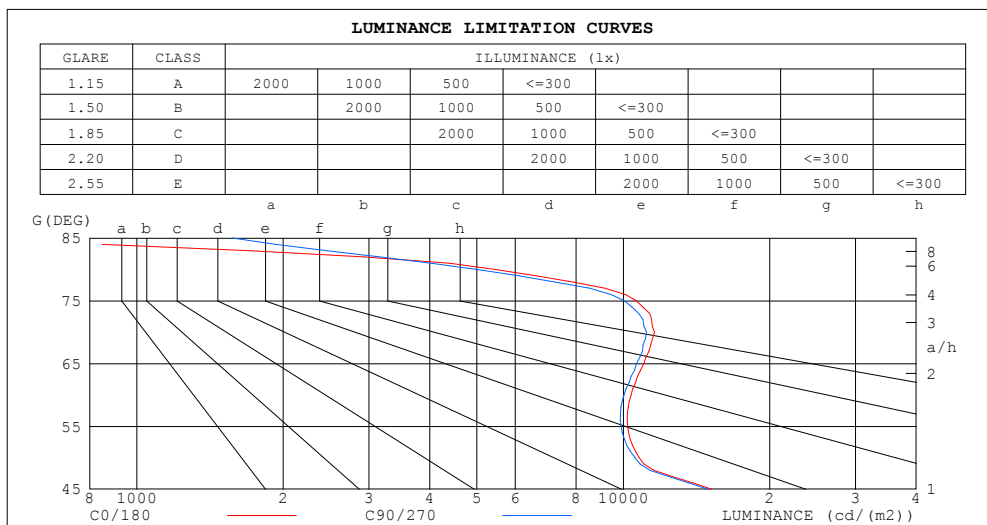


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-06-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: RAD35R-15-CCT-UNV-50C-WT	TYPE:2700K CRI90	WEIGHT:
SPEC.:50D	DIM.:	SERIAL No.:1
MFR.:	SUR.:Φ74MM	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.10	1.07	1.05	1.08	1.06	1.03	1.04	1.02	1.00	1.00	.99	.97	.97	.96	.94	.93
2.0	1.02	.98	.94	1.00	.96	.93	.97	.94	.91	.94	.91	.89	.91	.89	.87	.85
3.0	.95	.89	.85	.93	.88	.84	.90	.86	.83	.88	.85	.82	.86	.83	.80	.79
4.0	.88	.82	.78	.87	.81	.77	.85	.80	.76	.83	.79	.75	.81	.77	.75	.73
5.0	.82	.76	.72	.81	.76	.71	.79	.74	.71	.78	.73	.70	.76	.72	.69	.68
6.0	.77	.71	.66	.76	.70	.66	.75	.69	.66	.73	.69	.65	.72	.68	.65	.63
7.0	.72	.66	.62	.72	.66	.62	.70	.65	.61	.69	.64	.61	.68	.64	.60	.59
8.0	.68	.62	.58	.67	.62	.57	.66	.61	.57	.65	.60	.57	.64	.60	.57	.55
9.0	.64	.58	.54	.64	.58	.54	.63	.57	.54	.62	.57	.53	.61	.57	.53	.52
10.0	.61	.55	.51	.60	.54	.51	.59	.54	.50	.59	.54	.50	.58	.53	.50	.49

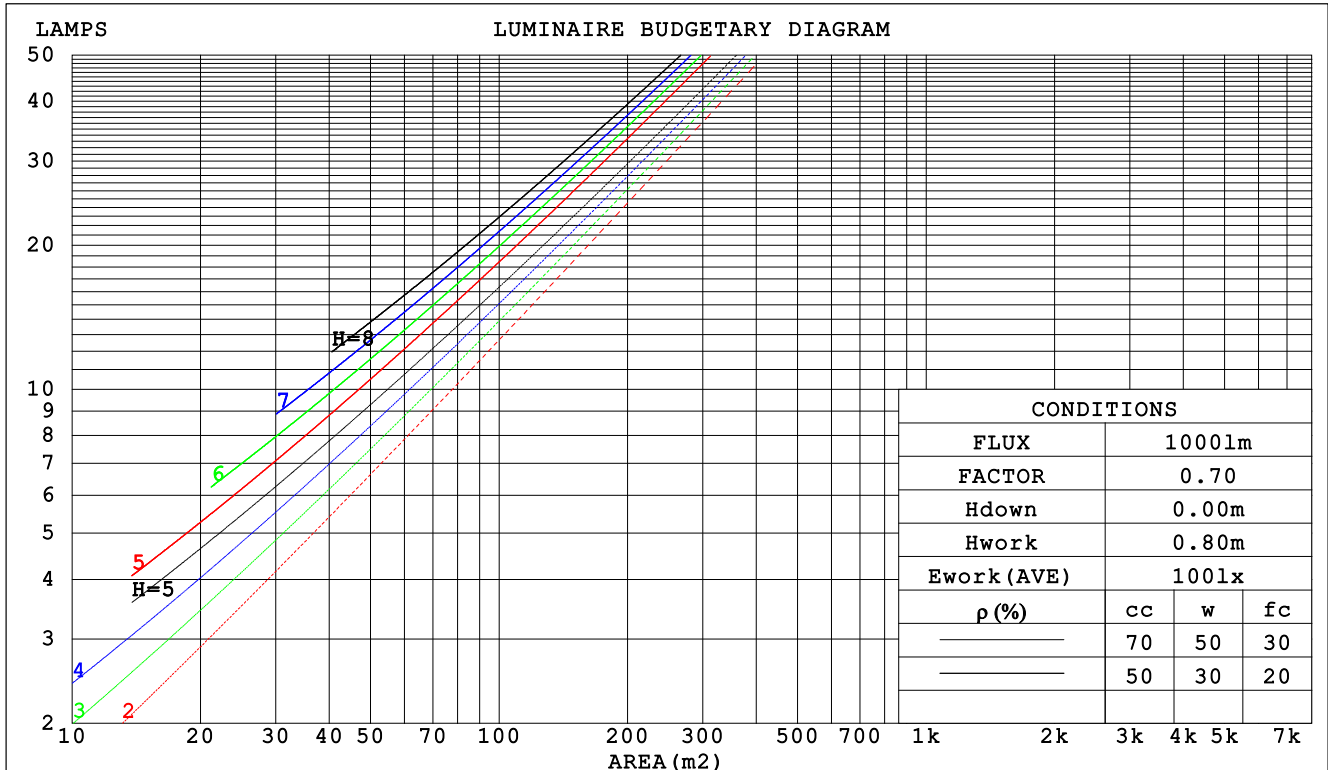

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-06-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: RAD35R-15-CCT-UNV-50C-WT	TYPE:2700K CRI90	WEIGHT:
SPEC.:50D	DIM.:	SERIAL No.:1
MFR.:	SUR.:Φ74MM	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.190	.108	.034	.184	.105	.033	.171	.098	.031	.159	.092	.029	.149	.086	.028		
2.0	.182	.100	.031	.176	.097	.030	.166	.092	.029	.156	.087	.027	.147	.083	.026		
3.0	.173	.092	.028	.168	.090	.027	.159	.086	.026	.150	.082	.025	.142	.079	.024		
4.0	.164	.085	.025	.159	.083	.025	.151	.080	.024	.144	.077	.023	.137	.075	.023		
5.0	.155	.079	.023	.152	.078	.023	.145	.075	.022	.138	.073	.022	.132	.071	.021		
6.0	.148	.074	.021	.144	.073	.021	.138	.071	.021	.133	.069	.020	.127	.067	.020		
7.0	.141	.069	.020	.138	.069	.020	.132	.067	.019	.127	.065	.019	.122	.064	.019		
8.0	.134	.066	.018	.132	.065	.018	.127	.063	.018	.122	.062	.018	.118	.061	.018		
9.0	.128	.062	.017	.126	.061	.017	.122	.060	.017	.117	.059	.017	.114	.058	.017		
10.0	.123	.059	.016	.121	.058	.016	.117	.057	.016	.113	.056	.016	.109	.055	.016		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.172	.157	.144	.147	.135	.124	.101	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.158	.132	.111	.135	.114	.096	.093	.079	.067	.053	.046	.039	.017	.015	.013	
3.0	.146	.114	.088	.125	.098	.076	.086	.068	.054	.050	.040	.032	.016	.013	.010	
4.0	.136	.099	.071	.116	.086	.062	.080	.060	.043	.046	.035	.026	.015	.011	.008	
5.0	.127	.088	.058	.109	.076	.051	.075	.053	.036	.044	.031	.021	.014	.010	.007	
6.0	.120	.078	.049	.103	.068	.042	.071	.048	.030	.041	.028	.018	.013	.009	.006	
7.0	.113	.071	.041	.098	.061	.036	.067	.043	.025	.039	.025	.015	.013	.008	.005	
8.0	.108	.065	.035	.093	.056	.031	.064	.039	.022	.037	.023	.013	.012	.008	.004	
9.0	.103	.060	.031	.088	.052	.027	.061	.036	.019	.036	.021	.011	.012	.007	.004	
10.0	.098	.055	.027	.084	.048	.023	.059	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-06-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: RAD35R-15-CCT-UNV-50C-WT					TYPE:2700K CRI90					WEIGHT:				
SPEC.:50D					DIM.:					SERIAL No.:1				
MFR.:					SUR.:Φ74MM					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					20.4	21.4	20.6	21.6	21.8	20.4	21.4	20.6	21.5	21.7
3H					20.7	21.6	21.0	21.8	22.1	20.7	21.6	20.9	21.8	22.0
4H					20.9	21.8	21.2	22.0	22.2	20.8	21.7	21.1	21.9	22.2
6H					21.0	21.8	21.3	22.0	22.3	20.9	21.7	21.2	21.9	22.2
8H					20.9	21.7	21.2	22.0	22.2	20.8	21.6	21.1	21.9	22.1
12H					20.9	21.6	21.2	21.9	22.2	20.8	21.5	21.1	21.8	22.1
4H 2H					20.3	21.2	20.6	21.4	21.7	20.3	21.2	20.6	21.4	21.6
3H					20.8	21.6	21.2	21.9	22.1	20.8	21.5	21.1	21.8	22.1
4H					21.1	21.8	21.5	22.1	22.4	21.1	21.7	21.4	22.0	22.3
6H					21.2	21.8	21.6	22.2	22.5	21.1	21.7	21.5	22.1	22.4
8H					21.2	21.8	21.6	22.1	22.5	21.1	21.7	21.5	22.0	22.4
12H					21.2	21.7	21.6	22.0	22.4	21.1	21.6	21.5	21.9	22.3
8H 4H					21.2	21.7	21.6	22.1	22.4	21.1	21.6	21.5	22.0	22.4
6H					21.3	21.8	21.7	22.1	22.6	21.2	21.6	21.6	22.0	22.5
8H					21.3	21.7	21.7	22.1	22.5	21.2	21.6	21.6	22.0	22.4
12H					21.2	21.6	21.7	22.0	22.5	21.1	21.5	21.6	21.9	22.4
12H 4H					21.1	21.6	21.5	22.0	22.4	21.0	21.6	21.5	21.9	22.3
6H					21.3	21.7	21.7	22.1	22.5	21.2	21.6	21.6	22.0	22.4
8H					21.2	21.6	21.7	22.0	22.5	21.1	21.5	21.6	21.9	22.4
Variations with the observer position at spacings:														
S = 1.0H					+ 2.5 / - 3.2					+ 2.5 / - 3.3				
1.5H					+ 4.8 / - 3.1					+ 4.9 / - 3.3				
2.0H					+ 0.6 / - 0.3					+ 0.6 / - 0.4				

CIE Pub.117, 1038 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.1)

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-06-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: RAD35R-15-CCT-UNV-50C-WT	TYPE:2700K CRI90	WEIGHT:
SPEC.:50D	DIM.:	SERIAL No.:1
MFR.:	SUR.:Φ74MM	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	79	75	85	78	74	84	78	74	71
0.80	93	87	83	92	86	82	91	86	82	78
1.00	97	91	88	97	91	87	95	91	87	83
1.25	102	96	92	101	95	92	99	94	91	87
1.50	104	99	96	103	99	95	101	97	94	89
2.00	107	103	100	106	102	99	103	100	97	92
2.50	109	105	102	108	104	101	105	102	99	93
3.00	111	107	104	109	106	103	106	103	101	95
4.00	113	110	108	111	109	106	107	105	104	97
5.00	115	112	110	112	110	109	108	107	105	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-06-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 5.620m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: RAD35R-15-CCT-UNV-50C-WT	TYPE:2700K CRI90	WEIGHT:
SPEC.:50D	DIM.:	SERIAL No.:1
MFR.:	SUR.:Φ74MM	Shielding Angle:

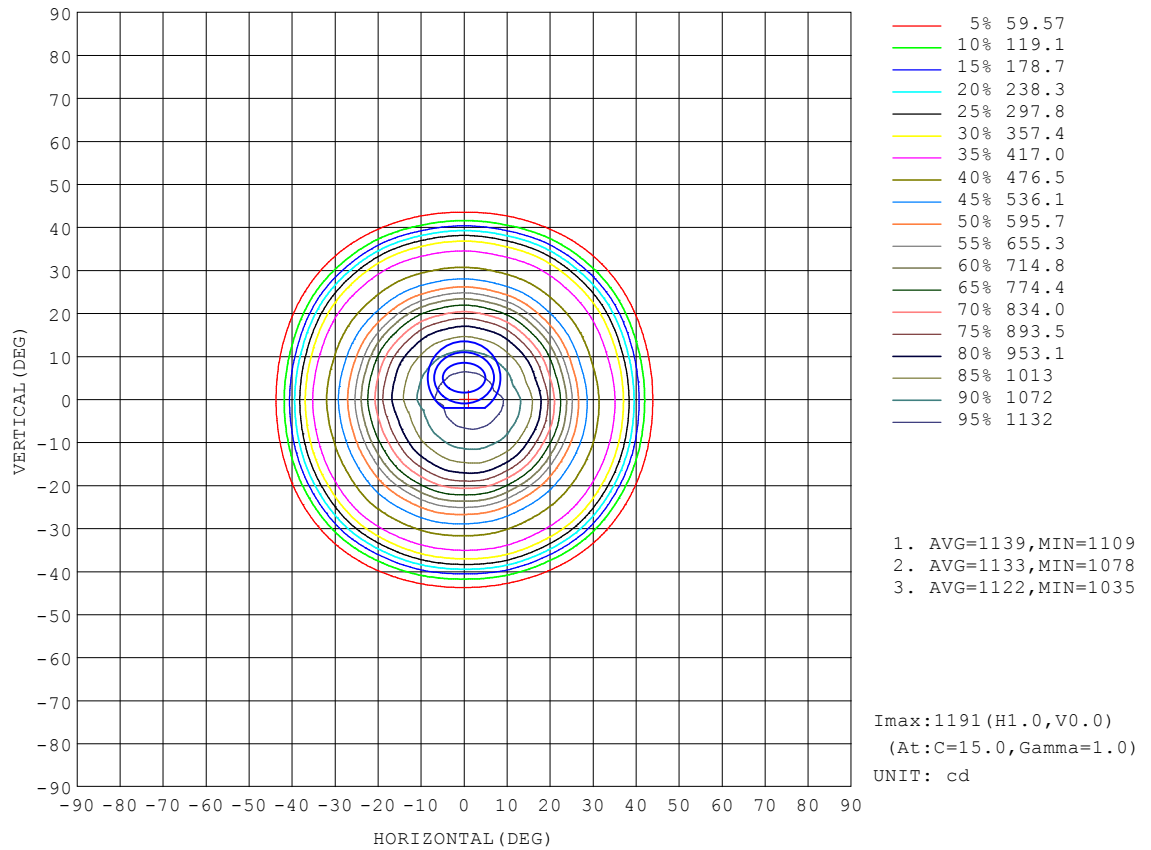


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-06-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

AAI Figure

NAME: RAD35R-15-CCT-UNV-50C-WT	TYPE:2700K CRI90	WEIGHT:
SPEC.:50D	DIM.:	SERIAL No.:1
MFR.:	SUR.:Φ74MM	Shielding Angle:

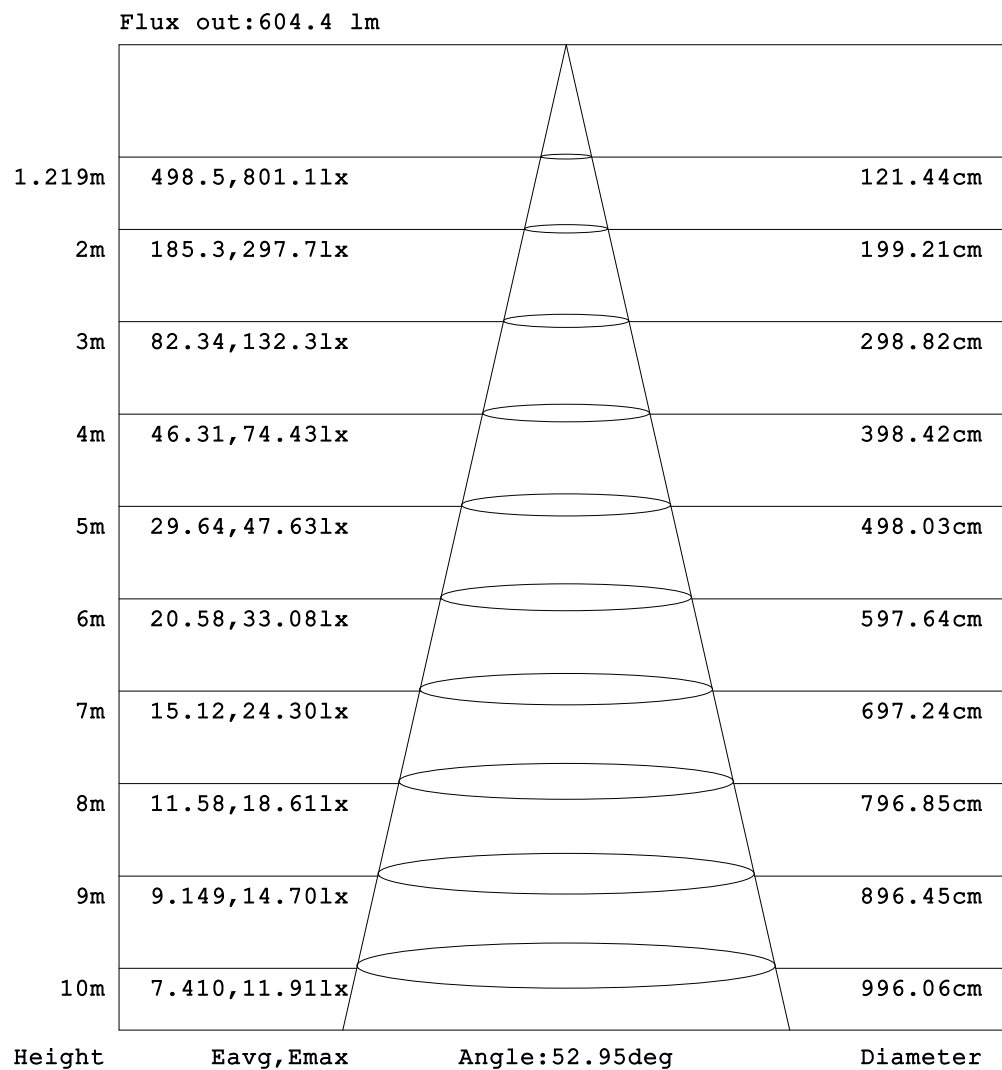


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-06-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 5.620m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: RAD35R-15-CCT-UNV-50C-WT	TYPE:2700K CRI90	WEIGHT:
SPEC.:50D	DIM.:	SERIAL No.:1
MFR.:	SUR.:Φ74MM	Shielding Angle:

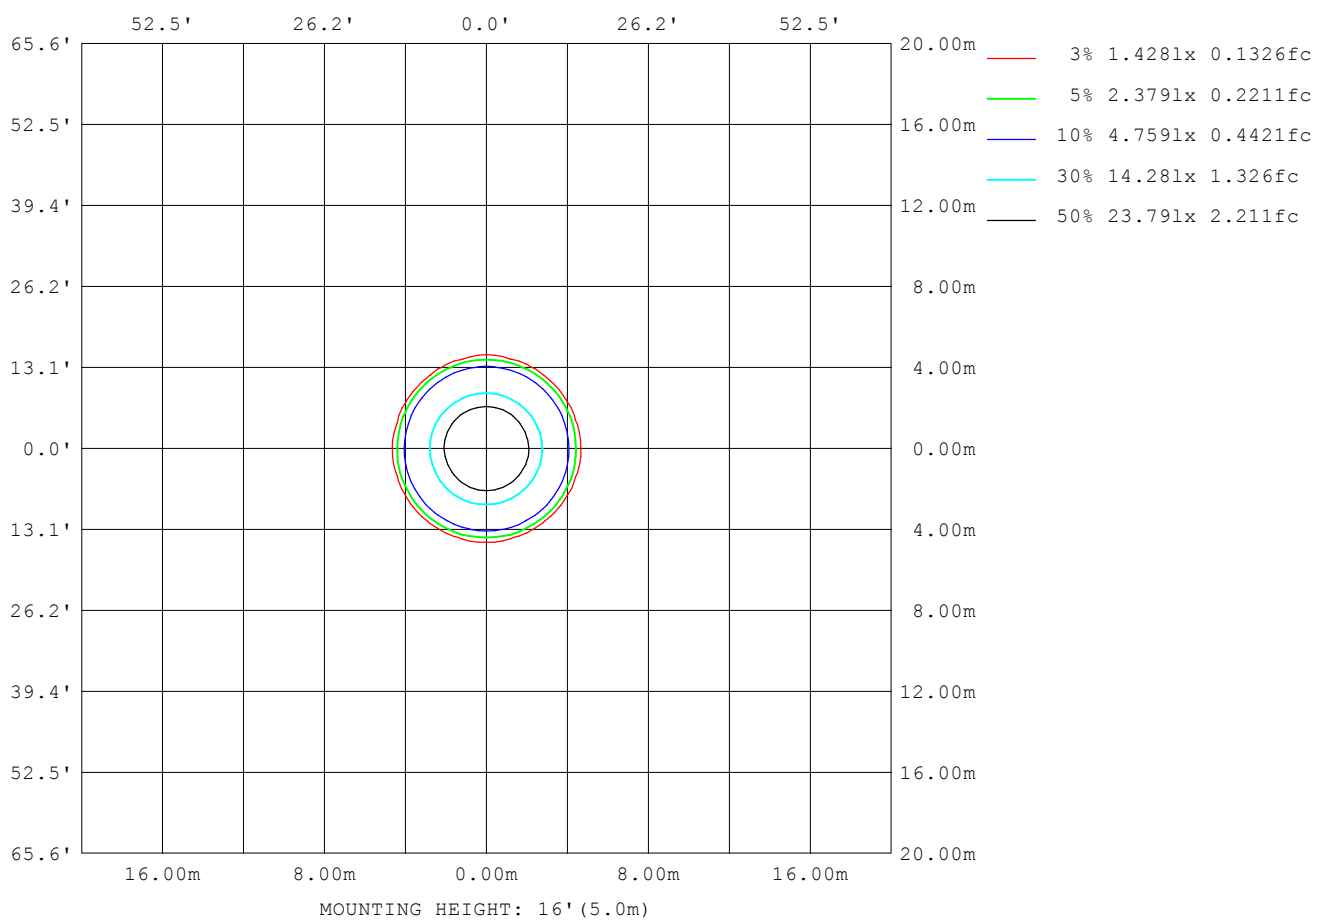

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-06-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: RAD35R-15-CCT-UNV-50C-WT	TYPE:2700K CRI90	WEIGHT:
SPEC.:50D	DIM.:	SERIAL No.:1
MFR.:	SUR.:Φ74MM	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10898
L_0~180 (75) av	10476
L_0~180 (85) av	896
L_90~270 (65) av	10884
L_90~270 (75) av	10400
L_90~270 (85) av	1632
L_45 (65) av	10897
L_45 (75) av	10433
L_45 (85) av	1651

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-06-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

Planar Illuminance Curve

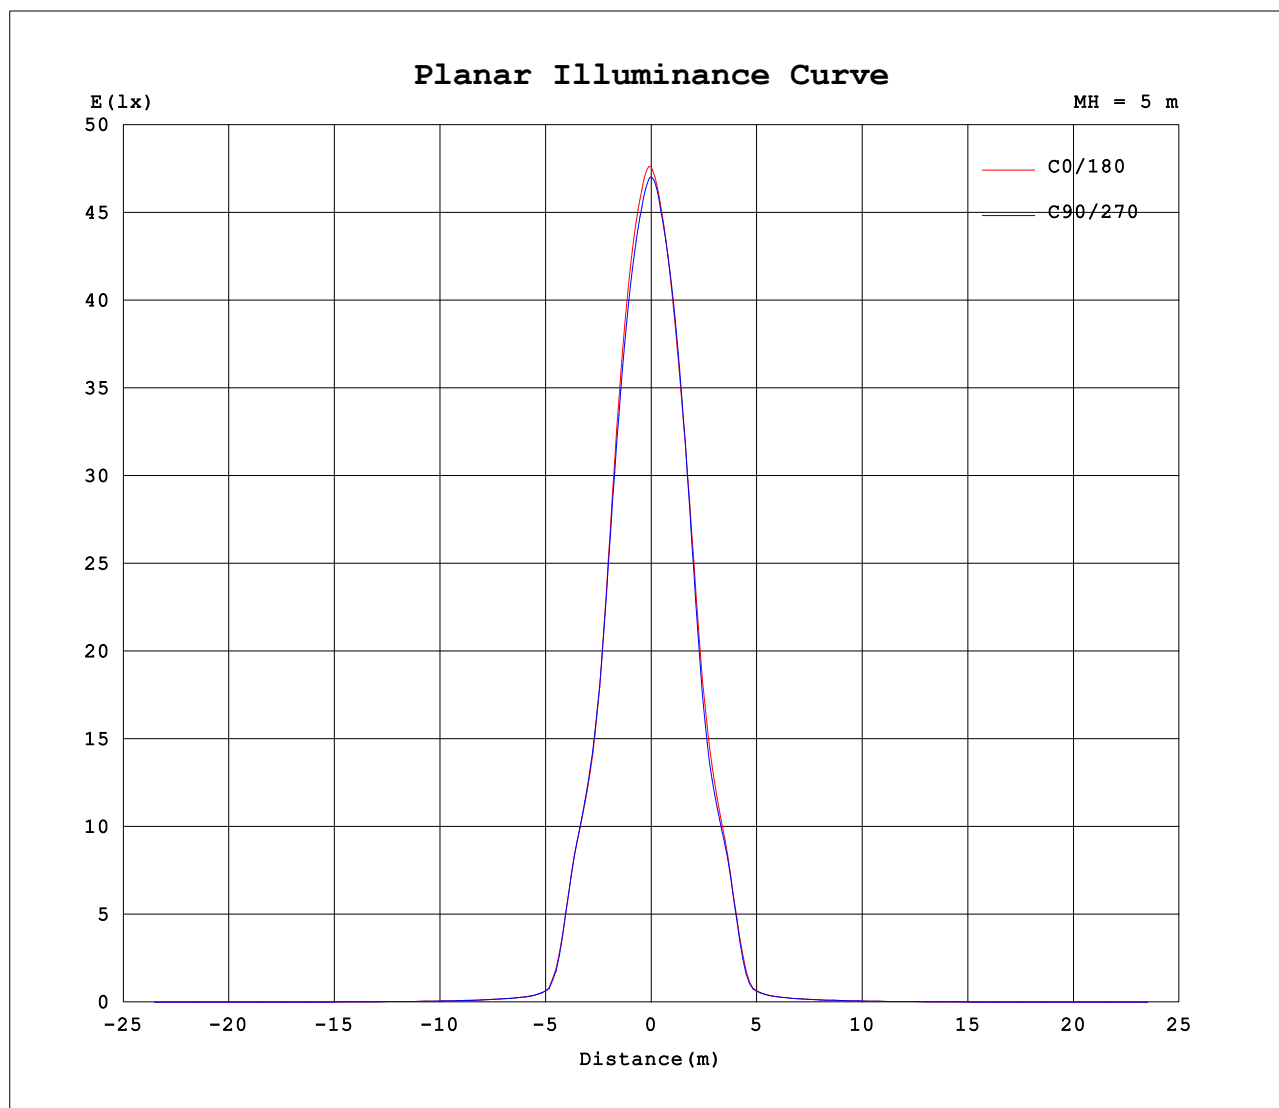

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-06-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 5.620m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

```