





RAD35 SONIC X

3.5" HIGH LUMENS RECESSED LED DOWNLIGHT




FEATURES

- Air-tight and wet location approved
- Type IC rated - approved for direct contact with insulation
- Downlight housing is not required even for insulated ceilings
- Spring loaded mounting clips
- Quick connect wire allows for efficient installation
- Isolated driver inside junction box
- New construction plate available (NCH350)
- Optional Emergency Backup
- 5 year warranty

SPECIFICATIONS

Input Voltage	110 or 277V AC
Wattage	23W
Lumen	2000lm
Efficacy(LPW)	>87 lm/W
Color Temp	27K, 30K, 35K, 40K, 50K (CCT adj.)
CRI	>90
Beam Angle	15°/ 24°/ 36°/50°
Dimming	Triac or 0-10V (with 277V driver)
Lamp Life	50,000hr
Environment	IP65 Wet Location
Material	Aluminum Body with Anodized Heat Sink
Operating Temp	-4°F - 104°F
Cut out	3.5 inches



ORDERING GUIDE

RAD35 _____ - **23** - _____ - _____ - _____ - _____ - _____ - _____ *Example: RAD35R-23-CCT-110-24C-WT-EM - CP*

TRIM	Wattage	Color Temperature	Input Voltage	Beam Angle	Lense	Trim Finish	EM	Protection
RAD35R (Round)	23 (2000lm)	CCT Adj. (27K, 30K, 35K, 40K, 50K) 3000K 3500K 4000K	120 (Triac Dim)	15°	C Clear	WT White	EM	None (Leave Blank) CP Chicago Plenum
RAD35S (Square)			277 (0-10V Dim)	24° 36° 50°	F Frosted P Pinhole W Wall Washing E Extension Plate 5" HX Hex Louver SL Solite	BK Black BN Brushed Nickel GD Gold BZ Bronze CP Copper		


***QUICKSHIP CONFIGURATION - CCT ADJ. 120V 36 DEGREE BEAM ANGLE CLEAR LENSE**



RAD35 SONIC X

3.5" HIGH LUMENS RECESSED LED DOWNLIGHT

ACCESSORIES / OPTIONS

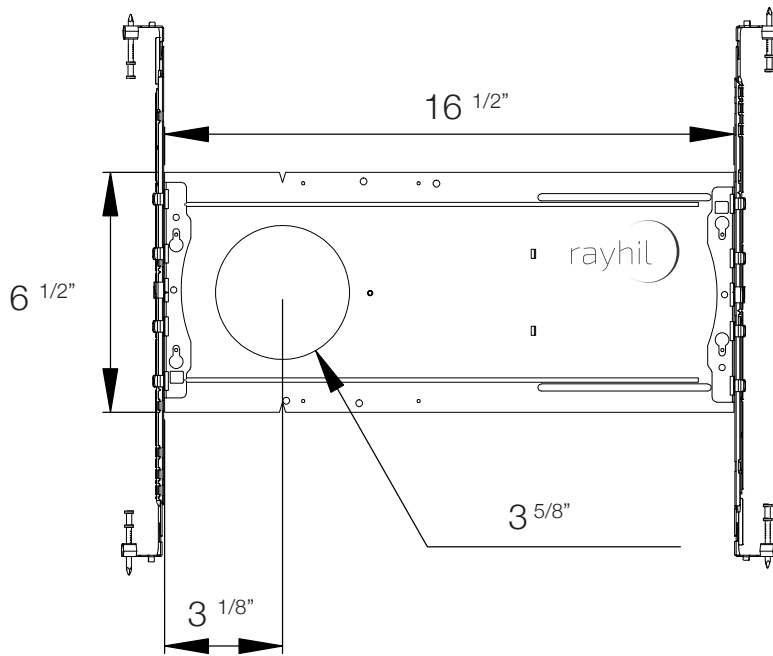


NEW CONSTRUCTION MOUNTING PLATE NCH350

Constructed out of galvanized steel

Magnetic plate and driver facilitate easy and secure placement

Adjustable Hanger Bars up to 24"

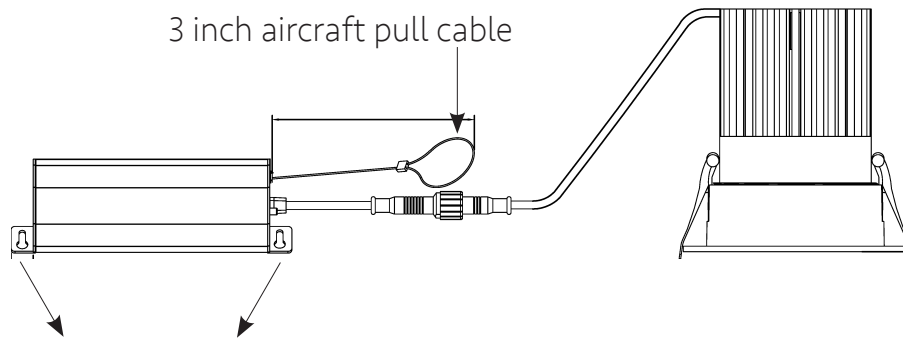

Magnetic studs helps fasten driver to New Construction Plate




RAD35 SONIC X


3.5" HIGH LUMENS RECESSED LED DOWNLIGHT

TRIM COLOR OPTIONS


White	WT
Black	BK
Brushed nickel	BN
Gold	GD
Bronze	BZ
Copper	CP




Existing Trim




RAD35R-BK




RAD35R-BN




RAD35R-GD




RAD35R-BZ




RAD35R-CP




Existing Trim




RAD35S-BK




RAD35S-BN



RAD35S-GD



RAD35S-BZ




RAD35S-CP




RAD35 SONIC X

3.5" HIGH LUMENS RECESSED LED DOWNLIGHT

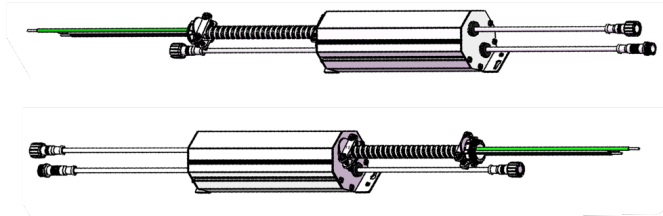

EMERGENCY BACK UP DRIVER RAD25/35-EM

90 minute run time
See spec sheet for further information

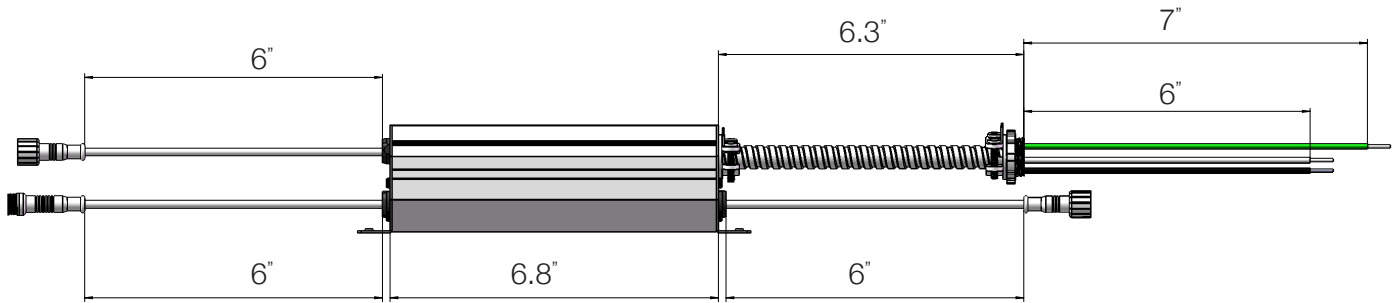



RAD35 SONIC X

3.5" HIGH LUMENS RECESSED LED DOWNLIGHT

COMPATIBLE DIMMERS

LUTRON	LOAD (W)	LEVITON	LOAD (W)
SKYLARK CONTOUR LECL-153P	150W	ILLUMATEC IPL06	150W
SKYLARK CONTOUR CTCL-150H	150W	SURESLIDE 6672	150W
SKYLARK CONTOUR LGCL-153PLH	150W	SURESLIDE 6674	150W
SKYLARK CONTOUR CTCL-153P	150W		
SKYLARK CONTOUR SCL-153P	150W	EATON	
SKYLARK CONTOUR S-600P	600W	SMART DIMMER AAL06	300W
CASETA PD-6WCL	600W		
CASETA PD-5NE	150W	PASS & SEYMOUR	
CASETA PD-10NXD	250W	HARMONY DCL453PTCCCV6	150W
DIVA DVCL-153P	150W		
TOGLER TGCL-153P	150W	GE	
ARIADNI AYCL-153P	150W	ROCKER 10464	150W
MAESTRO MACL-153M	150W	TOGGLE 18027	150W