




STK STRIKE

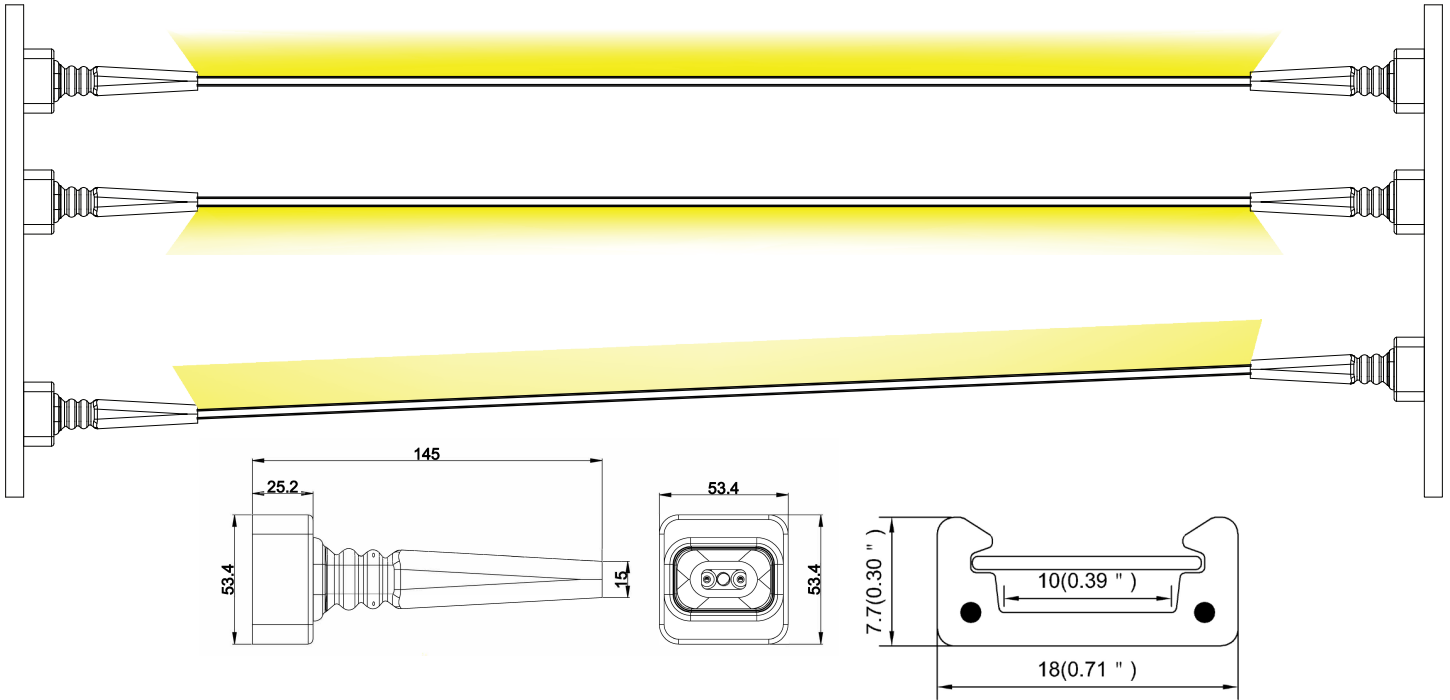

FEATURES

The Strike series grants creative opportunities that are seldom seen in the Lighting industry. Each space can be uniquely transformed by these LED Linear Strips. Unlimited shapes and formations can be designed to ensure a timeless intrigue. The COB Strip technology creates a seamless and transitional light output, without any interruptions such as with standard LED Chips. Black and White finishes available.

SPECIFICATIONS

Diffuser	PC diffused cover
Length	Custom lengths available up to 40 ft.
Lumens	412lm/ft.
Weight	0.252kg/m
Max LED Strip Width	10mm
Material	Silicone
Finish	Black / White
Installation	Wall Mounting

ORDERING GUIDE

STK - - -

Example: STK-16-30-BK

TYPE	LENGTH	COLOR TEMPERATURE		WATTAGE	LUMENS	VOLTAGE	FINISH
STK	Custom Length available up to 40 FT.	30	3000K	4.6W/FT	412LM/FT	24V	BK Black WT White (custom order)
		35	3500K				
		40	4000K				

*CONTACT FOR QUICKSHIP OPTIONS


- Runs can not exceed 20 feet per home run
- Maximum driver distance of 20 feet before voltage drop (with 18 gage wire)
- Driver sold separately

*** COMPATIBLE WITH ELECTRONIC DRIVER ONLY ***





STK STRIKE

COB STRIP ROLL


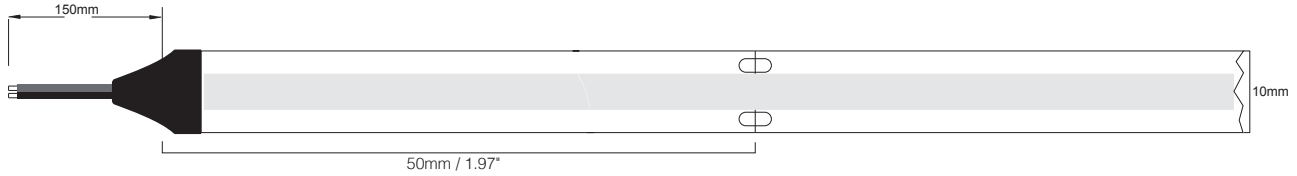


• Wattage	4.6W/FT	• Dimming	Triac
• Input Power	24V	• Length per Roll	20ft.
• CRI	80	• Ambient Temperature	-20 °C to 40 °C
• LED Chip	COB	• Height x Width	0.08" x 0.39"
• Environment	IP20	• Adhesive	3M
• Maximum Run	20ft.	• Warranty	5 years
• Certification	UL / ETL		



3000K

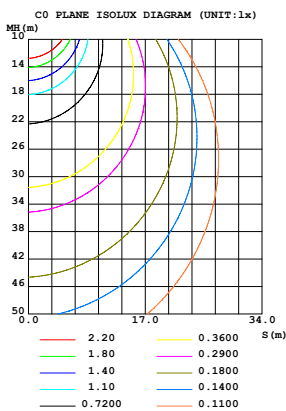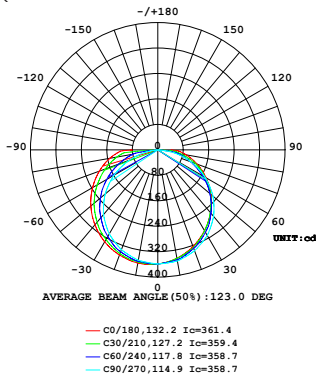

3500K

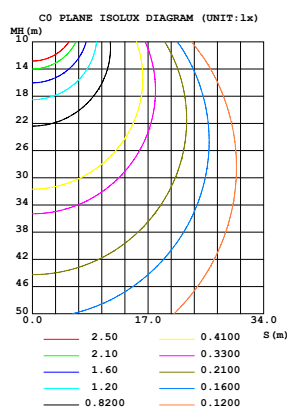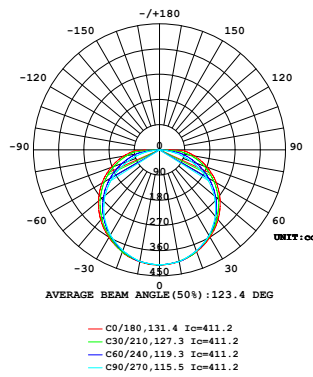

4000K

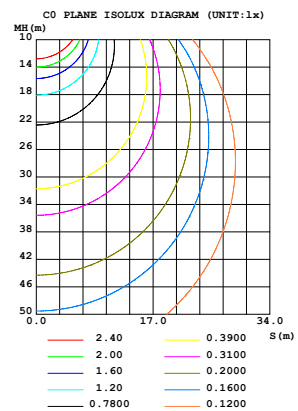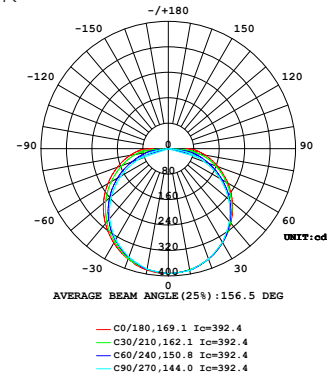






STK STRIKE

DRIVERS

*Driver sold separately

FEATURES

- Output constant voltage
- Built-in PFC function
- Protections: short circuit/ over voltage/ over heat
- Cooling by free air convection
- Flicker-free
- Work with leading edge & trailing edge triac dimmers
- Class 2, Class P, Type HL, CE, UL, FCC compliant
- PWM output, does not change the color index
- Metal housing
- Suitable for dry location
- Strong compatibility, flicker-free dimming
- Suitable for LED lighting and moving sign applications
- Compliance to worldwide safety regulations for lightings.
- Compatible with Forward phase, Reverse phase, Triac, MLV, ELV Dimmers
- 3 years warranty

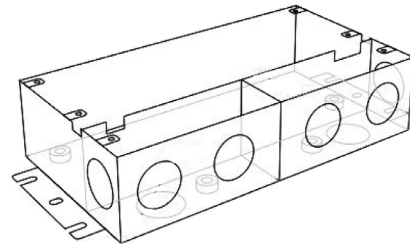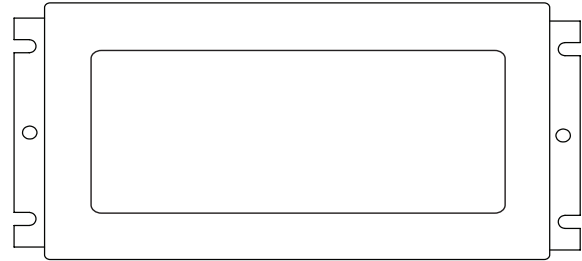

SPECIFICATIONS


WATTAGE	96W	120W	200W	300W
MODEL	STK-96-DIM	STK-120-DIM	STK-200-DIM	STK-300-DIM
VOLTAGE	24V			
PF	>0.95	>0.99	>0.99	>0.99
EFFICIENCY	>88%	>87%	>88%	>87%
INPUT VOLTAGE	AC 100-277V			
CURRENT	4A	5A	8.33A	12.5A
LOAD REGULATION	1±			
DIMMING RANGE	0~100%			
DIMENSIONS	8.66" x 3.6" x 1.61"	8.66" x 3.6" x 1.61"	10.23" x 4.05" x 1.81"	10.94" x 4.25" x 1.81"




STK STRIKE

Steps of Installation


1. Mounting the canopy on the wall

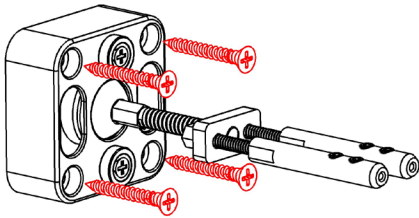


2. Cut off the excess TPV & PC diffused cover




3. Leave a certain length of wire rope

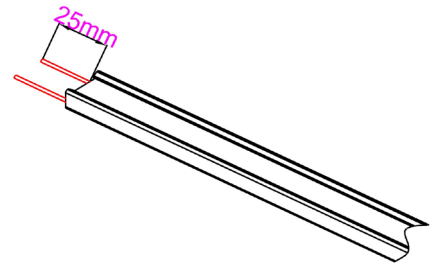


4. Stick the led strip

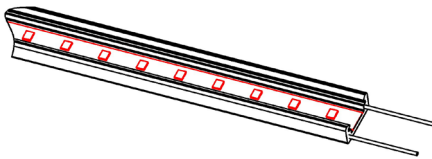


5. Click the PC diffused cover

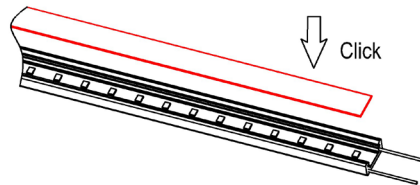


6. Remove the below parts with tool

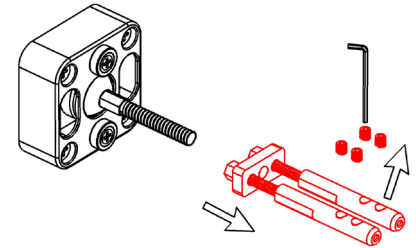


7. Insert the wire rope & lock it tightly

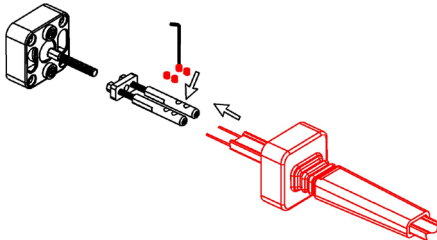


8. Adjust the length of TPV with tool



9. Connect the wires with terminals

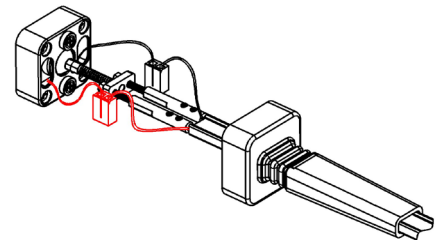

10. Insert the terminals in the canopy

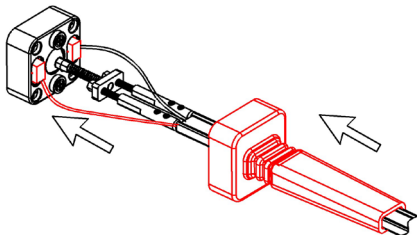

11. Installation completed .

