




# QUE

## TRACK LIGHT SYSTEM

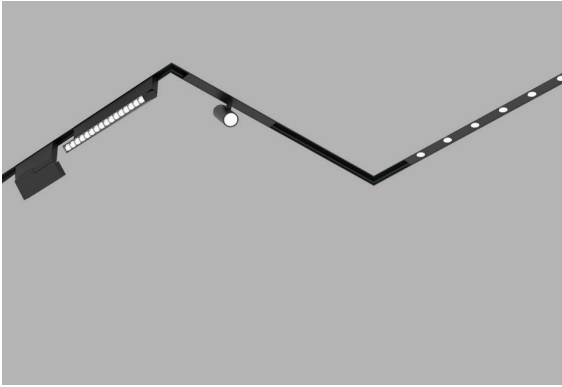

The Que Track series presents a collection of track lights that redefine versatility and elegance in lighting solutions. This series offers multiple track types and a wide range of track head, ensuring compatibility with various room styles and configurations. With its sleek design, the Que Track series seamlessly integrates into any space, delivering a modern and sophisticated aesthetic. Its strong features lie in its adaptability, allowing for effortless customization to suit individual preferences. Whether you require a contemporary or traditional ambiance, the Que Track series provides exceptional lighting options that combine functionality with style.

### FEATURES

- Various Interchangeable Light Heads Magnetic connection
- Surface, Recessed, Trimless and Pendant application options
- Unlimited finish options
- Seamless link capability
- Maximum 300W connected load per power connection
- Ultra thin silhouette
- 5 Year warranty

### PROFILES



Surface



Mud-In Trimless




Non-Mud-In Trimless



Pendant

### TRACK HEADS





# QUE

## TRACK LIGHT SYSTEM

### TRACK ORDERING GUIDE

Que - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ *Example: Que-SF-6-BK*

Model	Track	Length	Finish
Que	<b>SF</b> Surface	<b>6</b> 6FT	<b>BK</b> Black
	<b>TM</b> Trimless Mud-In	<b>9</b> 9.8FT	<b>WT</b> White
	<b>TN</b> Trimless Non-Mud-In	<b>L</b> L shape	<b>CP</b> Copper
	<b>P</b> Pendant	<b>IL</b> Inner L shape	<b>GD</b> Gold
			<b>BN</b> Brushed Nickel

### ACCESSORY ORDERING GUIDE

Que- \_\_\_\_\_ - \_\_\_\_\_ *Example: Que-HLC-BK*

Model	Type	Finish
Que	<b>HLC</b> Hard L connector	<b>BK</b> Black
	<b>FLC</b> Flexible L connector	<b>WT</b> White
	<b>SW</b> Starting Wire	<b>CP</b> Copper
	<b>HC</b> Hard Connector	<b>GD</b> Gold
		<b>BN</b> Brushed Nickel

*\* Accessories are compatible with all 4 track types*



# QUE

## TRACK LIGHT SYSTEM


### SURFACE MOUNT TRACK



### FEATURES

- Unlimited Finish Options
- Seamless link capability
- Maximum 300W connected load per power connection
- Surface or Recessed mount
- Flat L or Inside L shape available
- 6 and 9.6ft lengths

### DIMENSIONS



### ACCESSORIES




Starting Wire



L Shape Track



Inner L Shape Track

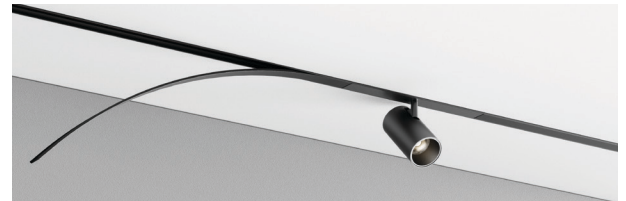

Track Cover (Included with Track)



Hard L Connector



Flexible L connector




Hard connector



# QUE

## TRACK LIGHT SYSTEM


### TRIMLESS MOUNT MUD-IN TRACK



### FEATURES

- Unlimited Finish Options
- Seamless link capability
- Maximum 300W connected load per power connection
- Plaster-in recessed mount
- Flat L or Inside L shape available
- 6 and 9.6ft lengths

### DIMENSIONS

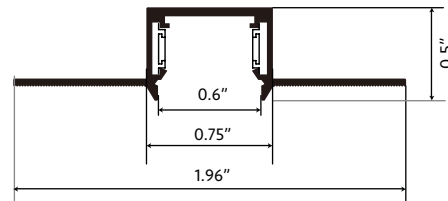

### ACCESSORIES



Starting Wire



L Shape Track



Inner L Shape Track



Track Cover (Included with Track)



Hard L Connector



Flexible L connector



Hard connector



# QUE

## TRACK LIGHT SYSTEM


### TRIMLESS MOUNT NON-MUD-IN TRACK



### FEATURES

- Unlimited Finish Options
- Seamless link capability
- Maximum 300W connected load per power connection
- Non-plaster-in recessed mount
- Flat L or Inside L shape available
- 6 and 9.6ft lengths

### DIMENSIONS

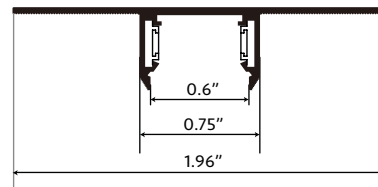

### ACCESSORIES



Starting Wire



L Shape Track



Inner L Shape Track



Track Cover (Included with Track)



Hard L Connector



Flexible L connector



Hard connector



# QUE

## TRACK LIGHT SYSTEM


### PENDANT MOUNT TRACK



### FEATURES

- Unlimited Finish Options
- Seamless link capability
- Maximum 300W connected load per power connection
- Pendant Mount
- Flat L or Inside L shape available
- 6 and 9.6ft lengths
- 5ft adjustable suspension wire

### DIMENSIONS



### ACCESSORIES



Starting Wire




L Shape Track



Inner L Shape Track



Hard connector

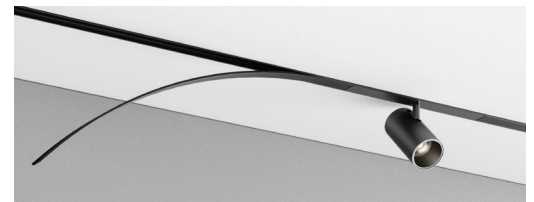


Track Cover (Included with Track)




# QUE

## TRACK LIGHT SYSTEM

### DRIVERS

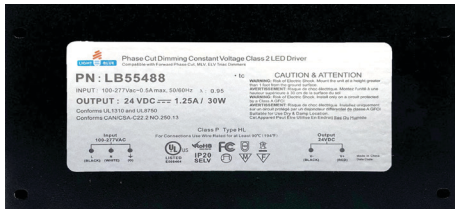

Model LB55488  
 Wattage 30W  
 Dimensions 6.5" x 3.6" x 1.02"  
 Temperature IP20  
 Dimming Triac

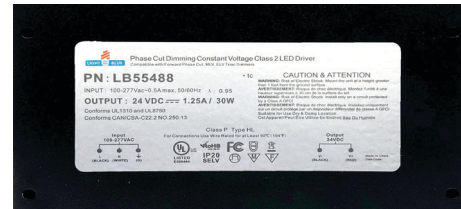


Model LB55470  
 Wattage 120W  
 Dimensions 8.66" x 3.6" x 1.61"  
 Temperature IP20  
 Dimming Triac




Model LB55489  
 Wattage 60W  
 Dimensions 7.4" x 3.6" x 1.02"  
 Temperature IP20  
 Dimming Triac



Model LB55471  
 Wattage 200W  
 Dimensions 10.23" x 4.05" x 1.81"  
 Temperature IP20  
 Dimming Triac

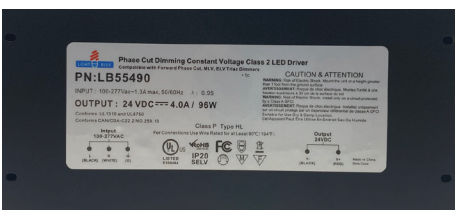

Model LB55490  
 Wattage 96W  
 Dimensions 8.66" x 3.6" x 1.61"  
 Temperature IP20  
 Dimming Triac

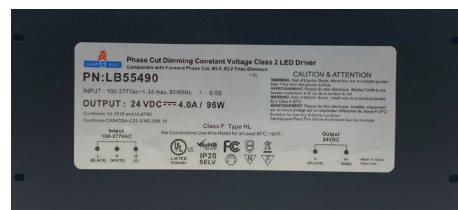

Model LB55472  
 Wattage 300W  
 Dimensions 10.94" x 4.25" x 1.81"  
 Temperature IP20  
 Dimming Triac





# QUE

## TRACK LIGHT SYSTEM






### SPECIFICATIONS

Power	3W/5W/7W/10W	Material	Aluminum
Input Voltage	24V	Finish	Sand black/White
CRI	≥90	Dimming	Triac Dimming (Using Triac Dimming Driver)
Temperature	2700K/3000K/3500K/4000K	IP Rating	IP20
Beam Angle	24°/36°/ 45°	Warranty	5 Years
Lumens	270LM/450LM/630LM/900LM		

### ORDERING GUIDE

Que14 - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ **Example: Que14-3-27-24-BK**

Model	Power	CCT	Beam Angle	Finish
Que 14	<b>3</b> 3W	<b>27</b> 2700K	<b>24</b> 24°	<b>BK</b> Black
	<b>5</b> 5W	<b>30</b> 3000K	<b>36</b> 36°	<b>WT</b> White
	<b>7</b> 7W	<b>35</b> 3500K	<b>45</b> 45°	
	<b>10</b> 10W	<b>40</b> 4000K		







# QUE

## TRACK LIGHT SYSTEM





### SPECIFICATIONS

Power	3W*2/5W*2/10W*2	Material	Aluminum
Input Voltage	24V	Finish	Sand black/White/Gold
CRI	≥90	Dimming	Triac Dimming (Using Triac Dimming Driver)
Temperature	2700K/3000K/3500K/4000K	IP Rating	IP20
Beam Angle	24°/36°	Warranty	5 Years
Lumens	540LM/900LM/1800LM		

### ORDERING GUIDE

Que11 - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ **Example: Que11 -3-27-24-BK**

Model	Power	CCT	Beam Angle	Finish
Que 11	<b>3</b> 3W	<b>27</b> 2700K	<b>24</b> 24°	<b>BK</b> Black
	<b>5</b> 5W	<b>30</b> 3000K	<b>36</b> 36°	<b>WT</b> White
	<b>10</b> 10W	<b>35</b> 3500K		<b>GD</b> Gold
		<b>40</b> 4000K		

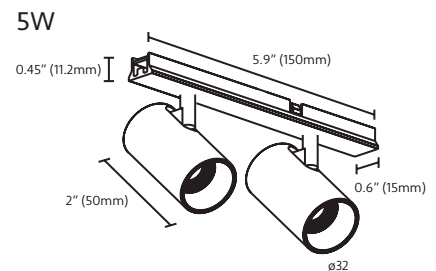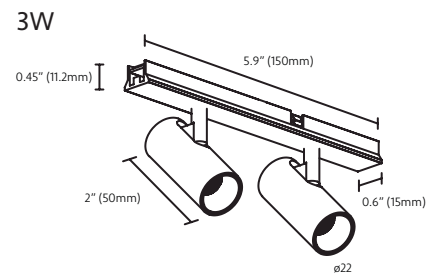



# QUE

## TRACK LIGHT SYSTEM



### SPECIFICATIONS


Power	6W/12W	Material	Aluminum
Input Voltage	24V	Finish	Sand black/White
CRI	≥90	Dimming	Triac Dimming (Using Triac Dimming Driver)
Temperature	2700K/3000K/3500K/4000K	IP Rating	IP20
Beam Angle	36° / 45°	Warranty	5 Years
Lumens	330LM/660LM		

### ORDERING GUIDE


Que13 - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ **Example: Que13-6-27-36-BK**

Model	Power	CCT	Beam Angle	Finish
Que 13	<b>6</b> 6W	<b>27</b> 2700K	<b>36</b> 36°	<b>BK</b> Black
	<b>12</b> 12W	<b>30</b> 3000K	<b>45</b> 45°	<b>WT</b> White
		<b>35</b> 3500K		
		<b>40</b> 4000K		

6W

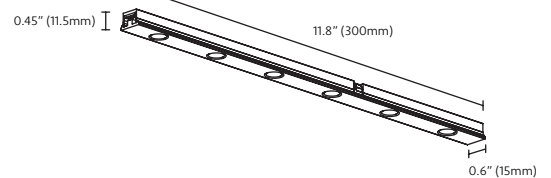

12W

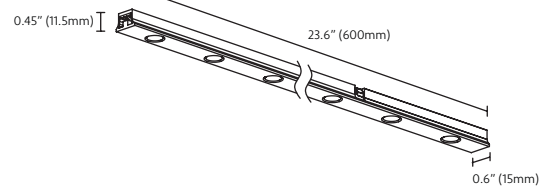



# QUE

## TRACK LIGHT SYSTEM



### SPECIFICATIONS


Power	6W/12W	Material	Aluminum
Input Voltage	24V	Finish	Sand black/White
CRI	≥90	Dimming	Triac Dimming (Using Triac Dimming Driver)
Temperature	2700K/3000K/3500K/4000K	IP Rating	IP20
Beam Angle	110°	Warranty	5 Years
Lumens	180LM/360LM		

### ORDERING GUIDE


Que12 - \_\_\_\_\_ - \_\_\_\_\_ - 110 - \_\_\_\_\_ *Example: Que12-6-27-110-BK*

Model	Power	CCT	Beam Angle	Finish
Que 12	<b>6</b> 6W	<b>27</b> 2700K	110°	<b>BK</b> Black
	<b>12</b> 12W	<b>30</b> 3000K		<b>WT</b> White
		<b>35</b> 3500K		
		<b>40</b> 4000K		

6W

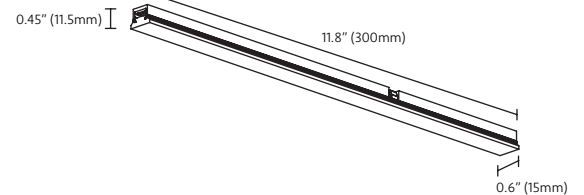

12W

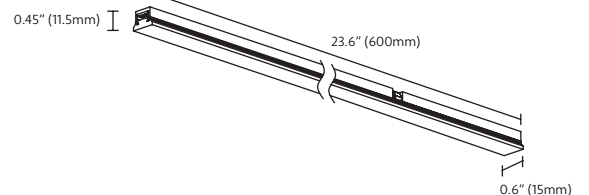



# QUE

## TRACK LIGHT SYSTEM





### SPECIFICATIONS

Power	6W/12W	Lens	Anti-Glare
Input Voltage	24V	Material	Aluminum AL6063
CRI	≥90	Finish	Sand black/ White
Temperature	2700K/3000K/3500K/4000K	Dimming	Triac Dimming (Using Triac Dimming Driver)
Beam Angle	36°/45°	IP Rating	IP20
Lumens	408LM/816LM	Warranty	5 Years

### ORDERING GUIDE

Que10 - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ **Example: Que10-6-27-36-BK**


Model	Power	CCT	Beam Angle	Finish
Que 10	<b>6</b> 6W	<b>27</b> 2700K	<b>36</b> 36°	<b>BK</b> Black
	<b>12</b> 12W	<b>30</b> 3000K	<b>45</b> 45°	<b>WT</b> White
		<b>35</b> 3500K		
		<b>40</b> 4000K		

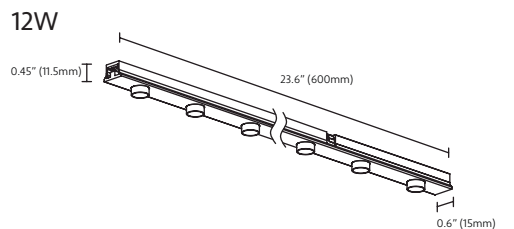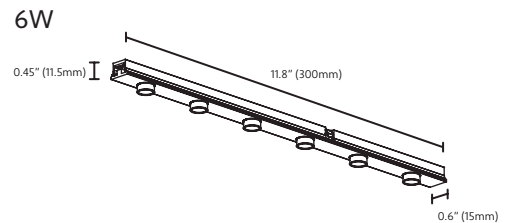



# QUE

## TRACK LIGHT SYSTEM

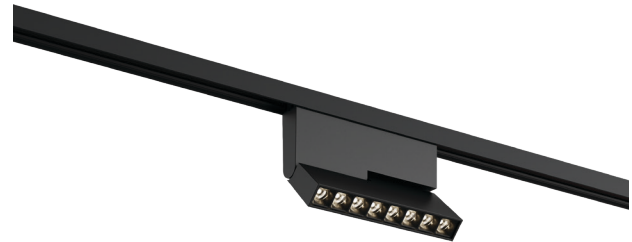

### SPECIFICATIONS


Power	8W/16W	Lens	Anti-Glare
Input Voltage	24V	Material	Aluminum
CRI	90	Finish	Black/White
Temperature	2700K/3000K/3500K/4000K	Dimming	Triac Dimming (Using Triac Dimming Driver)
Beam Angle	24°/36°/ 45°	IP Rating	IP20
Lumens	640LM/1280LM	Warranty	5 Years

### ORDERING GUIDE


Que16 - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ *Example: Que16-8-27-24-BK*

Model	Power	CCT	Beam Angle	Finish
Que 16	<b>8</b> 8W	<b>27</b> 2700K	<b>24</b> 24°	<b>BK</b> Black
	<b>16</b> 16W	<b>30</b> 3000K	<b>36</b> 36°	<b>WT</b> White
		<b>35</b> 3500K	<b>45</b> 45°	
		<b>40</b> 4000K		

8W



16W

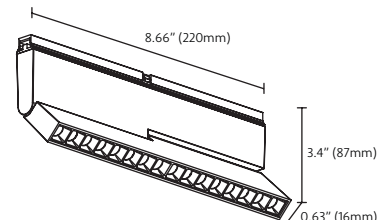



# QUE

## TRACK LIGHT SYSTEM



### SPECIFICATIONS


Power	8W/16W	Lens	Anti-Glare
Input Voltage	24V	Material	Aluminum
CRI	90	Finish	Black/White
Temperature	2700K/3000K/3500K/4000K	Dimming	Triac Dimming (Using Triac Dimming Driver)
Beam Angle	24°/45°	IP Rating	IP20
Lumens	640LM/1280LM	Warranty	5 Years

### ORDERING GUIDE


Que17 - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ **Example: Que17-8-27-24-BK**

Model	Power	CCT	Beam Angle	Finish
Que 17	<b>8</b> 8W	<b>27</b> 2700K	<b>24</b> 24°	<b>BK</b> Black
	<b>16</b> 16W	<b>30</b> 3000K	<b>45</b> 45°	<b>WT</b> White
		<b>35</b> 3500K		
		<b>40</b> 4000K		

8W

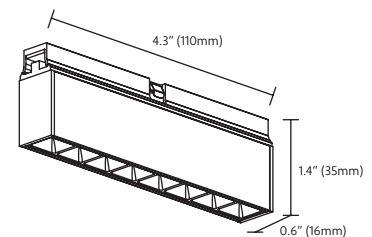

16W

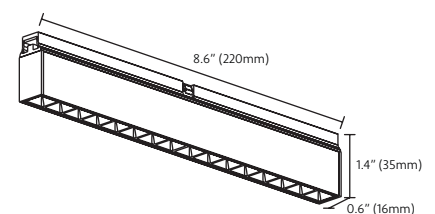



# QUE

## TRACK LIGHT SYSTEM




### SPECIFICATIONS

Power	8W	Cord Length	220mm
Input Voltage	24V	Material	Aluminum
Lumens	425LM	Finish	Blake/White
CRI	≥90	Dimming	Triac Dimming (Using Traic Dimming Driver)
Temperature	2700K/3000K/3500K/4000K	Rating	IP20
Beam Angle	15°/24°/45°	Warranty	5 Years

### ORDERING GUIDE

Que 15 - 8 - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ *Example: Que15-8-27-15-BK*

Model	Power	CCT	Beam Angle	Finish
Que 15	<b>8</b> 8W	<b>27</b> 2700K	<b>15</b> 15°	<b>BK</b> Black
		<b>30</b> 3000K	<b>24</b> 24°	<b>WT</b> White
		<b>35</b> 3500K	<b>45</b> 45°	
		<b>40</b> 4000K		







# QUE

## TRACK LIGHT SYSTEM



### SPECIFICATIONS


Power	6W	Material	Aluminum
Input Voltage	24V	Finish	Black/White
CRI	90	Dimming	Triac Dimming (Using Traic Dimming Driver)
Temperature	2700K/3000K/3500K/4000K	IP Rating	IP20
Beam Angle	24°/40°	Warranty	5 Years
Lumens	352LM		

### ORDERING GUIDE

Que18 - 6 - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ *Example: Que18-6-27-24-BK*

Model	Power	CCT	Beam Angle	Finish
Que 18	<b>6</b> 6W	<b>27</b> 2700K	<b>24</b> 24°	<b>BK</b> Black
		<b>30</b> 3000K	<b>40</b> 40°	<b>WT</b> White
		<b>35</b> 3500K		
		<b>40</b> 4000K		

6W





# QUE

## TRACK LIGHT SYSTEM




### SPECIFICATIONS

Power	5W	Material	Aluminum
Input Voltage	24V	Finish	Black/White
CRI	90	Dimming	Triac Dimming (Using Triac Dimming Driver)
Temperature	2700K/3000K/3500K/4000K	IP Rating	IP20
Beam Angle	330°	Warranty	5 Years
Lumens	506LM		

### ORDERING GUIDE

Que19 - 5 - \_\_\_\_\_ - 330 - \_\_\_\_\_ *Example: Que19-5-27-330-BK*

Model	Power	CCT	Beam Angle	Finish
Que 19	5 5W	<b>27</b> 2700K	330°	<b>BK</b> Black <b>WT</b> White
		<b>30</b> 3000K		
		<b>35</b> 3500K		
		<b>40</b> 4000K		

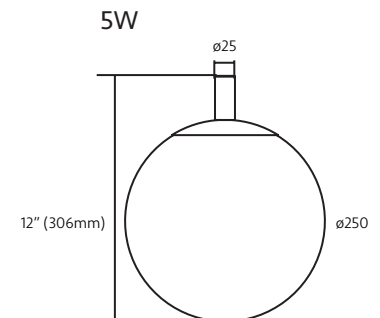



# QUE

## TRACK LIGHT SYSTEM



### SPECIFICATIONS

Power	3W	Material	Aluminum
Input Voltage	24V	Finish	Sand black/White
CRI	≥90	Dimming	Triac Dimming (Using Triac Dimming Driver)
Temperature	2700K/3000K/3500K/4000K	IP Rating	IP20
Beam Angle	360°	Warranty	5 Years
Lumens	220LM		

### ORDERING GUIDE

Que20 - \_\_\_\_ -3- \_\_\_\_ - 360 - \_\_\_\_

*Example: Que20-F-3-27-360-BK*

Model	Mounting	Power	CCT	Beam Angle	Finish
Que 20	<b>F</b> Flush <b>P</b> Pendant	3W	<b>27</b> 2700K	360°	<b>BK</b> Black <b>WT</b> White
			<b>30</b> 3000K		
			<b>35</b> 3500K		
			<b>40</b> 4000K		

3W

