



METRO


LINKABLE LINEAR

LINEAR SERIES



SPECIFICATIONS

Max Run	400W
Lumens	85lm/W
Driver Efficacy	>87%
Power Factor	>0.95
Color Temperature	3000K, 4000K, 6000K
Application	Suspended
Dimming	Non-Dimmable/ 0-10V
CRI	83
Down Beam Angle	104°
THD	<20%
Lifetime	50,000 hrs.
Environment	IP20
Certification	ETL/CETL
Dimensions	0.78W x 3.7H
Warranty	5 Years
Distribution	Direct 75% Indirect 25%

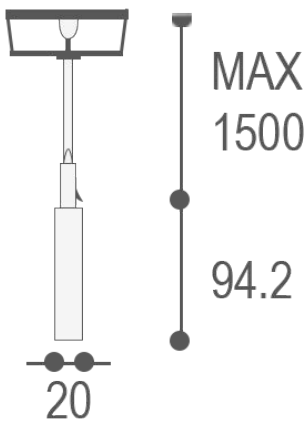

FEATURES

- Suspended Ceiling Mount
- Direct or Direct/Indirect Lighting option
- Seamlessly linkable
- Multiple finishes available, including custom finishes
- Extruded Aluminum Housing
- 5 Year Warranty

ORDERING GUIDE

MTO -	- UNV -	-	-	-	Example: METRO-2-UNV-D-30K-010-BK					
Model	Length	Wattage	Lumens	Voltage	Direction		Color Temp.		Dimming	Finish
METRO	2FT	25W	2125lm	100-277V	D	Direct	30K	3000K	Non Dimmable (Leave Blank) 0-10V	BK Black
	3FT	30W	2550lm		DI	Direct/ Indirect	40K	4000K		WT White
	4FT	34W	2890lm							BN Brushed
	5FT	40W	3400lm							Nickel
	L									CC Custom
	T									
V										
X										
Y										

*The Metro Linear is made to order - Inquire for expedited lead time

*MAX RUN IS 400W



METRO LINKABLE LINEAR

LINEAR SERIES




Black



White



Brushed Nickel



Custom

FINISH OPTIONS

Black	WT
Brushed Nickel	BN
White	BK
Custom	CC

The Metro Linear series offers four finish options: black, brushed nickel, white, and custom. Black is a timeless option that blends into any space, while brushed nickel adds sophistication and elegance. White is clean and simple, and works well with minimalist and contemporary designs. Custom finishes allow customers to choose their own color or look for their fixtures. With these options, customers can select the perfect finish to complement their space and style.



METRO LINKABLE LINEAR

LINEAR SERIES

LINKABLE ACCESSORIES

Seamless continuous connections, X, L, T, V, Y modules available

