PROJECT: PREPARED BY: TYPE:

INV
INOVA CEILING FIXTURE

RAYHIL X INPUT

FEATURES

- Multiple finish combination capability
- 5 Color temperature options
- 120V or 120-277V Driver Option
- Anti-Glare Lens Available
- Interchangeable color trims
- Designed by Input

SPECIFICATIONS

Diameter	9”/12”/16”/20”
Height	2 .375”H
Lumens	80LM/W
Color Temperature	27K, 30K, 35K, 40K /5CCT Selectable
CRI	80
Light Source	Integrated LED
Dimming	Triac/0-10V
Environment	Damp
Base	Black/White
Rim	Black/White/Brass/Wood
Body Material	Aluminum
Lens Material	Acrylic
Mounting	Surface Mounted Flush
Diffuser	Anti-Glare Diffuser/Frosted Diffuser
Certifications	ETL

ORDERING GUIDE

INV - - CCT - UNV - - - - ***Example: INV-9-CCT-UNV-BK-BK-F-SF***

Model	Diameter	Wattage	Lumens (Delivered)	Color Temp.	Voltage
INV	**9** 9in **12** 12in **16** 16in **20** 20in	15W 18W 26W 32W	1200LM 1440LM) 2080LM 2560LM	**CCT** 27K/30K/35K/40K/50K Selectable	**UNV** 120-277V (Traic/0-10V Dimming) **9”/12“ 120V ONLY**

Base	Rim	Lens	Mounting
BK Black **WT** White **CS** Custom	**BK** Black **WT** White **BR** Brass **WD** Wood **CS** Custom	**F** Frosted **AG** Anti-Glare	**SF** Surface **ST** Stem (4 inch)

** Contact for custom requirement*

INV

INOVA CEILING FIXTURE

RAYHIL X INPUT

FINISH

White Base

White rim

Black rim

Brass rim

Wood rim

Black Base

White rim

Black rim

Brass rim

Wood rim

Custom Finish

Custom finish requests are available for both Base and Trim

INV

INOVA CEILING FIXTURE

RAYHIL X INPUT

LENS

Frosted

A smooth acrylic diffuser that softens the light output for a clean, even glow

Anti-Glare

Engineered to minimize direct glare, this lens delivers comfortable, glare-free illumination ideal for overhead application

PROJECT: PREPARED BY: TYPE:

INV
INOVA CEILING FIXTURE

RAYHIL X INPUT

DIMENSIONS

9inch

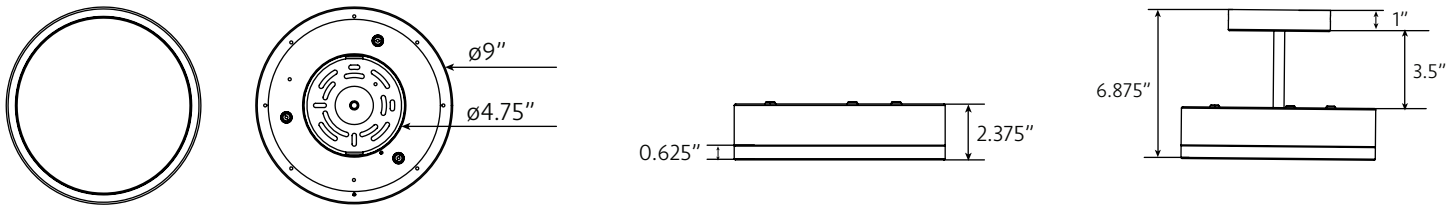

12inch

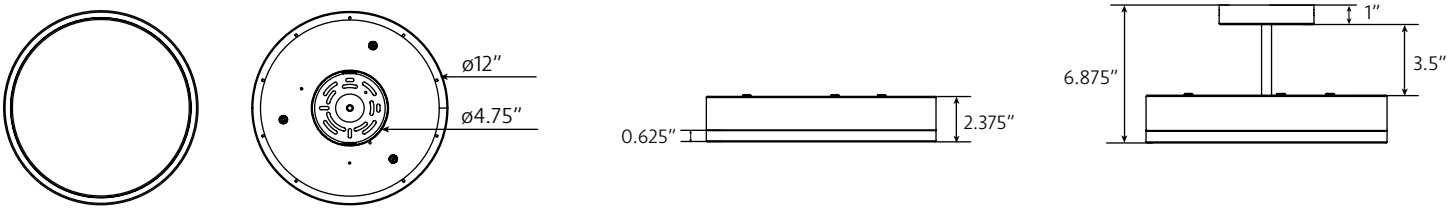

16inch

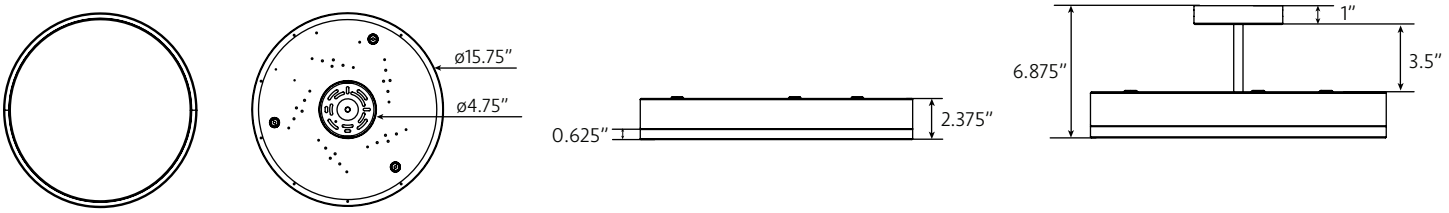

20inch