



INOVA CEILING FIXTURE

RAYHIL X INPUT



FEATURES

- Multiple finish combination capability
- 5 Color temperature options
- 120V or 120-277V Driver Option
- Anti-Glare Lens Available
- Interchangeable color trims
- Designed by Input

SPECIFICATIONS

Diameter	9"/12"/16"/20"	Base	Black/White
Height	2.375"H	Rim	Black/White/Brass/Wood
Lumens	80LM/W	Body Material	Aluminum
Color Temperature	27K, 30K, 35K, 40K /5CCT Selectable	Lens Material	Acrylic
CRI	80	Mounting	Surface Mounted Flush
Light Source	Integrated LED	Diffuser	Anti-Glare Diffuser/Frosted Diffuser
Dimming	Triac/0-10V	Certifications	ETL, UL
Environment	Damp		

ORDERING GUIDE

INV - _____ - CCT - UNV - _____ - _____ - SF *Example: INV-9-CCT-UNV-BK-BK-F-SF*

Model	Diameter	Wattage	Lumens (Delivered)	Color Temp.	Voltage
INV	9 9in 12 12in 16 16in 20 20in	15W 18W 26W 32W	1200LM 1440LM 2080LM 2560LM	CCT 27K/30K/35K/40K/50K Selectable	UNV 120-277V (Triac/0-10V Dimming) *9"/12" 120V ONLY*
Base	Rim	Lens	Mounting		
BK Black WT White CS Custom	BK Black WT White BR Brass WD Wood CS Custom	F Frosted AG Anti-Glare	SF Surface		

* Contact for custom requirement

PROJECT:

PREPARED BY:

TYPE:



INOVA CEILING FIXTURE

INV

RAYHIL X INPUT

FINISH

White Base



White rim



Black rim



Brass rim



Wood rim

Black Base



White rim



Black rim



Brass rim



Wood rim

Custom Finish

Custom finish requests are available for both Base and Trim



INOVA CEILING FIXTURE

INV

RAYHIL X INPUT

LENS



Frosted

A smooth acrylic diffuser that softens the light output for a clean, even glow



Anti-Glare

Engineered to minimize direct glare, this lens delivers comfortable, glare-free illumination ideal for overhead application

PROJECT:

PREPARED BY:

TYPE:




INOVA CEILING FIXTURE


RAYHIL X INPUT

DIMENSIONS


9inch

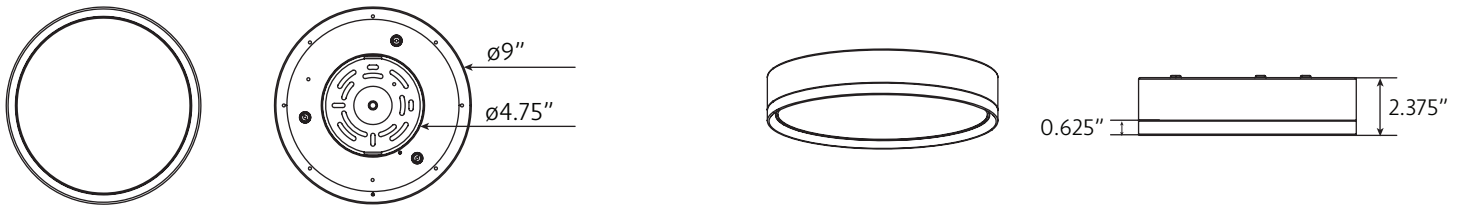

12inch

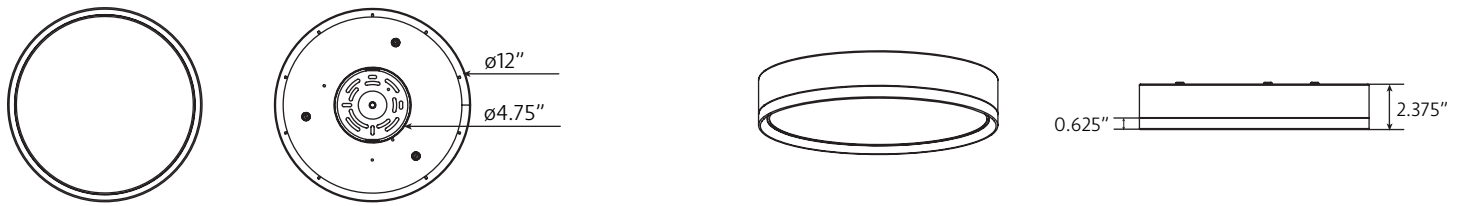

16inch

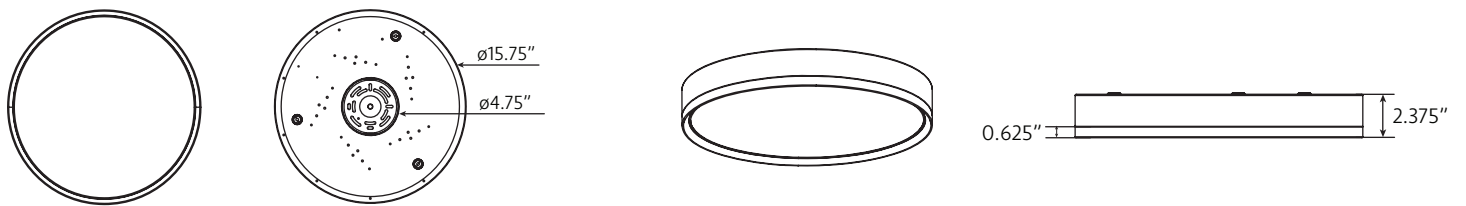

20inch

