



INFUSE SERIES PENDANT CYLINDER SQUARE

RAYHIL X INPUT



FEATURES

- Universal Voltage
- Triac and 0-10 Dimming
- Multiple Finish combinations
- Wattage and CCT Selectable
- Interchangeable components
- Designed by Input

SPECIFICATIONS

Wattage	6W/9W/12W Selectable
Lumens	80LM/W
Color Temperature	2700K/3000K/3500K/4000K/5000K
CRI	80
Dimming	Triac/0-10V
Light Source	Integrated LED
Voltage	UNV 110-277
Base	Black/White
Trim	Black/White/Brass/Wood
Environment	Damp
Certification	ETL/ES
Dimension	4.5"W x 22.5"H x 2.125"D
Material	Aluminum
Application	Pendant

ORDERING GUIDE

INFP - SQ - CCT - _____ - _____ - _____ - _____

Example: INFP-SQ-CCT-BK-BK-CD-RD

Model	Shape	Wattage	Lumens (Delivered)	CCT
INFP	SQ Square	6W/9W/12W Selectable	480LM/720LM/960LM	CCT 27K/30K/35/40K/50K Selectable
Base	Trim	Pendant	Canopy	
BK Black	BK Black	CD Cord	RD Round	
WT White	WT White	ST Stem	SQ Square	
CS Custom (Contact for requirements)	BR Brass	ST Stem Mount Ultra (Intervals of 6" or 12")		
	WD Wood			
	CS Custom (Contact for requirements)			



INFUSE SERIES PENDANT CYLINDER SQUARE

RAYHIL X INPUT

FINISH

White Base



White trim



Black trim



Brass trim



Wood trim

Black Base



White trim



Black trim



Brass trim



Wood trim

Custom Finish

Custom finish requests are available for both Base and Trim




INFUSE SERIES

PENDANT CYLINDER SQUARE

RAYHIL X INPUT

DIMENSIONS

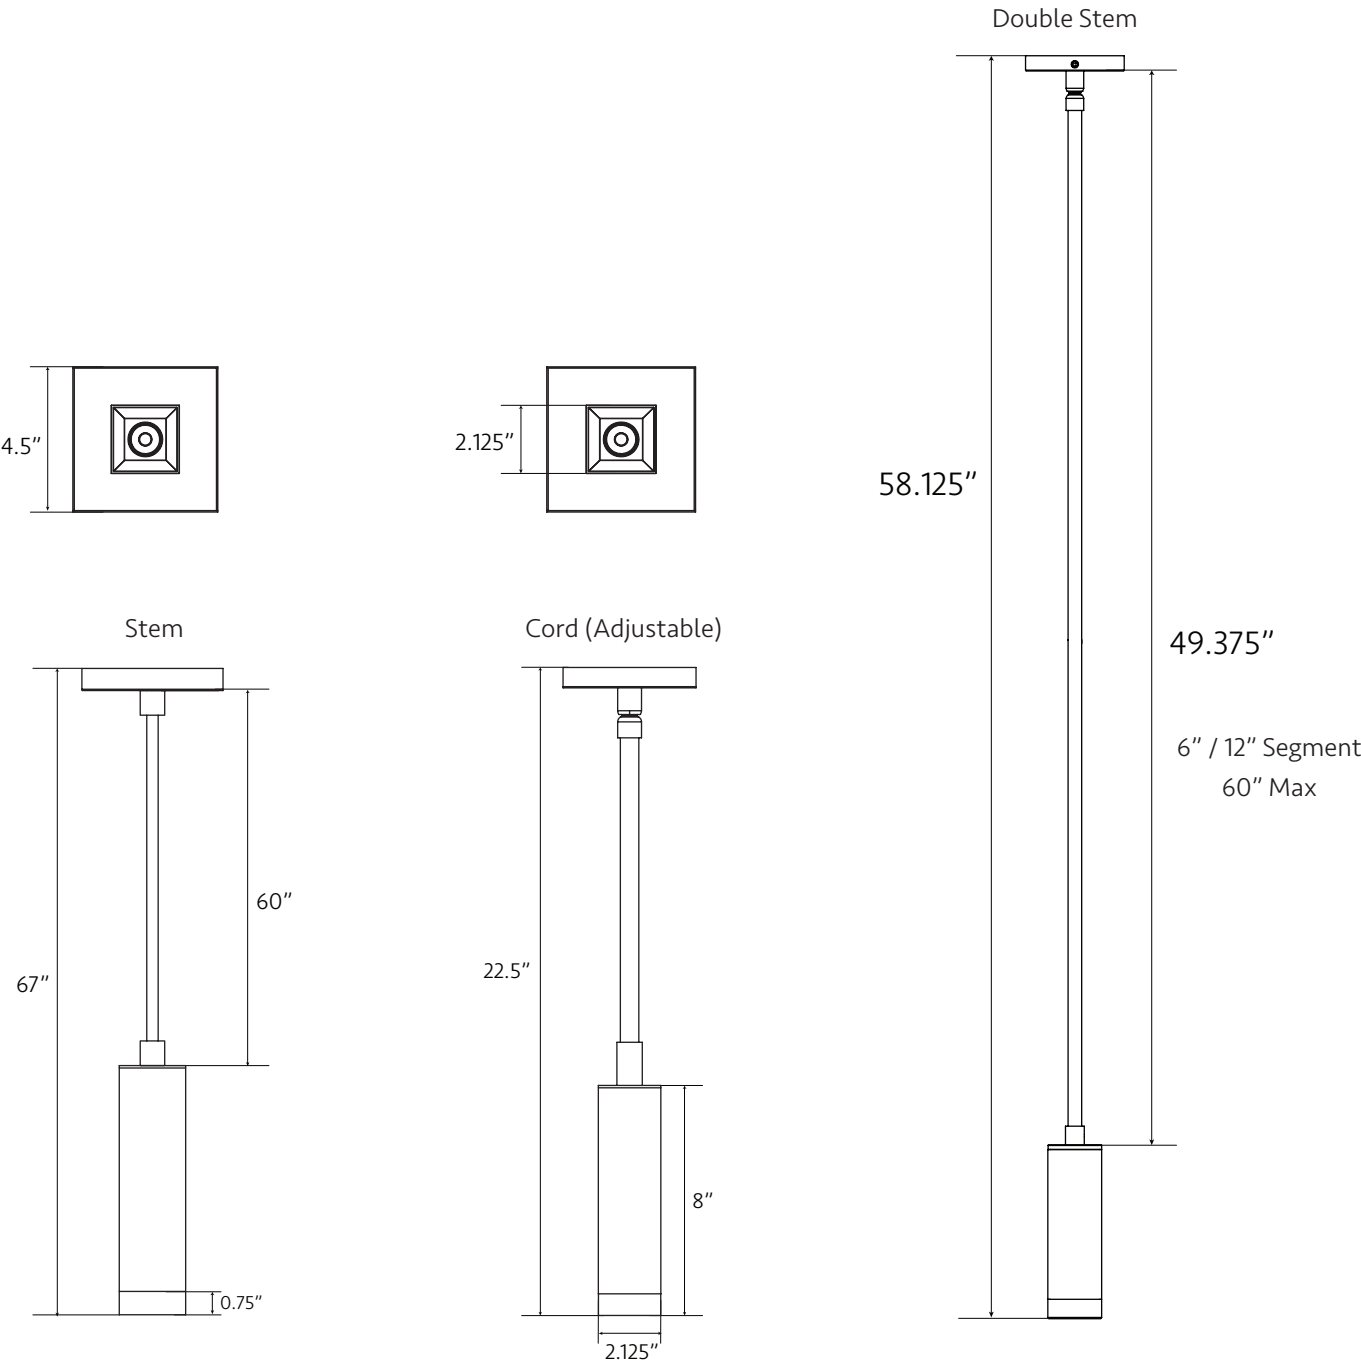



INFUSE SERIES PENDANT CYLINDER SQUARE

RAYHIL X INPUT

Interchangeable Components

