



INFUSE SERIES WALL CYLINDER SQUARE

RAYHIL X INPUT CREATIVE STUDIO




FEATURES

- Universal Voltage
- Triac and 0-10 Dimming
- Multiple Finish combinations
- Wattage and CCT Selectable
- Customized Signage and Braille Options
- Interchangeable components
- Designed by Input Creative Studio

SPECIFICATIONS

Wattage	6W/9W/12W Selectable
Lumens	80LM/W
Color Temperature	2700K/3000K/3500K/4000K/5000K
CRI	80
Dimming	Triac/0-10V
Light Source	Integrated LED
Voltage	UNV 110-277
Base	Black/White
Trim	Black/White/Brass/Wood
Environment	Damp
Certification	ETL/ES
Dimension	5"W x 12.375"H x 2.125"D
Material	Aluminum
Application	Wall Mount

FINISH

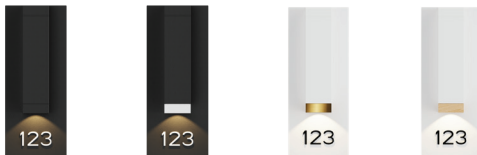

ORDERING GUIDE

INFW - SQ - _____ - _____ - _____ *Example: INFW-27-BK-BK*

Model	Shape	Wattage	Lumens	CCT	Base	Trim	Signage
INFW	Square	6W 9W 12W Selectable	480LM 720LM 960LM	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	BK Black WT White CS Custom (Contact for requirements)	BK Black WT White BR Brass WD Wood CS Custom (Contact for requirements)	Contact for Customized Signage and Braille Options



INFUSE SERIES WALL CYLINDER SQUARE

RAYHIL X INPUT CREATIVE STUDIO

FINISH

White Base



White trim



Black trim



Brass trim



Wood trim

Black Base



White trim



Black trim



Brass trim



Wood trim

Custom Finish


Custom finish requests are available for both Base and Trim



INFUSE SERIES WALL CYLINDER SQUARE

RAYHIL X INPUT CREATIVE STUDIO

DIMENSIONS

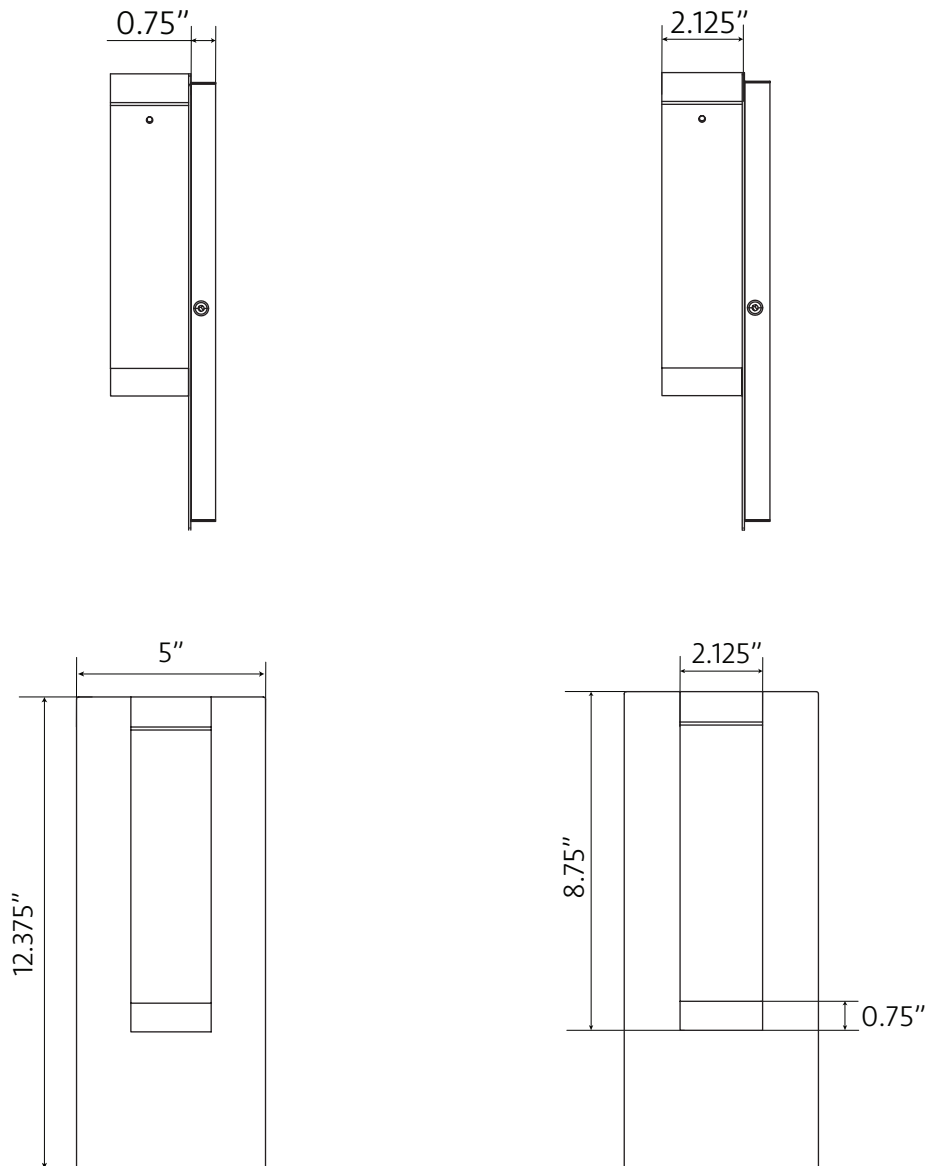



INFUSE SERIES WALL CYLINDER SQUARE

RAYHIL X INPUT CREATIVE STUDIO

Interchangeable Components

