



# F11

## FLORA IN-GROUND

### TERRAIN SERIES



## FEATURES

- Stainless Steel Finish
- Multiple Color Temperature Available
- IK08 Rating
- Multiple Output options

## SPECIFICATIONS

|               |                         |               |                                       |
|---------------|-------------------------|---------------|---------------------------------------|
| Wattage       | 3W/6W/12W/15W           | LED           | CREE COB LED                          |
| Input Voltage | DC24V                   | Housing       | Sold Passivated Aluminum CNC machined |
| CCT           | 2700K/3000K/4000K/6000K | Trim          | Stainless steel                       |
| CRI           | 80+                     | Cut Out       | 2.1"/2.1"/3.9"/3.9"                   |
| Beam Angle    | 15°/23°/38°/45°/60°     | Driver        | Remote Power Supply                   |
| Dimming       | Non-Dimmable            | Accessories   | Mounting sleeve/ Honeycomb            |
| IP Rating     | IP67                    | Warranty      | 5 Years                               |
| IK Rating     | IK09                    | Certification | CE, RoHS                              |

## ORDERING GUIDE

F11 - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ -ST **Example: F11-3-27-15-ST**

| Model | Wattage       | Lumen  | Dimension       | Color Temp.     | Beam Angle    | Finish                    | Optional Accessories    |
|-------|---------------|--------|-----------------|-----------------|---------------|---------------------------|-------------------------|
| F11   | <b>3</b> 3W   | 250LM  | 2.5" D x 2.7" H | <b>27</b> 2700K | <b>15</b> 15° | <b>ST</b> Stainless Steel | Installation Sleeve     |
|       | <b>6</b> 6W   | 500LM  | 2.5" D x 2.7" H | <b>30</b> 3000K | <b>23</b> 23° |                           | Honeycomb               |
|       | <b>12</b> 12W | 1100LM | 4.3" D x 3.3" H | <b>40</b> 4000K | <b>38</b> 38° |                           | (Included with fixture) |
|       | <b>15</b> 15W | 1450LM | 4.3" D x 3.3" H | <b>60</b> 6000K | <b>45</b> 45° |                           |                         |
|       |               |        |                 |                 | <b>60</b> 60° |                           |                         |




F11

FLORA IN-GROUND

TERRAIN SERIES

DIMENSIONS

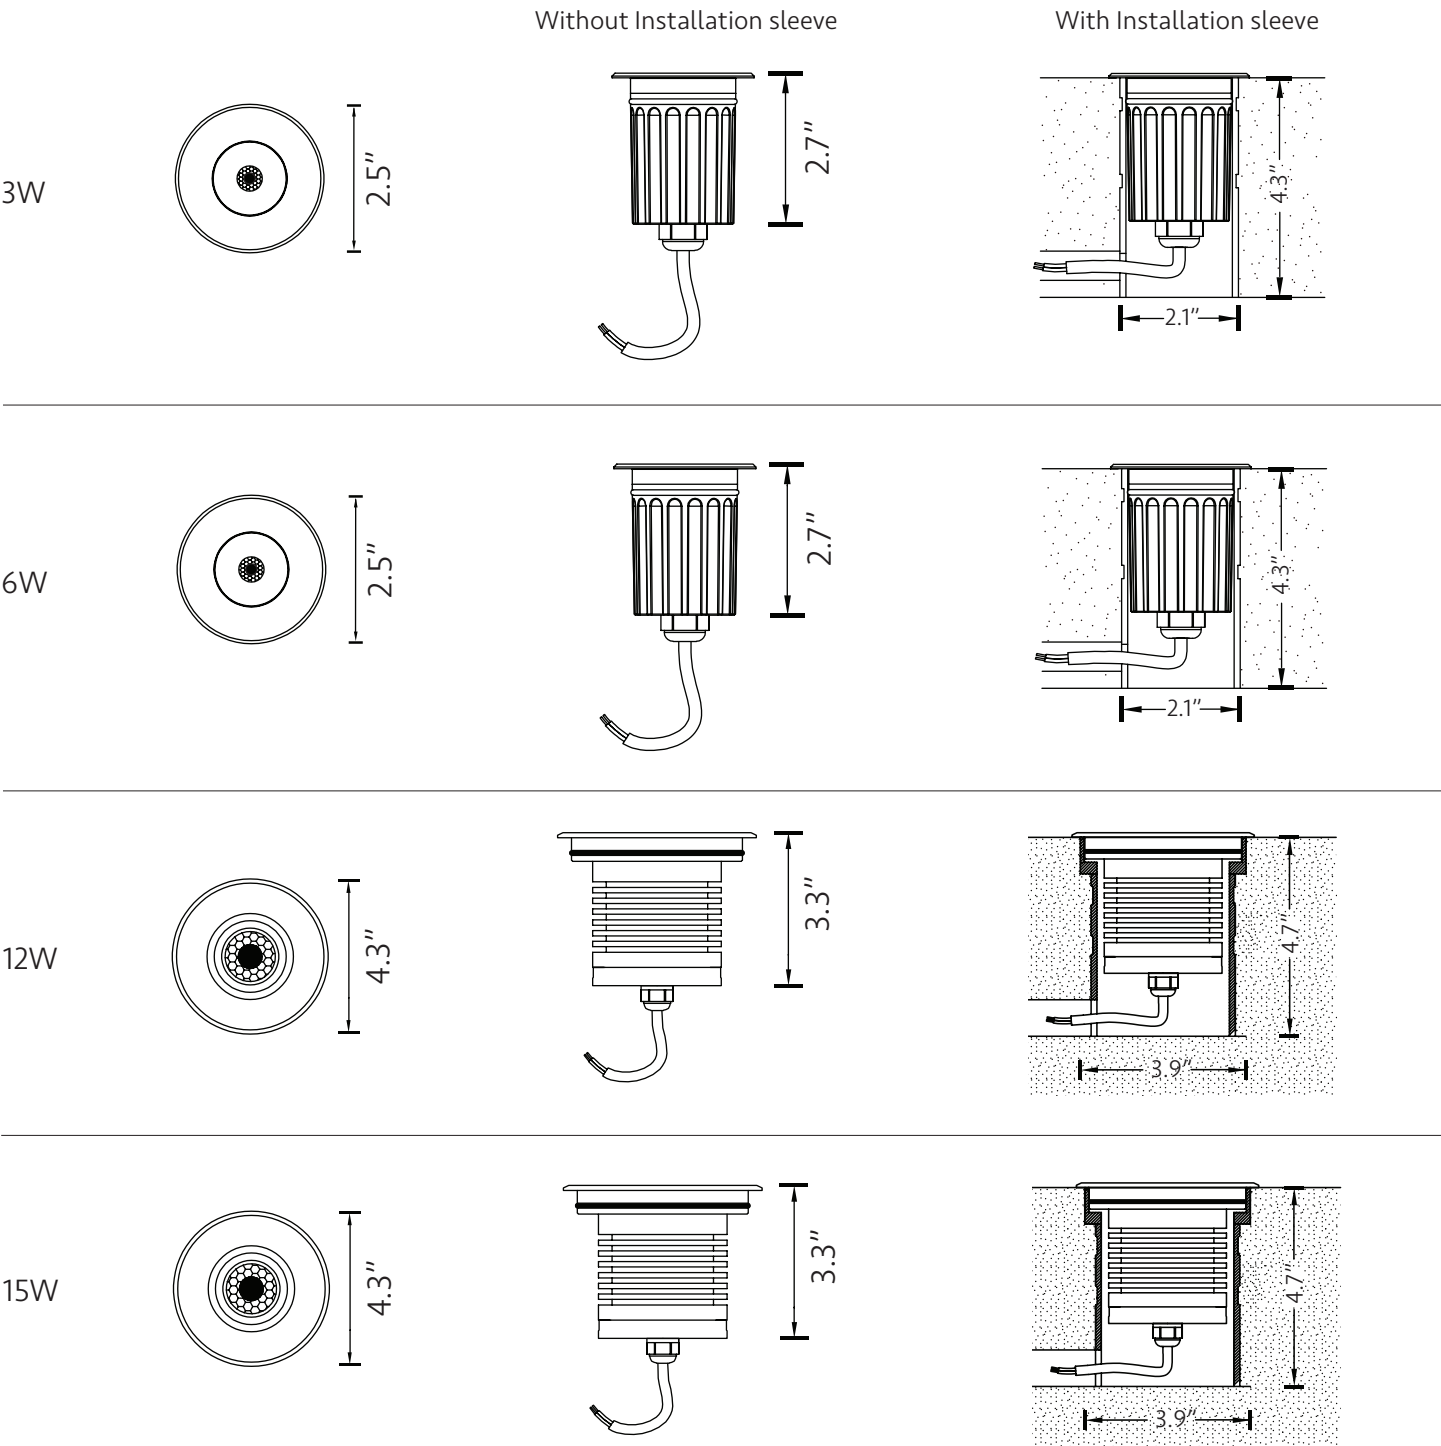





F11

## FLORA IN-GROUND


TERRAIN SERIES

## LIGHT DISTRIBUTION CURVE

6W, 3000K, 36°

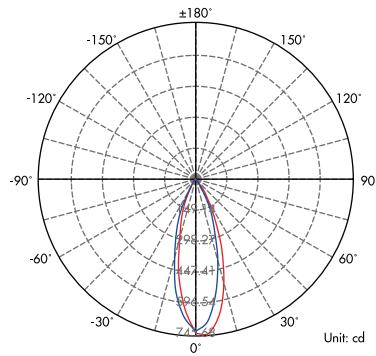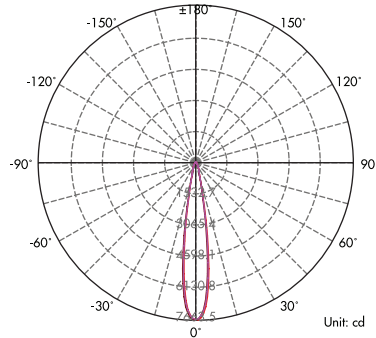12W, 3000K, 10°  
COB Lens

15W, 3000K, 10°

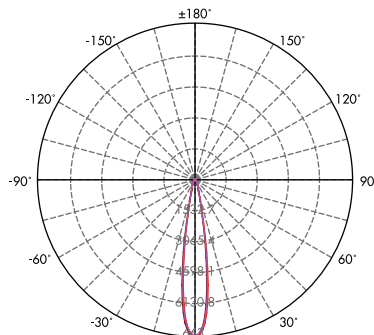



F11

## FLORA IN-GROUND

TERRAIN SERIES

## NON-DIMMABLE DRIVERS



|             |                     |
|-------------|---------------------|
| Model       | LB55504             |
| Wattage     | 60W                 |
| Dimensions  | 7.4" x 3.6" x 1.02" |
| Temperature | IP20                |
| Dimming     | Non-Dimmable        |



|             |                      |
|-------------|----------------------|
| Model       | LB55450              |
| Wattage     | 120W                 |
| Dimensions  | 8.66" x 3.6" x 1.61" |
| Temperature | IP20                 |
| Dimming     | Non-Dimmable         |



|             |                        |
|-------------|------------------------|
| Model       | LB55451                |
| Wattage     | 200W                   |
| Dimensions  | 10.23" x 4.05" x 1.81" |
| Temperature | IP20                   |
| Dimming     | Non-Dimmable           |

*\*Flora Landscape Light Fixture are not compatible with Dimmable Drivers*