


**F12**

FLORA ULTRA SLIM IN-GROUND

TERRAIN SERIES

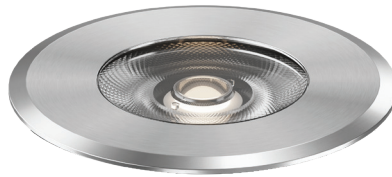

FEATURES

- Ultra Slim depth
- Stainless Steel Trim
- IK08 Rating
- Multiple Beam Angle Available

SPECIFICATIONS

Wattage	6W/9W/12W/15W	LED	CREE COB LED
Lumens	72.5LM/W	Housing	Soild Passivated Aluminum
Input Voltage	DC 24V	Trim	Stainless steel
CCT	2700K/3000K/4000K/6000K	Cut Out	4"
CRI	80+	Dimension	4.3" D x 1.4"L
Beam Angle	10° / 20° / 30°	Driver	Remote Power Supply
Dimming	Non-Dimmable	Accessories	Mounting sleeve, Clip
IP Rating	IP67	Warranty	5 Years
IK Rating	IK08	Certification	CE, RoHS

ORDERING GUIDE

F12 - _____ - _____ - _____ - ST *Example: F12-6-27-10-ST*

Model	Wattage	Lumen	Color Temp.	Optics	Finish	Optional Accessories
F12	6 6W	435LM	27 2700K	10 10°	ST Stainless Steel	Installation Sleeve
	9 9W	652LM	30 3000K	20 20°		Clip
	12 12W	870LM	40 4000K	30 30°		(Included with fixture)
	15 15W	1088LM	60 6000K			






F12


FLORA ULTRA SLIM IN-GROUND

TERRAIN SERIES

DIMENSIONS

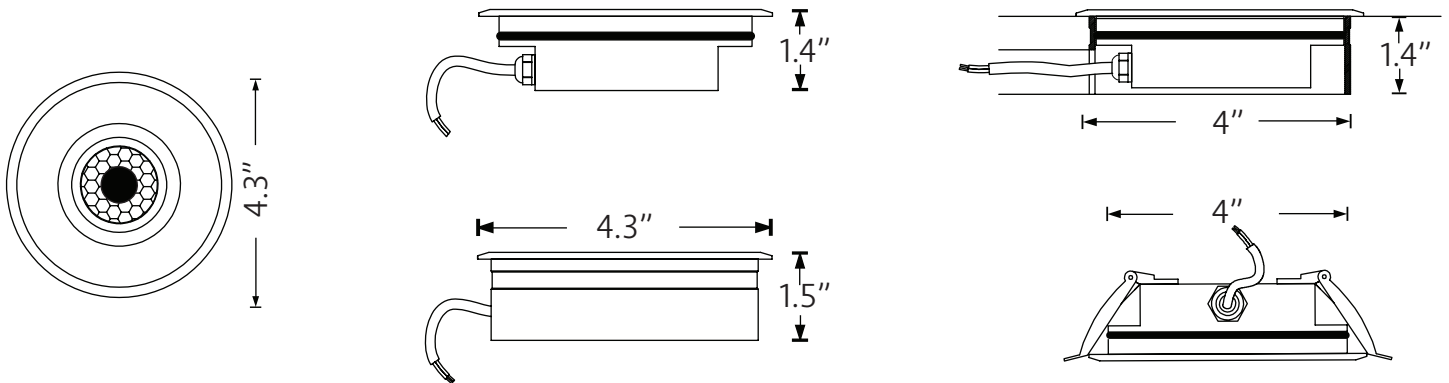

LIGHT DISTRIBUTION CURVE

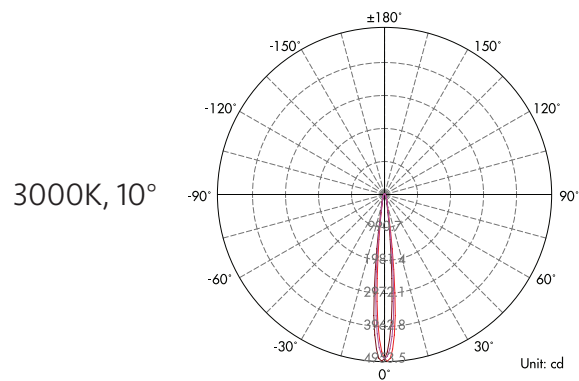



F12

FLORA ULTRA SLIM IN-GROUND

TERRAIN SERIES

NON-DIMMABLE DRIVERS



Model	LB55504
Wattage	60W
Dimensions	7.4" x 3.6" x 1.02"
Temperature	IP20
Dimming	Non-Dimmable



Model	LB55450
Wattage	120W
Dimensions	8.66" x 3.6" x 1.61"
Temperature	IP20
Dimming	Non-Dimmable



Model	LB55451
Wattage	200W
Dimensions	10.23" x 4.05" x 1.81"
Temperature	IP20
Dimming	Non-Dimmable

**Flora Landscape Light Fixture are not compatible with Dimmable Drivers*