




F22

FLORA RECTANGLE IN-WALL

TERRAIN SERIES



FEATURES

- In Wall Application
- Protective Glass Plate
- Wall Wash optics
- Multiple Color Temperature Available

SPECIFICATIONS

Wattage	3W	LED	2835SMD LED
Lumens	160-180LM	Housing	Passivated Aluminum CNC machined
Input Voltage	AC100-245V 50/60Hz	Trim	Black
CCT	2700K/3000K/4000K/6000K	Cut Out	4"L x 2.6"W x 2.1" H
CRI	80+	Dimension	4.1"L x 3.2"W x 1.6" H
Beam Angle	45° x 120°	Driver	Remote Power Supply
Dimming	Non-Dimmable	Accessories	Mounting box
IP Rating	IP65	Warranty	3 Years
IK Rating	IK06	Certification	CE, RoHS

ORDERING GUIDE

F22 - 3 - _____ - WW - BK **Example: F22-3-27-WW-BK**

Model	Wattage	Color Temp.	Optics	Finish	Optional Accessories
F22	3 3W	27 2700K 30 3000K 40 4000K 60 6000K	WW 45° x 120°	BK Black	Mounting box (Included with fixture)

QUICKSHOP OPTION: F22-3-30-WW-BK






F22


FLORA RECTANGLE IN-WALL

TERRAIN SERIES

DIMENSIONS

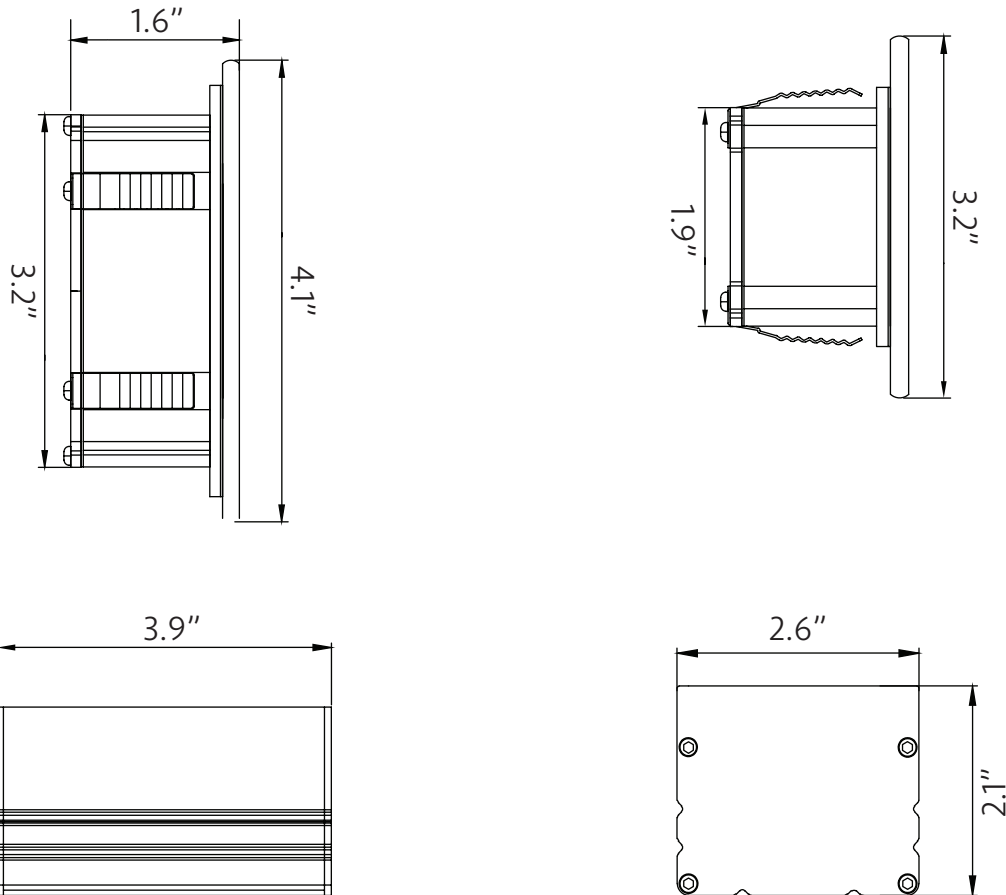

LIGHT DISTRIBUTION CURVE

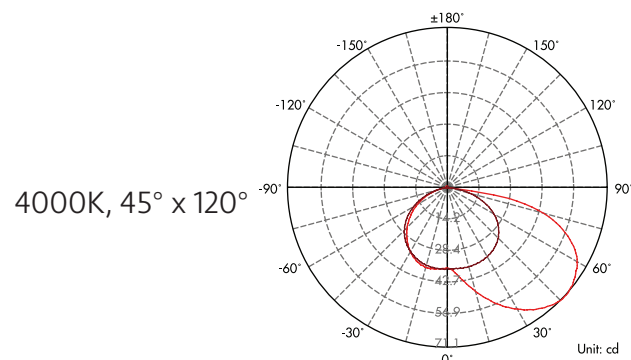



F22

FLORA RECTANGLE IN-WALL

TERRAIN SERIES

NON-DIMMABLE DRIVERS



Model	LB55504
Wattage	60W
Dimensions	7.4" x 3.6" x 1.02"
Temperature	IP20
Dimming	Non-Dimmable



Model	LB55450
Wattage	120W
Dimensions	8.66" x 3.6" x 1.61"
Temperature	IP20
Dimming	Non-Dimmable



Model	LB55451
Wattage	200W
Dimensions	10.23" x 4.05" x 1.81"
Temperature	IP20
Dimming	Non-Dimmable

**Flora Landscape Light Fixture are not compatible with Dimmable Drivers*