

PROJECT:

PREPARED BY:

TYPE:



LDG

LEDGE COVE WALL WASHER



FEATURES

- Multiple lengths available
- Powder coated aluminum body
- 8 watt per foot
- ETL listed
- 150 Degree Rotatable
- 3 Year warranty

SPECIFICATIONS

Color Temperature	2700K, 3000K, 3500K, 4000K, 6500K	Surface Finishing	Power Coat
Length	1FT, 2FT, 4FT	Rotation	150°
Power Consumption	8W/FT	CRI	≥80
Beam Angle	15°/25°/35°/120°/20° x 40°	Delivered Output	100LM/W
Dimming	0-10/Dali/On-Off/DMX512	Operating Temperature	-20°C to 40°C
Dimming Range	10%-100%	Ingress Protection Rating	IP20
Housing Material	Aluminum	Certification	ETL
Input Voltage	120V/240V/100-277V		

ORDERING GUIDE









LDG - _____ - _____ - _____ - _____ - _____ - _____ **Example: LDG-1-18-120-TRA-15-BK**

Model	Length	Color Temperature	Voltage	Dimming	Optics	Finish
LDG	1 1FT	18 1800K	120 120V	0-10 0-10V	15 15°	BK Black WT White
	2 2FT	27 2700K	240 240V	DLI DALI	25 25°	
	4 4FT	30 3000K	UNV 100-277V	OF ON/OFF	35 35°	
		35 3500K		DMX DMX512	120 120°	
		40 4000K			WW 20° x 40°	
		65 6500K				
Accessories						
LDG	ST20 CW36 CW72 CW108	Starting Wire, 20inch Coupling Wire, 36inch Coupling Wire, 72inch Coupling Wire, 108inch				



LDG LEDGE COVE WALL WASHER

DIMENSIONS

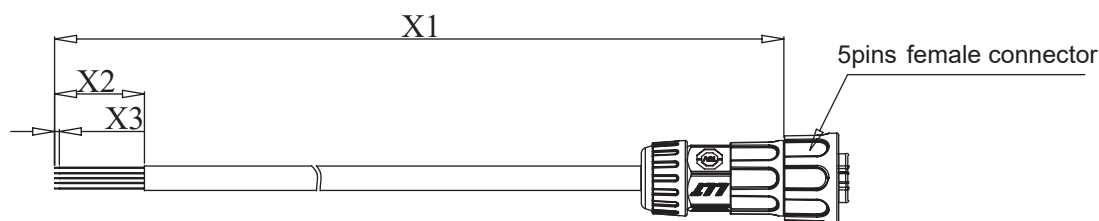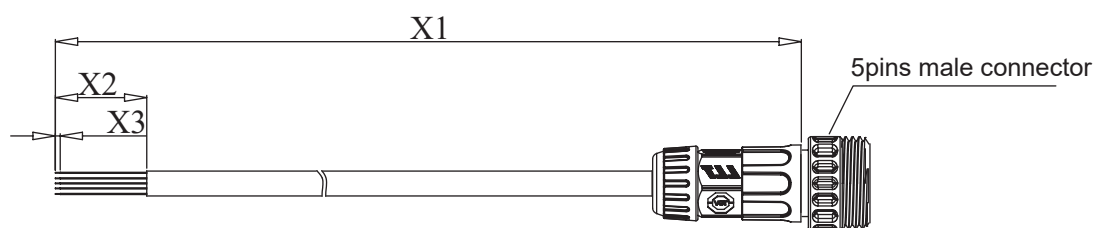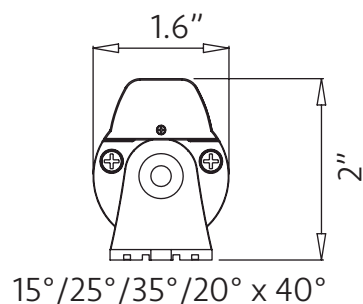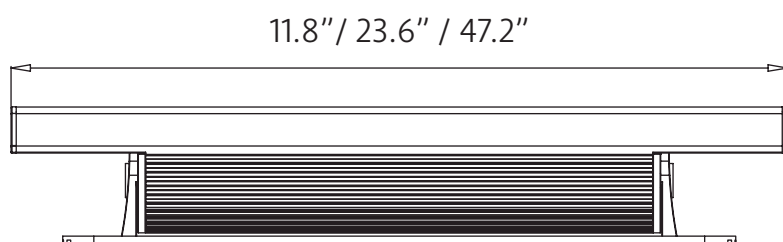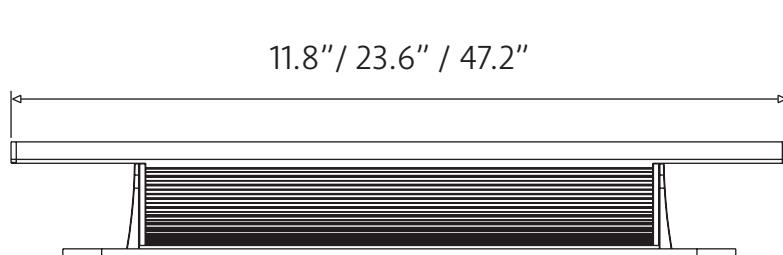




LDG

LEDGE COVE WALL WASHER

MAX RUN

0-10V Dimmer:

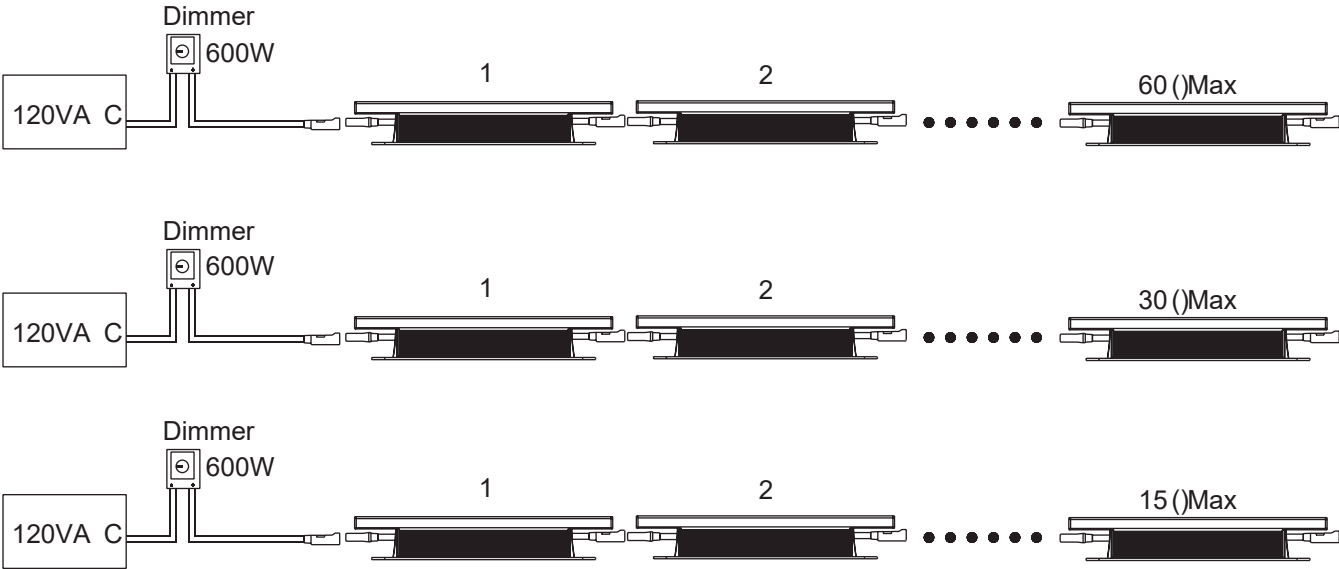

Dimmer=600 W,240V/277A C

Length	Input Volt.	Connection Qty (Max)
1FT	240/277 VA C	60PCS
2FT	240/277 VA C	30PCS
4FT	240/277 VA C	15PCS

PROJECT:

PREPARED BY:

TYPE:



LDG LEDGE COVE WALL WASHER

FINISHES

Black Powered Coated Aluminum

White Powered Coated Aluminum







LDG LEDGE COVE WALL WASHER

PHOTOMETRIC GRAPH

120°, 3000K

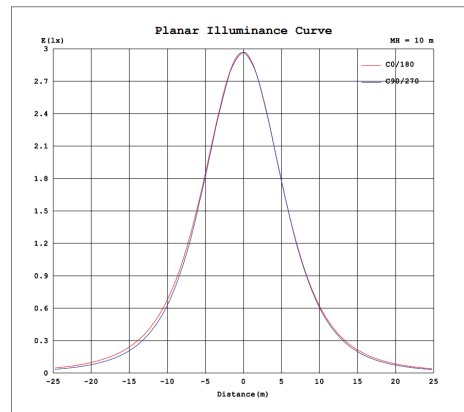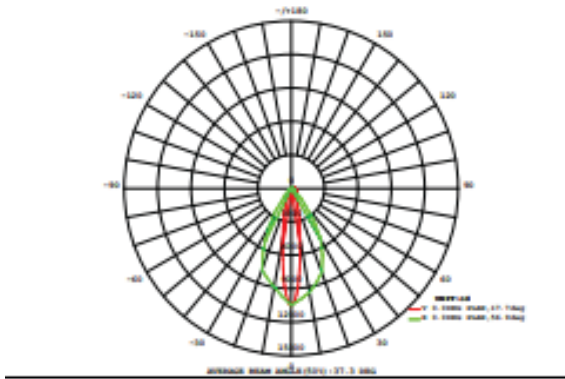

15° x 55°, 3000K

