



# LDG LEDGE COVE



## FEATURES

- Multiple lengths available
- Powder coated aluminum body
- 8 watt per foot
- ETL listed
- 150 Degree Rotatable
- 3 Year warranty

## SPECIFICATIONS

Color Temperature	2700K, 3000K, 4000K, 6500K	Surface Finishing	Power Coat
Length	1FT, 2FT, 4FT	Rotation	150°
Power Consumption	8W/FT	CRI	≥80
Beam Angle	15°/25°/35°/120°/20° x 40°	Delivered Output	100LM/W
Dimming	0-10/Dali/On-Off/DMX512	Operating Temperature	-20°C to 40°C
Dimming Range	10%-100%	Ingress Protection Rating	IP20
Housing Material	Aluminum	Certification	ETL
Input Voltage	120V/240V/100-277V		

## ORDERING GUIDE







LDG- \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ **Example: LDG-1-18-120-TRA-15-BK**

Model	Length	Color Temperature	Voltage	Dimming	Optics	Finish
LDG	<b>1</b> 1FT	<b>18</b> 1800K	<b>120</b> 120V	<b>0-10</b> 0-10V	<b>15</b> 15°	<b>BK</b> Black <b>WT</b> White
	<b>2</b> 2FT	<b>27</b> 2700K	<b>240</b> 240V	<b>DLI</b> DALI	<b>25</b> 25°	
	<b>4</b> 4FT	<b>30</b> 3000K	<b>UNV</b> 100-277V	<b>OF</b> ON/OFF	<b>35</b> 35°	
		<b>40</b> 4000K		<b>DMX</b> DMX512	<b>120</b> 120°	
		<b>65</b> 6500K			<b>WW</b> 20° x 40°	
Accessories						
LDG	ST20 CW36 CW72 CW108	Starting Wire, 20inch Coupling Wire, 36inch Coupling Wire, 72inch Coupling Wire, 108inch				





# LDG LEDGE COVE WALL WASHER

## DIMENSIONS

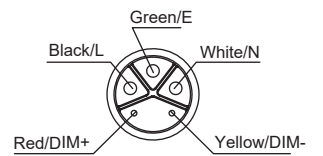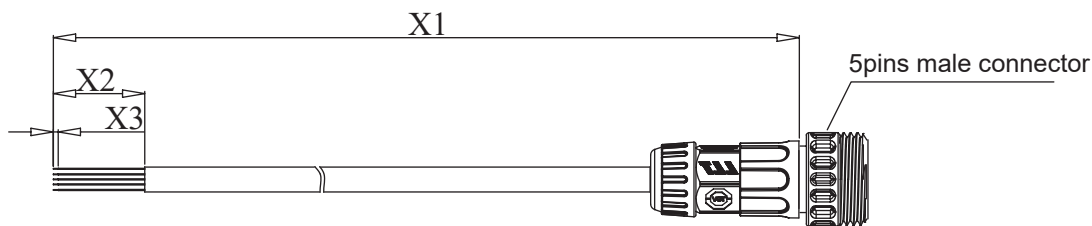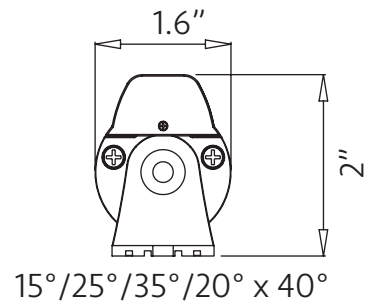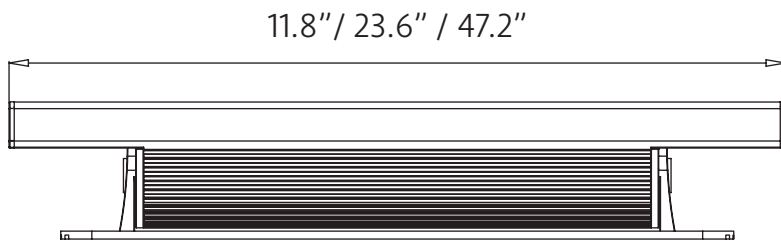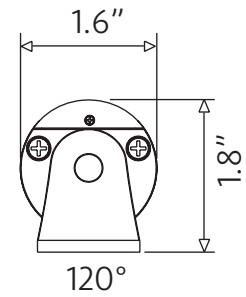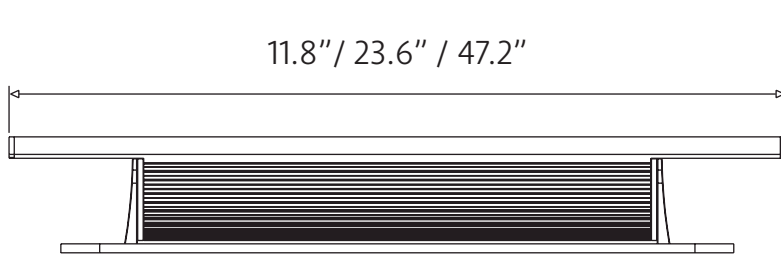

male connector front view

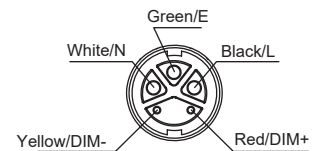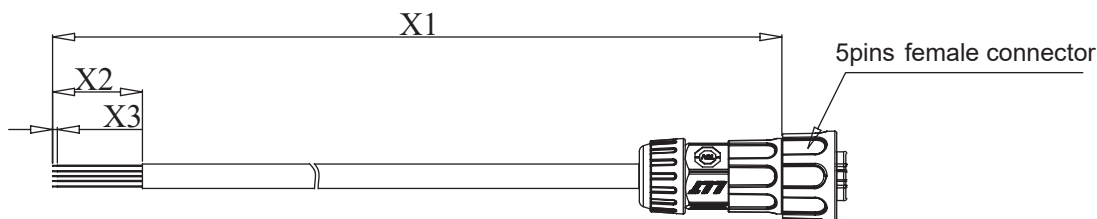


female connector front view



# LDG LEDGE COVE WALL WASHER

## MAX RUN

0-10V Dimmer:

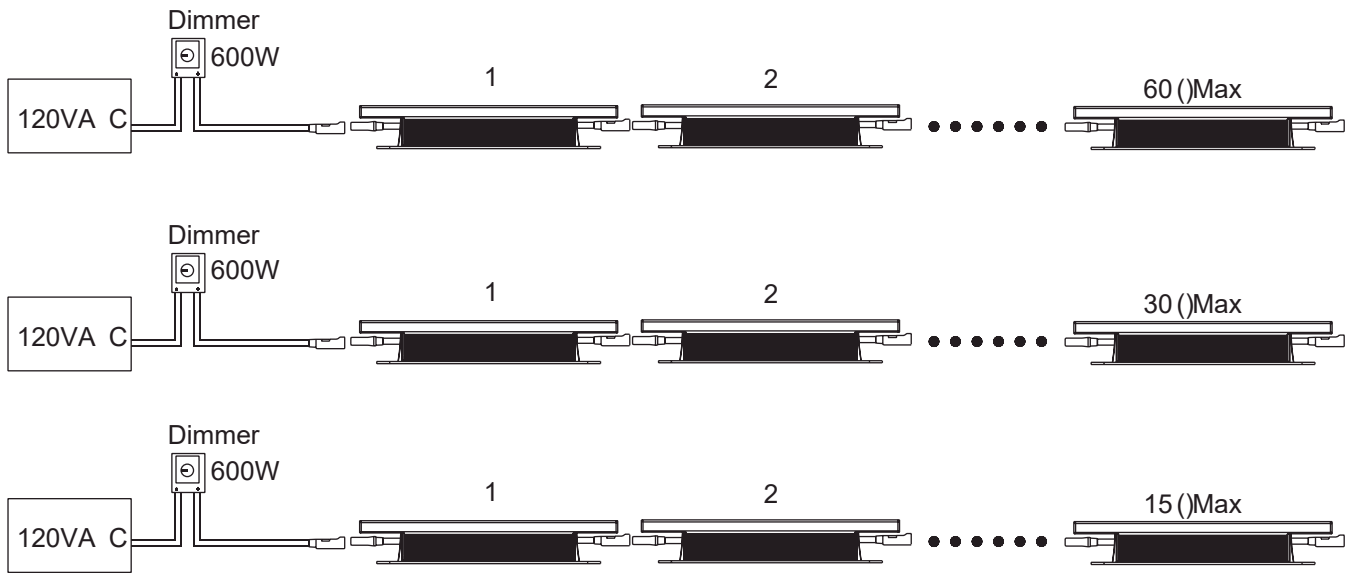

Dimmer=600 W,240V/277A C

Length	Input Volt.	Connection Qty (Max)
1FT	240/277 VA C	60PCS
2FT	240/277 VA C	30PCS
4FT	240/277 VA C	15PCS



# LDG LEDGE COVE WALL WASHER

## FINISHES

Black Powered Coated Aluminum

White Powered Coated Aluminum







# LDG LEDGE COVE WALL WASHER

## PHOTOMETRIC GRAPH

120°, 3000K

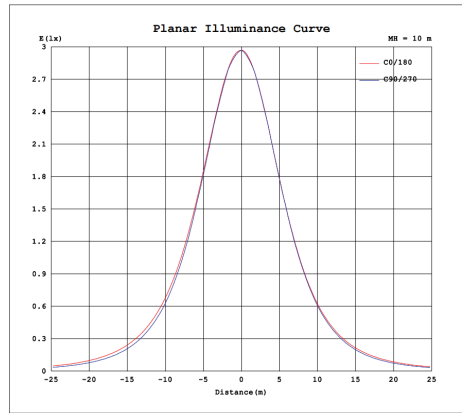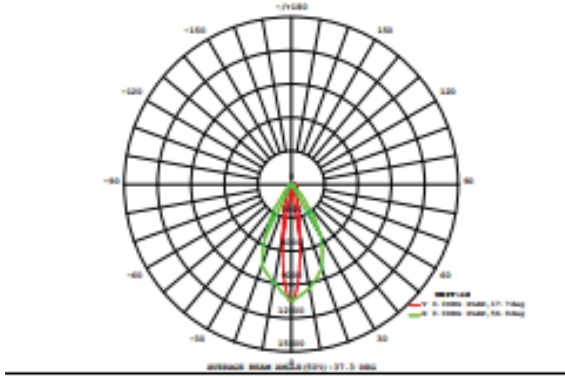

15° x 55°, 3000K

