



VOR25TMS

VORTEX 2.5 2 HEAD TRIMLESS

2.5" RECESSED LED DOWNLIGHT



FEATURES

- Air-tight and wet location approved
- Type ic rated - approved for direct contact with insulation
- Downlight housing is not required for insulated ceilings
- Quick connect wire allows for efficient installation
- Isolated driver inside junction box
- New construction plate available
- Optional Emergency Backup
- 5 year warranty

SPECIFICATIONS

Input Voltage	120-277V	Dimming	5% - 100% Triac & 0-10V
Wattage	9W/14W	Lamp Life	50,000hr
Lumens (Delivered)	800LM/1400LM	Environment	IP65 Wet Location
Efficacy(LPW)	>82 lm/W	Material	Aluminum Body with Anodized Heat Sink
Color Temp	18K, 22K, 27K, 30K, 35K, 40K, 50K (CCT adj.)	Operating Temp	-4°F - 104°F
CRI	>90	Cut out	3.42" x 7.16"
Beam Angle	24° / 38° / 50°		





VOR25TMS

VORTEX 2.5 2 HEAD TRIMLESS

2.5" RECESSED LED DOWNLIGHT

ORDERING GUIDE

VOR25TMS - 2H - _____ - UNV - _____ - _____ - _____

Example: VOR25TMS-2H-9-18-UNV-24-HX-WHPWHT-EM

Model	Configuration	Wattage	Color Temp.	Input Voltage	Optics	Lens
VOR25TMS-2H	2H 2 Head	9 9W (800LM) 14 14W (1400LM)	CCT 5CCT Select DTW Dim-Warm (1800K-2200K)	UNV 120-277	24 24° 38 38° 50 50°	HX Hex Louver
Finish	EM					
WHPWHT White Plate/White Trim	EM (Leave Blank for Non-em)					
WHPBKT White Plate/Black Trim						
BKPWHT Black Plate/White Trim	**EM to be functional with 1 head only**					
BKPBKT Black Plate/Black Trim						

***Lead time for the Vortex series on in-stock configuration will be 1 week**

NEW CONSTRUCTION HOUSING




Model	Description
NCH2H	New Construction Housing



VOR25TMS VORTEX 2.5 2 HEAD TRIMLESS

2.5" RECESSED LED DOWNLIGHT

DIMENSION

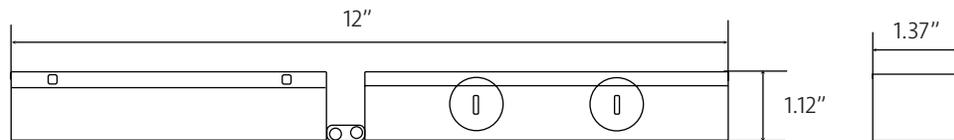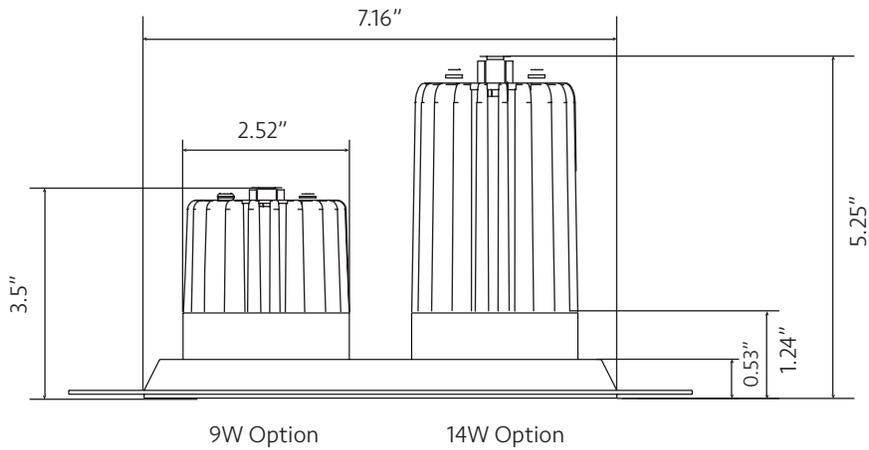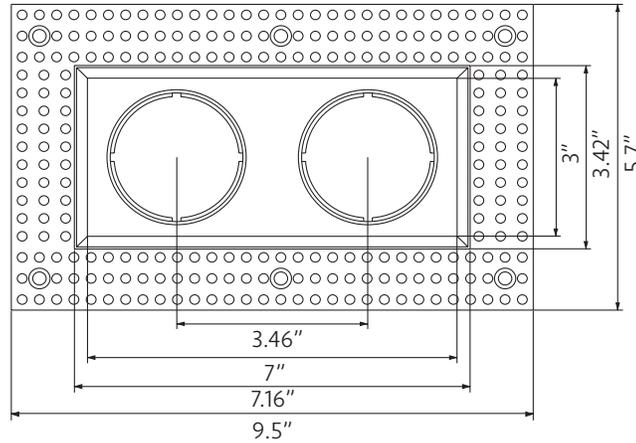



VOR25TMS

VORTEX 2.5 2 HEAD TRIMLESS

2.5" RECESSED LED DOWNLIGHT

LENS OPTION

Standard Optic



Hex Louver Lens






VOR25TMS VORTEX 2.5 2 HEAD TRIMLESS

2.5" RECESSED LED DOWNLIGHT

2 HEAD DRIVER

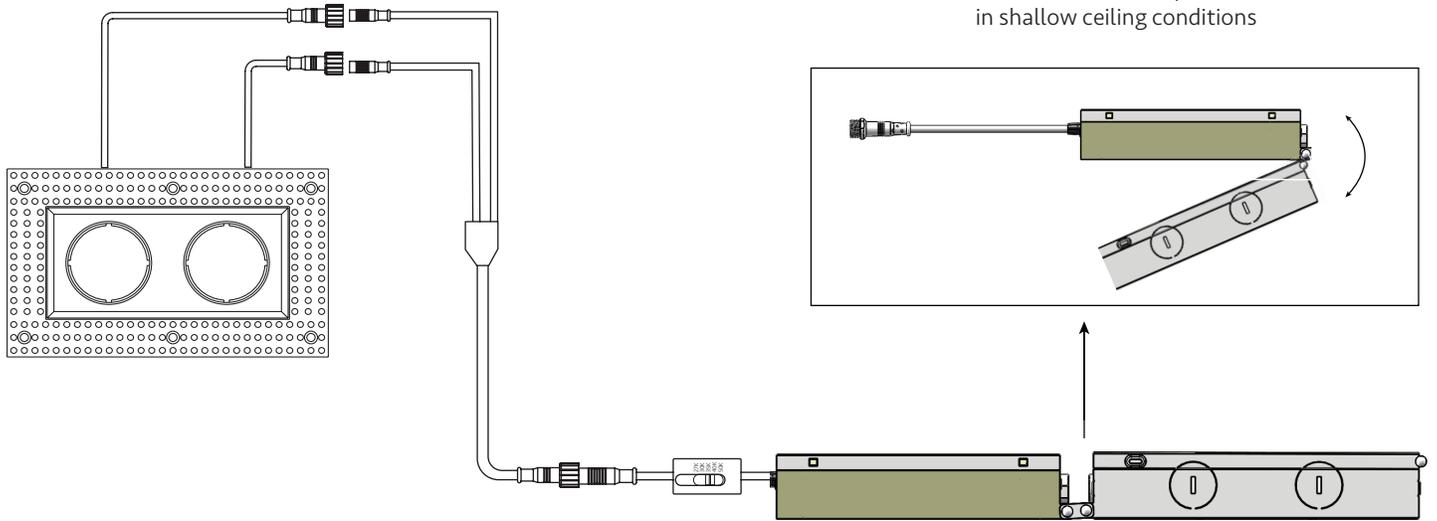



VOR25TMS VORTEX 2.5 2 HEAD TRIMLESS

2.5" RECESSED LED DOWNLIGHT


ACCESSORIES

NEW CONSTRUCTION MOUNTING PLATE NCH2H

Constructed out of galvanized steel

Magnetic plate and driver facilitate easy and secure placement


Adjustable Hanger Bars up to 24"

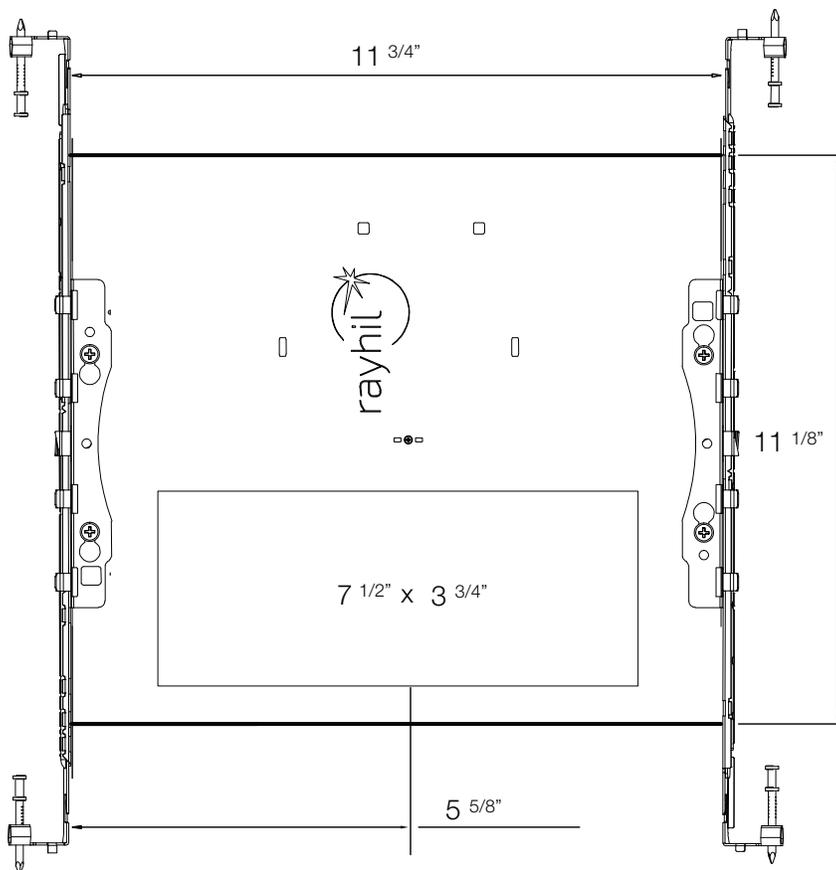




VOR25TMS VORTEX 2.5 2 HEAD TRIMLESS

2.5" RECESSED LED DOWNLIGHT

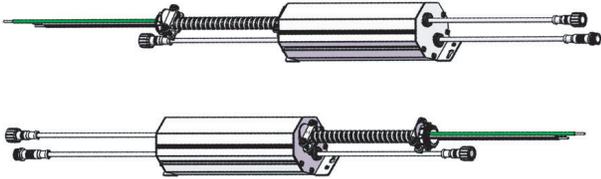

EMERGENCY BACK UP DRIVER
RAD25/35-EM

90 minute run time
See spec sheet for further information

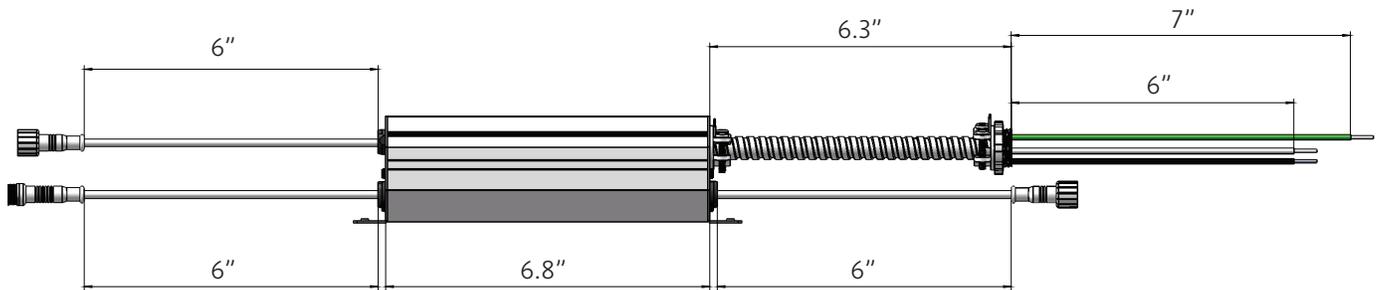



VOR25TMS

VORTEX 2.5 2 HEAD TRIMLESS

2.5" RECESSED LED DOWNLIGHT

COMPATIBLE DRIVERS

LURTRON	LOAD (W)
SKYLARK CONTOUR LECL-153P	150W
SKYLARK CONTOUR CTCL-150H	150W
SKYLARK CONTOUR LGCL-153PLH	150W
SKYLARK CONTOUR CTCL-153P	150W
SKYLARK CONTOUR SCL-153P	150W
SKYLARK CONTOUR S-600P	600W
CASETA PD-6WCL	600W
CASETA PD-5NE	150W
CASETA PD-10NXD	250W
DIVA DVCL-153P	150W
TOGGLER TGGL-153P	150W
ARIADNI AYCL-153P	150W
MAESTRO MACL-153M	150W

LURTRON	LOAD (W)
ILLUMATEC IPL06	150W
SURESLIDE 6672	150W
SURESLIDE 6674	150W

EATON	LOAD (W)
SMART DIMMER AAL06	300W

PASS & SEYMOUR	LOAD (W)
HARMONY DCL453PTCCCV6	150W

GE	LOAD (W)
ROCKER 10464	150W
TOGGLE 18027	150W