



# VOR25TMS

## VORTEX 2.5 3 HEAD TRIMLESS

2.5" RECESSED LED DOWNLIGHT



### FEATURES

- Air-tight and wet location approved
- Type IC rated - approved for direct contact with insulation
- Downlight housing is not required for insulated ceilings
- Quick connect wire allows for efficient installation
- Isolated driver inside junction box
- New construction plate available
- Optional Emergency Backup
- 5 year warranty

### SPECIFICATIONS

Input Voltage	120-277V	Dimming	5% - 100% Triac & 0-10V
Wattage	9W/14W	Lamp Life	50,000hr
Lumens (Delivered)	800LM/1400LM	Environment	IP65 Wet Location
Efficacy(LPW)	>82 lm/W	Material	Aluminum Body with Anodized Heat Sink
Color Temp	18K, 22K, 27K, 30K, 35K, 40K, 50K (CCT adj.)	Operating Temp	-4°F - 104°F
CRI	>90	Cut out	3.42" x 10.63"
Beam Angle	24° / 38° / 50°		





# VOR25TMS

## VORTEX 2.5 3 HEAD TRIMLESS

2.5" RECESSED LED DOWNLIGHT

### ORDERING GUIDE

VOR25TMS - 3H - \_\_\_\_\_ - \_\_\_\_\_ - UNV - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

**Example: VOR25TMS-3H-9-18-UNV-24-HX-WHPWHT-EM**

Model	Configuration	Wattage	Color Temp.	Input Voltage	Optics	Lens
VOR25TMS-3H	<b>3H</b> 3 Head	<b>9</b> 9W (800LM) <b>14</b> 14W (1400LM)	<b>CCT</b> 5CCT Select <b>DTW</b> Dim-Warm (1800K-2200K)	<b>UNV</b> 120-277	<b>24</b> 24° <b>38</b> 38° <b>50</b> 50°	<b>HX</b> Hex Louver
Finish	EM					
<b>WHPWHT</b> White Plate/White Trim	EM (Leave Blank for Non-em)					
<b>WHPBKT</b> White Plate/Black Trim						
<b>BKPWHT</b> Black Plate/White Trim	**EM to be functional with 1 head only**					
<b>BKPBKT</b> Black Plate/Black Trim						

**\*Lead time for the Vortex series on in-stock configuration will be 1 week**

### NEW CONSTRUCTION HOUSING


Model	Description
NCH3H	New Construction Housing



# VOR25TMS VORTEX 2.5 3 HEAD TRIMLESS

2.5" RECESSED LED DOWNLIGHT

## DIMENSION

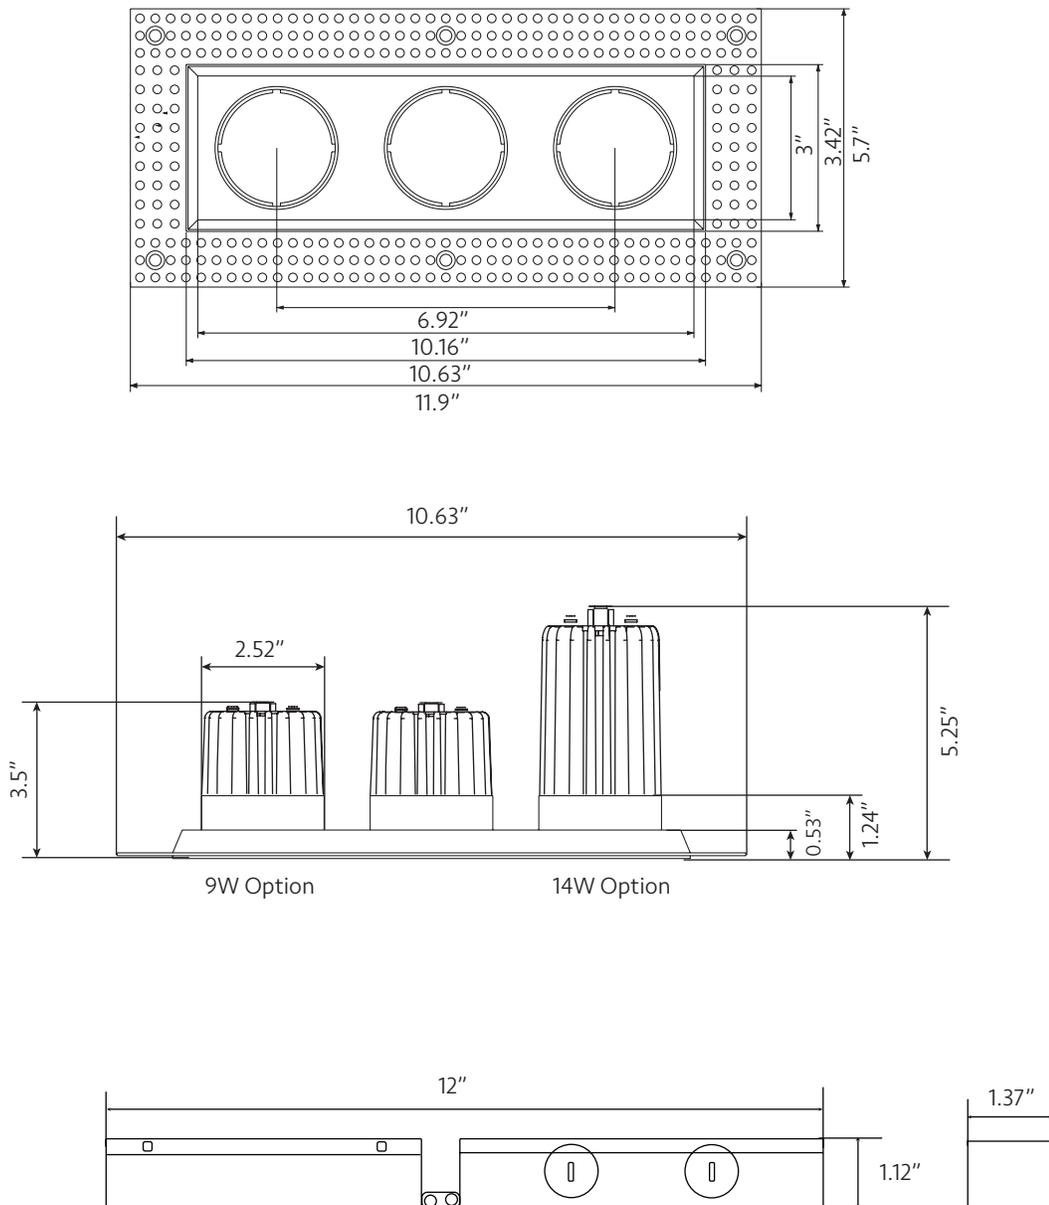



# VOR25TMS

## VORTEX 2.5 3 HEAD TRIMLESS

2.5" RECESSED LED DOWNLIGHT

### LENS OPTION

Standard Optic



Hex Louver Lens






# VOR25TMS VORTEX 2.5 3 HEAD TRIMLESS

2.5" RECESSED LED DOWNLIGHT

## 3 HEAD DRIVER

Innovative foldable driver simplifies installation  
in shallow ceiling conditions

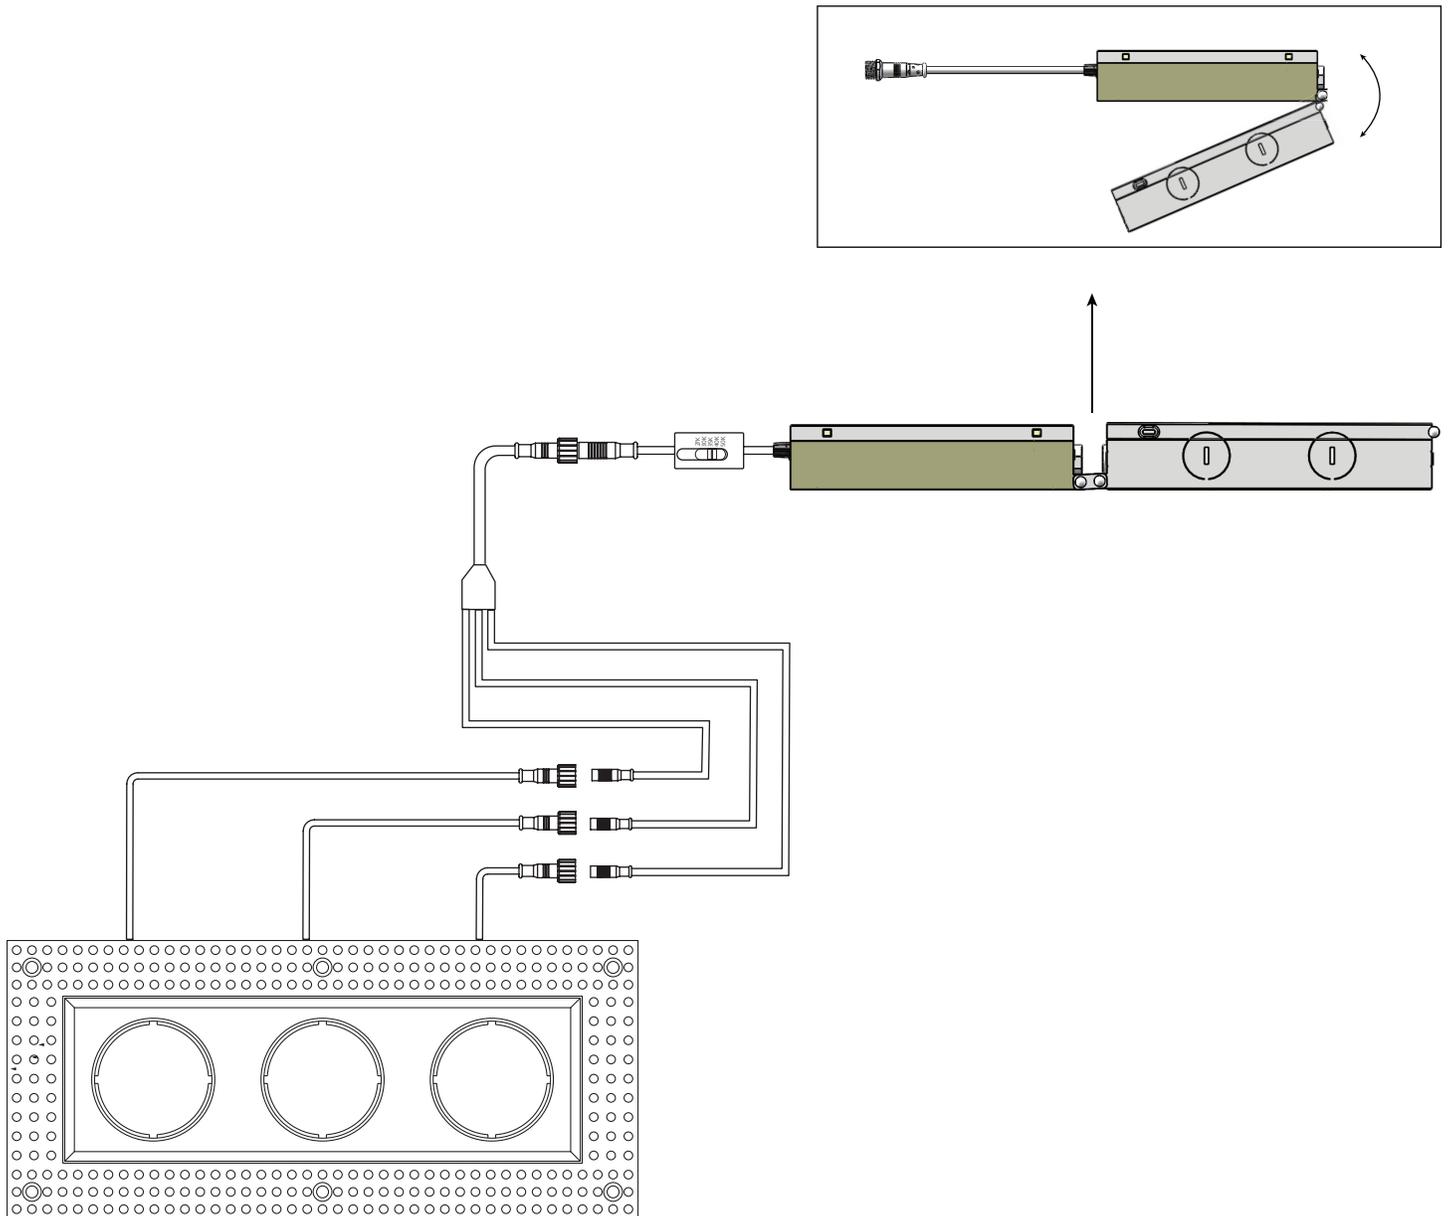



# VOR25TMS

## VORTEX 2.5 3 HEAD TRIMLESS

2.5" RECESSED LED DOWNLIGHT


### ACCESSORIES

#### NEW CONSTRUCTION MOUNTING PLATE NCH3H

Constructed out of galvanized steel

Magnetic plate and driver facilitate easy and secure placement

Adjustable Hanger Bars up to 24"

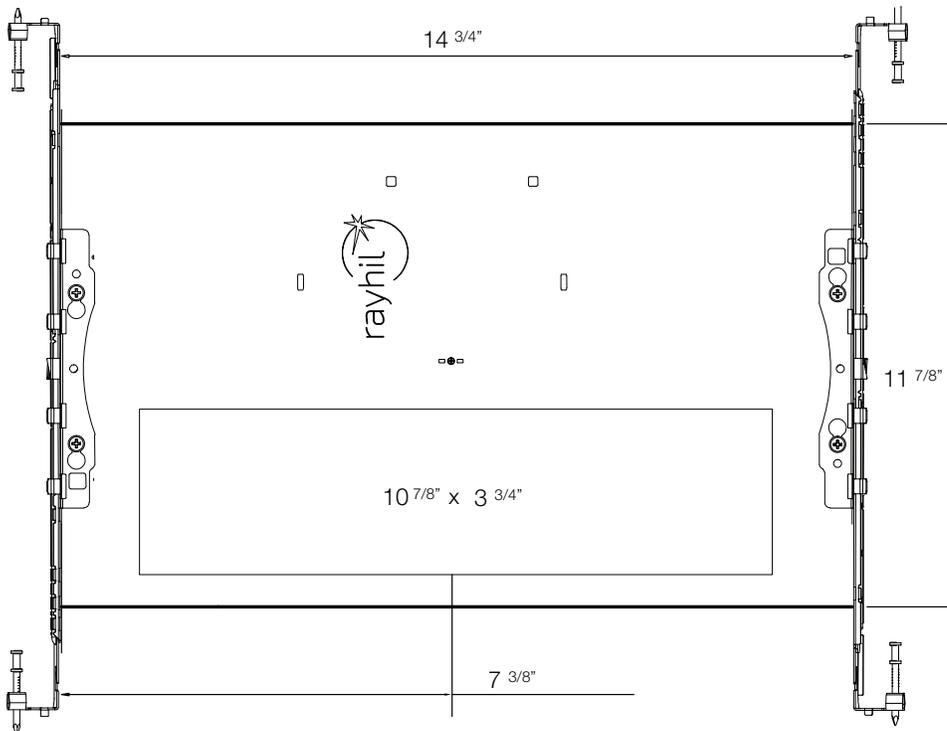




# VOR25TMS


## VORTEX 2.5 3 HEAD TRIMLESS

2.5" RECESSED LED DOWNLIGHT

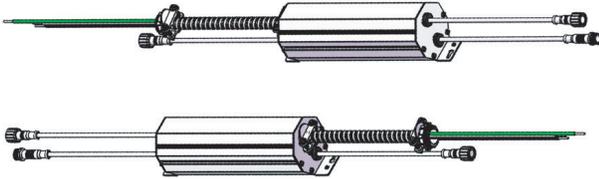

EMERGENCY BACK UP DRIVER  
RAD25/35-EM

90 minute run time  
See spec sheet for further information

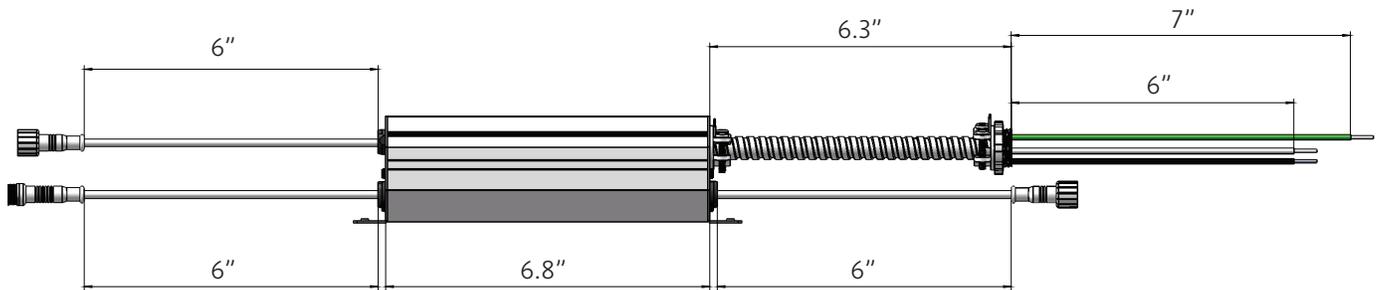



# VOR25TMS

## VORTEX 2.5 3 HEAD TRIMLESS

2.5" RECESSED LED DOWNLIGHT

### COMPATIBLE DRIVERS

LURTRON	LOAD (W)
SKYLARK CONTOUR LECL-153P	150W
SKYLARK CONTOUR CTCL-150H	150W
SKYLARK CONTOUR LGCL-153PLH	150W
SKYLARK CONTOUR CTCL-153P	150W
SKYLARK CONTOUR SCL-153P	150W
SKYLARK CONTOUR S-600P	600W
CASETA PD-6WCL	600W
CASETA PD-5NE	150W
CASETA PD-10NXD	250W
DIVA DVCL-153P	150W
TOGGLER TGGL-153P	150W
ARIADNI AYCL-153P	150W
MAESTRO MACL-153M	150W

LURTRON	LOAD (W)
ILLUMATEC IPL06	150W
SURESLIDE 6672	150W
SURESLIDE 6674	150W

EATON	LOAD (W)
SMART DIMMER AAL06	300W

PASS & SEYMOUR	LOAD (W)
HARMONY DCL453PTCCCV6	150W

GE	LOAD (W)
ROCKER 10464	150W
TOGGLE 18027	150W