




VOR35TMS

VORTEX 3.5 4 HEAD SQUARE TRIMLESS

3.5" RECESSED LED DOWNLIGHT

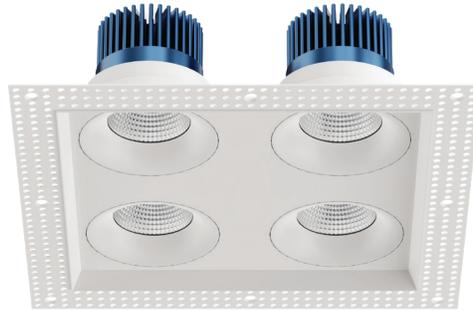

FEATURES

- Air-tight and wet location approved
- Type IC rated - approved for direct contact with insulation
- Downlight housing is not required for insulated ceilings
- Quick connect wire allows for efficient installation
- Isolated driver inside junction box
- Optional Emergency Backup
- 5 year warranty

SPECIFICATIONS

Input Voltage	120-277V	Dimming	5% - 100% Triac & 0-10V
Wattage	15W	Lamp Life	50,000hr
Lumens (Delivered)	1250LM	Environment	IP65 Wet Location
Efficacy(LPW)	>82 lm/W	Material	Aluminum Body with Anodized Heat Sink
Color Temp	18K, 22K, 27K, 30K, 35K, 40K, 50K (CCT adj.)	Operating Temp	-4°F - 104°F
CRI	>90	Cut out	9.53" x 9.53"
Beam Angle	15°/24° / 38°/50°		





VOR35TMS

VORTEX 3.5 4 HEAD SQUARE TRIMLESS

3.5" RECESSED LED DOWNLIGHT

ORDERING GUIDE

VOR35TMS - 4S - 15 - _____ - UNV - _____ - _____ - _____ - _____

Example: VOR35TMS-4S-15-CCT-UNV-14-HX-WHPWHT-EM

Model	Configuration	Wattage	Color Temp.	Input Voltage	Optics	Lens
VOR35TMS-4S	4S 4 Head Square	15 15W (1250LM)	CCT 5CCT Select DTW Dim-Warm (1800K-2200K)	UNV 120-277	15 15° 24 24° 38 38° 50 50°	HX Hex Louver F Frosted SL Solite
Finish	EM					
WHPWHT White Plate/White Trim	EM (Leave Blank for Non-em)					
WHPBKT White Plate/Black Trim						
BKPWHT Black Plate/White Trim	**EM to be functional with 1 head only**					
BKPBKT Black Plate/Black Trim						




***Lead time for the Vortex series on in-stock configuration will be 1 week**



VOR35TMS VORTEX 3.5 4 HEAD SQUARE TRIMLESS

3.5" RECESSED LED DOWNLIGHT

DIMENSION

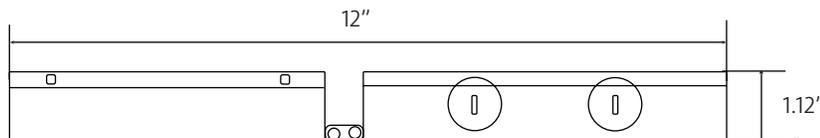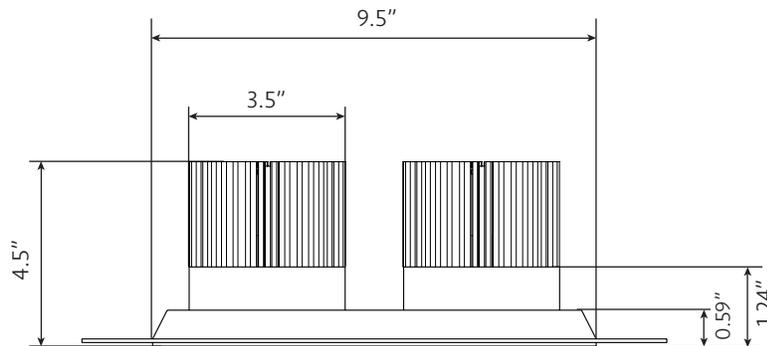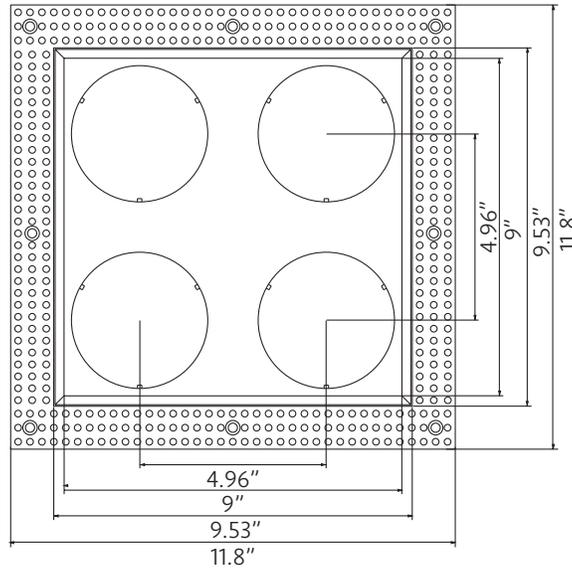



VORTEX 3.5 4 HEAD SQUARE TRIMLESS

VOR35TMS

3.5" RECESSED LED DOWNLIGHT

LENS OPTION

Standard Optic



Hex Louver Lens



Frosted Lens







VOR35TMS VORTEX 3.5 4 HEAD SQUARE TRIMLESS

3.5" RECESSED LED DOWNLIGHT

4 HEAD SQUARE DRIVER


Innovative foldable driver simplifies installation
in shallow ceiling conditions

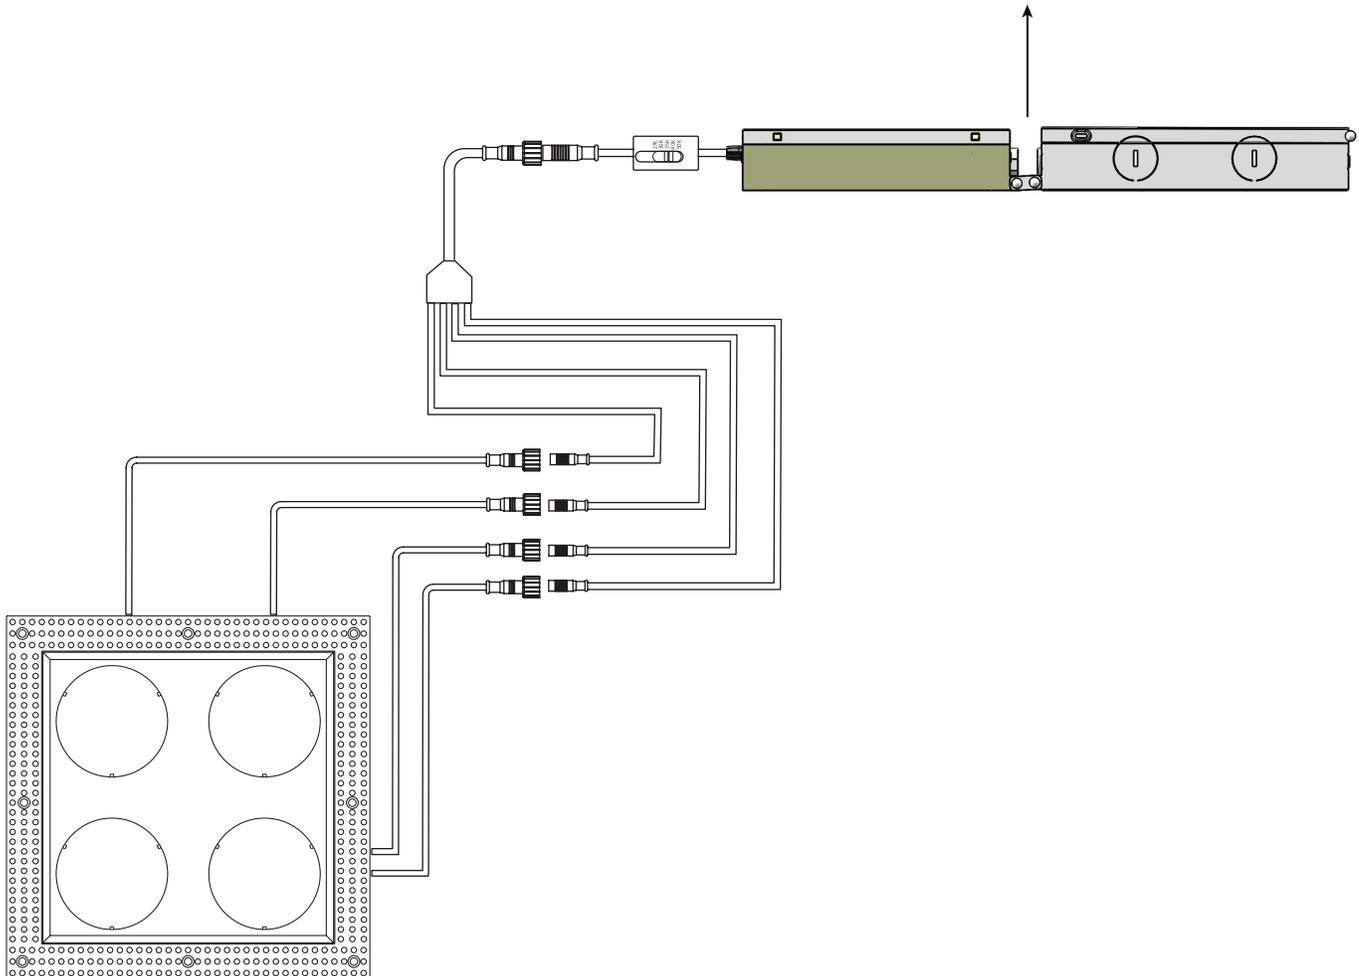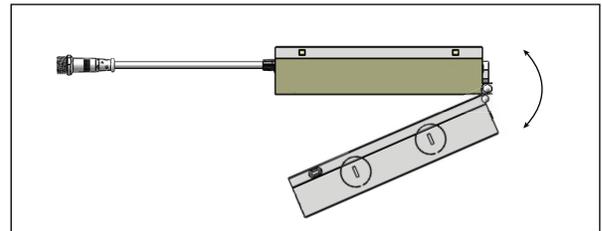




VORTEX 3.5 4 HEAD SQUARE TRIMLESS

3.5" RECESSED LED DOWNLIGHT

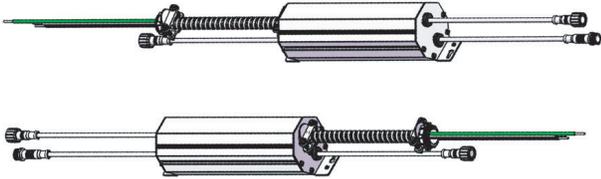

EMERGENCY BACK UP DRIVER
RAD25/35-EM

90 minute run time
See spec sheet for further information

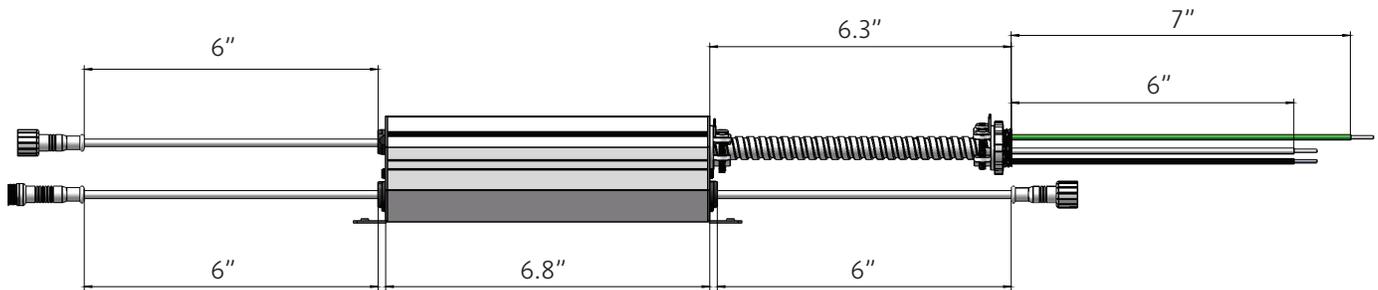



VORTEX 3.5 4 HEAD SQUARE TRIMLESS

VOR35TMS

3.5" RECESSED LED DOWNLIGHT

COMPATIBLE DRIVERS

LURTRON	LOAD (W)
SKYLARK CONTOUR LECL-153P	150W
SKYLARK CONTOUR CTCL-150H	150W
SKYLARK CONTOUR LGCL-153PLH	150W
SKYLARK CONTOUR CTCL-153P	150W
SKYLARK CONTOUR SCL-153P	150W
SKYLARK CONTOUR S-600P	600W
CASETA PD-6WCL	600W
CASETA PD-5NE	150W
CASETA PD-10NXD	250W
DIVA DVCL-153P	150W
TOGGLER TGGL-153P	150W
ARIADNI AYCL-153P	150W
MAESTRO MACL-153M	150W

LURTRON	LOAD (W)
ILLUMATEC IPL06	150W
SURESLIDE 6672	150W
SURESLIDE 6674	150W

EATON	LOAD (W)
SMART DIMMER AAL06	300W

PASS & SEYMOUR	LOAD (W)
HARMONY DCL453PTCCCV6	150W

GE	LOAD (W)
ROCKER 10464	150W
TOGGLE 18027	150W