




ROUND DOUBLE DIAMOND LENS

RECESSED LED DOWNLIGHT

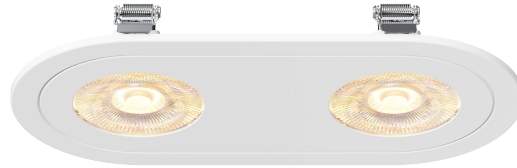

FEATURES

- Ultra slim 1.25" height
- Interchangeable trim rings
- Universal voltage
- 5 CCT selectable

SPECIFICATIONS

Wattage	2 x 12W	Efficacy	78LM/W
Lumens	1980LM	Environment	Damp Location
Input Voltage	120-277V	Material	Aluminum
CCT	27K/30K/35K/40K/50K/ 5 CCT SELECT	Operating Temperature	-25°C - 40°C
CRI	90	Certification	ETL
Beam Angle	15°/ 24°/ 36°/ 50°	Cut Out	10"W x 5" H
Dimming	Triac & 0-10V		

ORDERING GUIDE

LCD - RDD - LS - _____ - UNV - _____ - _____ *Example: LCD-RDD-27-UNV-15-WT-SB*

Model	Wattage	Lumens	Color Temperature	Input Voltage	Beam Angle	Trim Finish	Installation
LCD-RDD-LS	2x12W	1980LM	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K 5CCT 5CCT Selectable	UNV 120-277V	15 15° 24 24° 36 36° 50 50°	WT White BK Black BN Brushed Nickel BZ Bronze CP Copper	Recessed (Leave Blank) SB Surface box




* NCH-LCD - New Construction Plate



LCD ROUND DOUBLE DIAMOND LENS

RECESSED LED DOWNLIGHT

DIMENSION

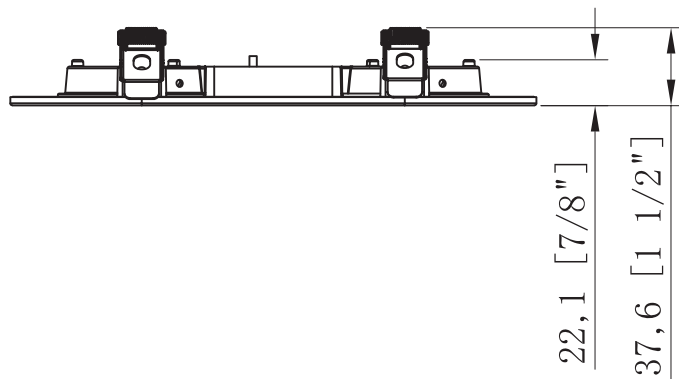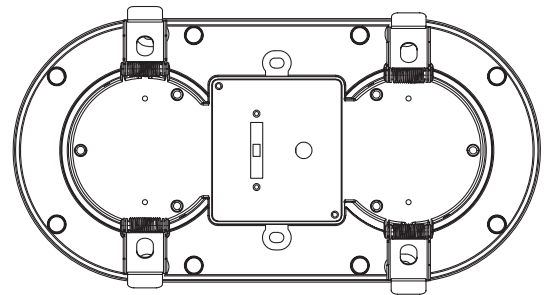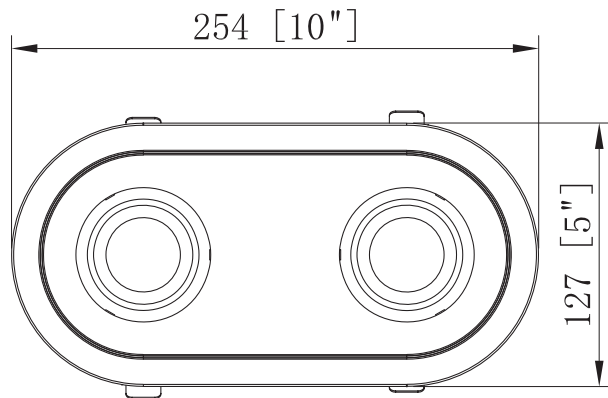

PROJECT:

PREPARED BY:

TYPE:








ROUND DOUBLE DIAMOND LENS

RECESSED LED DOWNLIGHT

ACCESSORIES

Surface Box

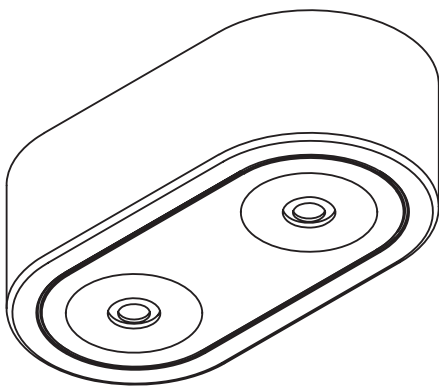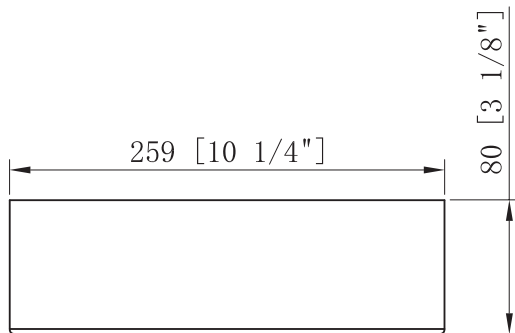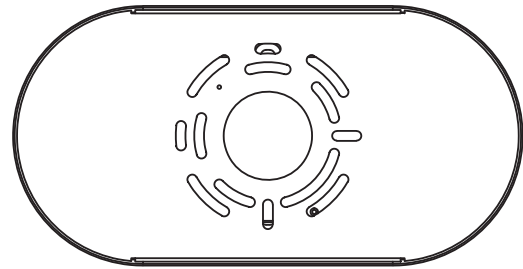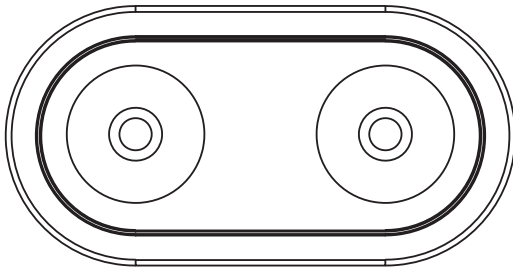



LCD ROUND DOUBLE DIAMOND LENS

RECESSED LED DOWNLIGHT

NEW CONSTRUCTION PLATE

