




LUCID

ROUND DOUBLE OPTIC LENS

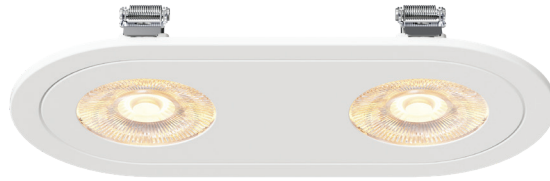

FEATURES

- Ultra slim 1.25" height
- Interchangeable trim rings
- Universal voltage
- 5 CCT selectable

SPECIFICATIONS

Wattage	2 x 9W / 2 x 12W / 2X 15W	Efficacy	80LM/W
Lumens (Delivered)	1440LM/ 1920LM/ 2500LM	Environment	IP65
Input Voltage	120-277V	Material	Aluminum
CCT	27K/30K/35K/40K/50K/ 5 CCT SELECT	Operating Temperature	-25°C - 40°C
CRI	90	Certification	ETL
Beam Angle	15°/ 24°/ 36°/ 50°	Cut Out	10" W x 5" H
Dimming	Triac & 0-10V		

ORDERING GUIDE

LCD - RDD - LS - _____ - UNV - _____ - _____ - _____

Example: LCD-RDD-10-27-UNV-15-WT-SB-RD-EM

Model	Wattage	Lumens	Color Temperature	Input Voltage	Beam Angle	Trim Finish
LCD-RDD-LS	15 2x15W 12 2x12W 9 2x9W	2500LM 1920LM 1440LM	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K 5CCT 5CCT Selectable	UNV 120-277V	15 15° 24 24° 36 36° 50 50°	WT White BK Black BN Brushed Nickel BZ Bronze CP Copper
Installation	Trim Shape	EM				
Recessed (Leave Blank)	RD Round SQ Square	EM				
SB Surface box						




* NCH-LCD26 - New Construction Plate



LUCID

ROUND DOUBLE OPTIC LENS

DIMENSION

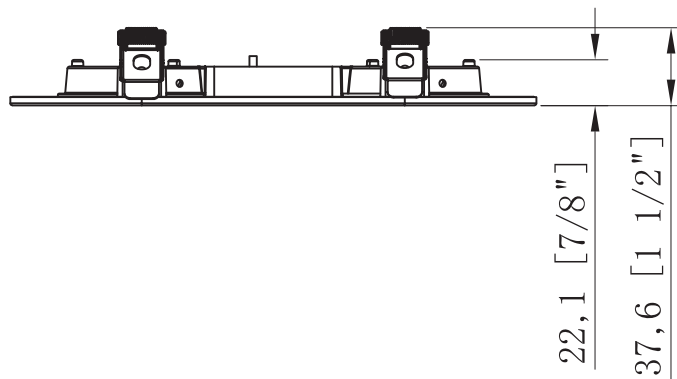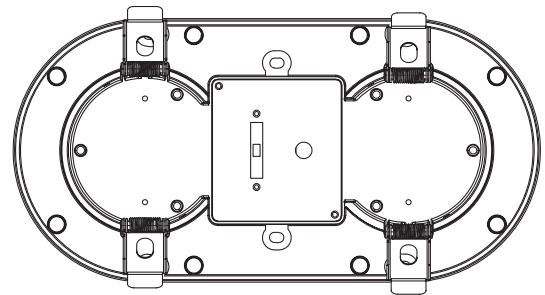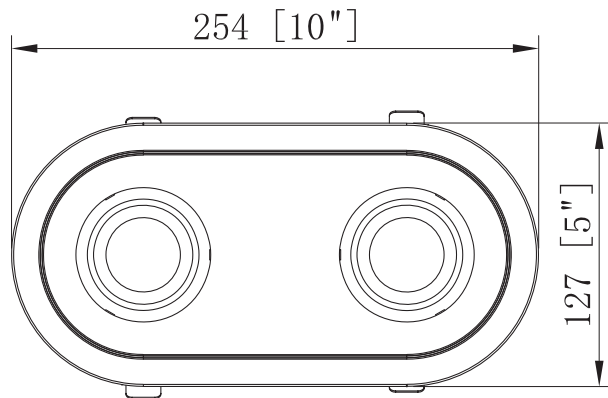








LUCID

ROUND DOUBLE OPTIC LENS

ACCESSORIES

Surface Box

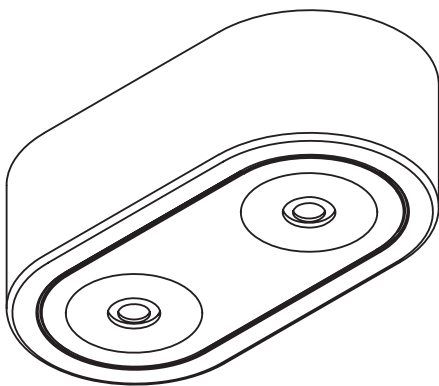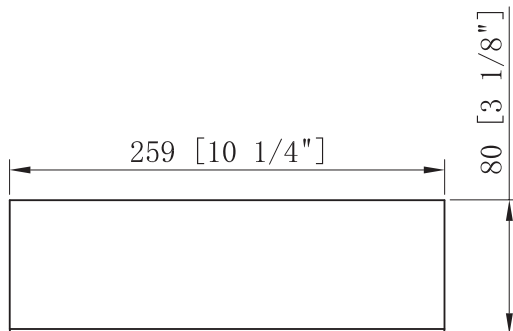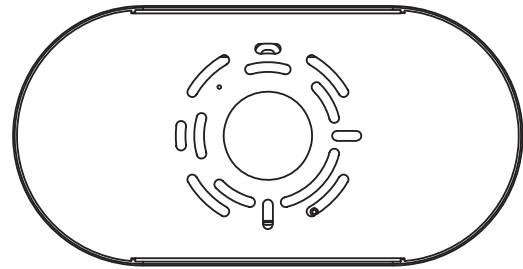
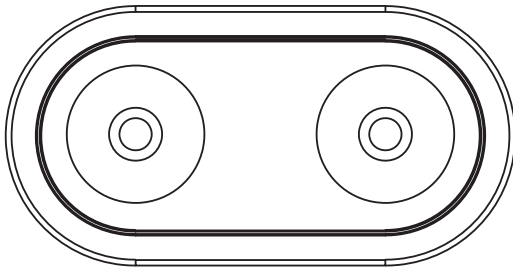




LUCID

ROUND DOUBLE OPTIC LENS

NEW CONSTRUCTION PLATE

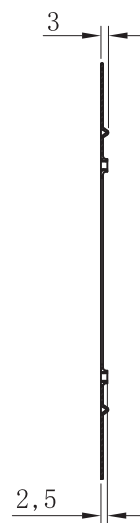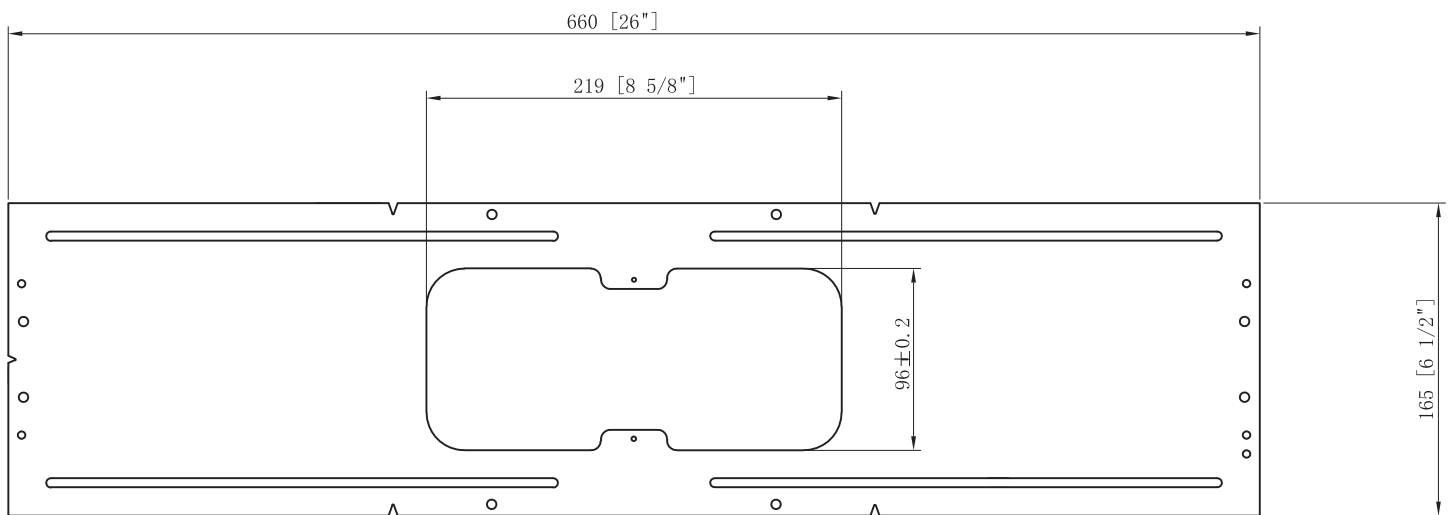





LUCID

ROUND DOUBLE OPTIC LENS

TRIM OPTIONS

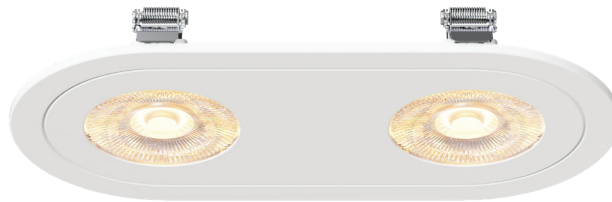

Round

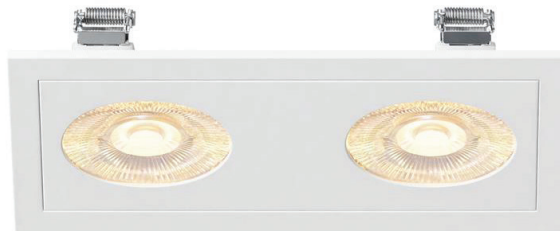

Square



LUCID

ROUND DOUBLE OPTIC LENS

EMERGENCY BACK UP DRIVER RAD25/35-EM

90 minute run time
See spec sheet for further information

