PROJECT: PREPARED BY: TYPE:

RYNO 1.0 ADJUSTABLE

1" RECESSED LED DOWNLIGHT







FEATURES

- Ultra-small 1" aperture delivers focused, architectural lighting with minimal ceiling disruption.
- Efficient 5W, 7W, 10W modules with 80LM/W, delivering powerful yet low-profile performance.
- Available with multiple trim options including round, square, trimless, millwork, and adjustable, allowing seamless for integration.
- Featuring a sleek, integrated form factor with pressure clips for straight forward installation.

PERFORMANCE

Wattage	5W / 7W / 10W
Lumens (Delivered)	450LM / 560LM / 875LM
Input Voltage	24V
Efficacy	80LM/W
Dimming (Dependent on driver)	PWM, Triac, 0-10V (10%-100%)

MEDIA

Hex Louver
Solite
LS
AS
DA

APPLICATION

Environment	Damp Location
Material	Aluminum
Operating Temperature	-49°F to 113°F
Lifetime	50,000 hrs
Cut Out	1.65"

LIGHT SOURCE

CCT	2700K/3000K/3500K/Dim to Warm
CRI	90

OPTICS

Lens	10°/15°/24°/36°/50°

CERTIFICATION

ETL
CETL
Title 24
FCC
5 Year Warranty

SUPPORTIVE FILE (WEBSITE LINK)

IES File
Installation Guide
Trimmed Configuration
Trimless Mud-In Configuration
Millwork Configuration

PROJECT: PREPARED BY: TYPE:

RYNO 1.0 ADJUSTABLE

1" RECESSED LED DOWNLIGHT

ORDERING GUIDE

RYN1 - _____ - _____ - _____ - _____ - _____


Example: RYN1-5-2790-15L-HX-ADJR-WT

Component		Component Code	Component Detail
	ENGINE	**RYN1-5** **RYN1-7** **RYN1-10** **RYN1-10N**	5W Engine 7W Engine 10W Engine 10W Engine *10 Narrow Beam*
	CHIP	**2790** **3090** **3590** **4090** **DTW**	2700K, 90CRI 3000K, 90CRI 3500K, 90CRI 4000K, 90CRI 1800-3000K Dim to Warm, 98CRI
 Lens	OPTIC	**10L** **15L** **24L** **36L** **50L**	10 Degree ** For use with RYN-10N Only 15 Degree 24 Degree 36 Degree 50 Degree
 Hex Louver	MEDIA	**HX** **SL** **LS** **AS** **DA**	Hex Louver Solite (Leave blank for none) (SL-HX for both)
	TRIM	**ADJR-WT** **ADJR-BK**	Round Adjustble Trim, White Finish Round Adjustble Trim, Black Finish
	REMOTE POWER SUPPLY	**LB55461** **LB55463** **LB55465** **LB55500** **LB55501** **LB55502**	30W 60W 96W 120W 200W 300W

RYNO 1.0 ADJUSTABLE

1" RECESSED LED DOWNLIGHT

DIMENSIONS

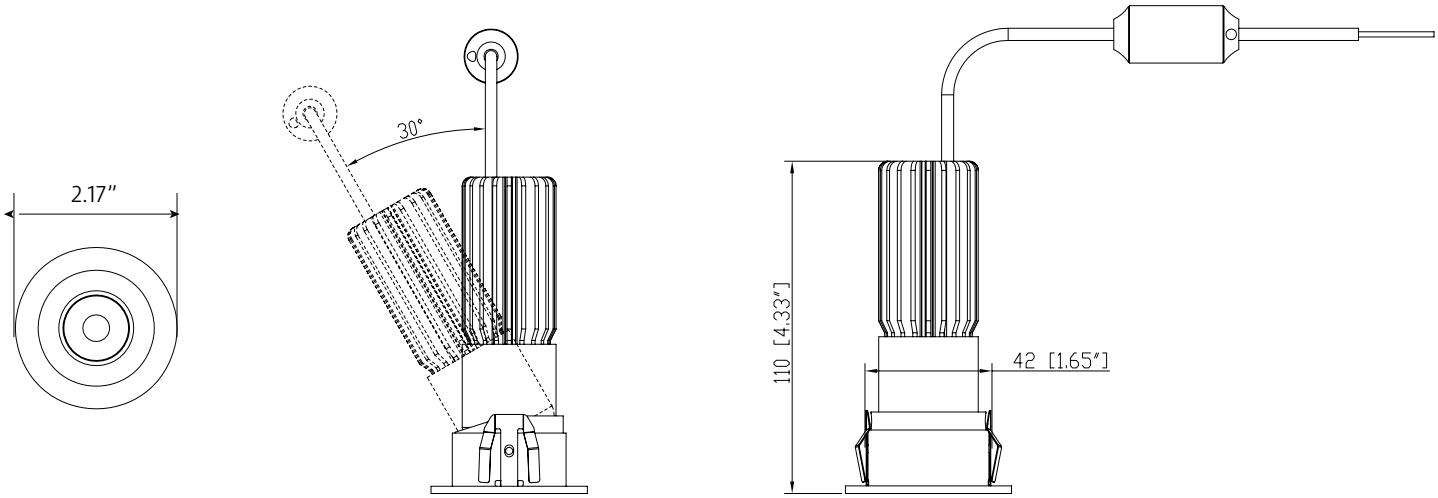

rayhil

RYNO 1.0 ADJUSTABLE

1" RECESSED LED DOWNLIGHT

DELIVERED LUMENS MATRIX

90CRI, Lens Optic, White Trim

Wattage	Color Temperature	15° Optic	24° Optic	36° Optic	50° Optic
5W	2700K (90CRI)	420.97	412.86	411	404.87
	3000K (90CRI)	434.98	423.9	418	412.96
	3500K (90CRI)	450.51	441.77	444.72	436.08
	Hex Louver (3000K)	—	—	287.9	—
	Solite (3000K)	—	—	336.93	—
7W	2700K (90CRI)	526.08	519.09	520.89	514.12
	3000K (90CRI)	544.56	532.86	530	529.95
	3500K (90CRI)	564.61	551.84	558.7	543.41
	Hex Louver (3000K)	—	—	361.28	—
	Solite (3000K)	—	—	426.18	—
10W	2700K (90CRI)	784.3	783.14	766.04	761
	3000K (90CRI)	791.69	802.95	795	787.81
	3500K (90CRI)	863.82	874.7	863.06	853.33
	Hex Louver (3000K)	—	—	536.94	—
	Solite (3000K)	—	—	640.08	—

RYNO 1.0 ADJUSTABLE

1" RECESSED LED DOWNLIGHT

COMPATIBLE DRIVER



Model	LB55500
Wattage	120W
Dimensions	7.4" x 3.7" x 1.7"
Temperature	IP67
Dimming	Triac / MLV / ELV / 0-10V



Model	LB55461
Wattage	30W
Dimensions	4.25" x 3.25" x 1.5"
Temperature	IP67
Dimming	Triac / MLV / ELV



Model	LB55501
Wattage	200W
Dimensions	9.4" x 4" x 1.7"
Temperature	IP20
Dimming	Triac / MLV / ELV / 0-10V



Model	LB55463
Wattage	60W
Dimensions	4.25" x 3.25" x 1.5"
Temperature	IP67
Dimming	Triac / MLV / ELV



Model	LB55502
Wattage	300W
Dimensions	10" x 4.3" x 1.7"
Temperature	IP20
Dimming	Triac / MLV / ELV / 0-10V



Model	LB55465
Wattage	96W
Dimensions	4.25" x 3.25" x 1.5"
Temperature	IP67
Dimming	Triac / MLV / ELV

rayhil

RYNO 1.0 ADJUSTABLE

1" RECESSED LED DOWNLIGHT

QUANTITY OF FIXTURE PER DRIVER

Wattage	Driver	Max Fixtures Per Driver
5W	LB55461 (30W)	5
	LB55463 (60W)	10
	LB55465 (96W)	16
	LB55500 (120W)	20
	LB55501 (200W)	33
	LB55502 (300W)	50
7W	LB55461 (30W)	3
	LB55463 (60W)	7
	LB55465 (96W)	11
	LB55500 (120W)	14
	LB55501 (200W)	23
	LB55502 (300W)	35
10W	LB55461 (30W)	2
	LB55463 (60W)	5
	LB55465 (96W)	8
	LB55500 (120W)	10
	LB55501 (200W)	16
	LB55502 (300W)	25