


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: RAD-5-CCT-120-36-BK/BK-LT	TYPE: CRI90 3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 187*35MM	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 113.04 lm/W			
MODEL		I _{max} (cd)	3463	S/MH (C0/180)	0.60
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.63
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1573.2	η UP, DN (C0-180)	0.0, 47.7
NOMINAL FLUX (lm)	1573.21	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 52.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

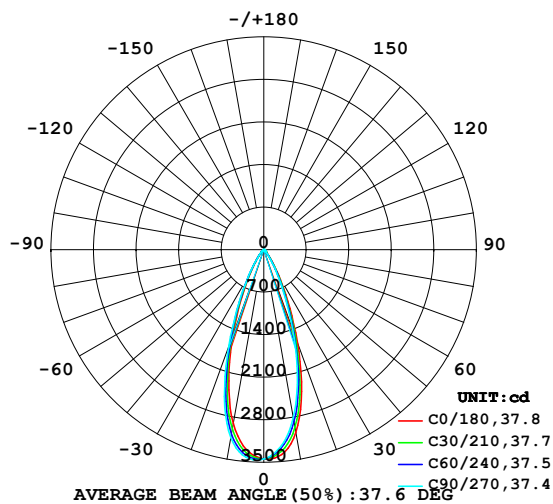

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

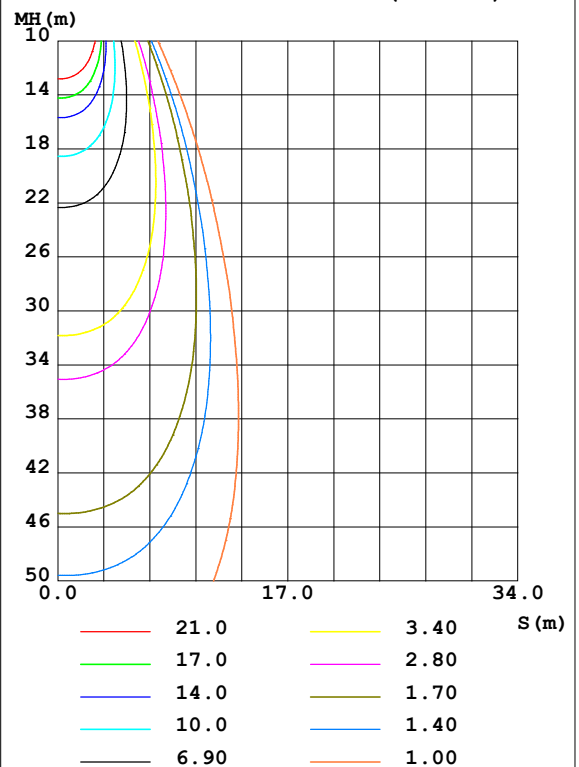

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: CHEN
Test Date: 2026-06-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 5.620m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3054	2932	2811	2849	2903	3030	3137	3151	0- 10	307.8	307.8	19.6,19.6
20	1620	1495	1391	1398	1484	1579	1684	1703	10- 20	631.2	939.0	59.7,59.7
30	496.4	459.7	402.8	410.4	448.3	483.5	509.6	520.2	20- 30	415.4	1354	86.1,86.1
40	117.7	105.6	89.28	92.71	107.7	111.3	111.1	116.5	30- 40	148.5	1503	95.5,95.5
50	36.40	34.66	30.40	32.27	35.27	35.78	35.83	36.84	40- 50	46.91	1550	98.5,98.5
60	8.325	11.24	7.240	10.60	8.791	11.60	8.143	11.94	50- 60	18.16	1568	99.7,99.7
70	1.736	1.789	1.327	1.671	1.847	1.911	1.704	1.922	60- 70	4.684	1573	100,100
80	0.0841	0.0726	0.0803	0.0725	0.2020	0.1988	0.1530	0.1465	70- 80	0.5170	1573	100,100
90	0.0726	0.0726	0.0726	0.0725	0.1720	0.1797	0.1759	0.1716	80- 90	0.1325	1573	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1531.7 lm

%lum = 97.4%

%lamp = 97.4%

Conical surface Flux(120deg): 1567.9 lm

%lum = 99.7%


%lamp = 99.7%

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHEN
 Test Date:2026-06-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:5.620m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: RAD-5-CCT-120-36-BK/BK-LT	TYPE:CRI90 3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:187*35MM	Shielding Angle:

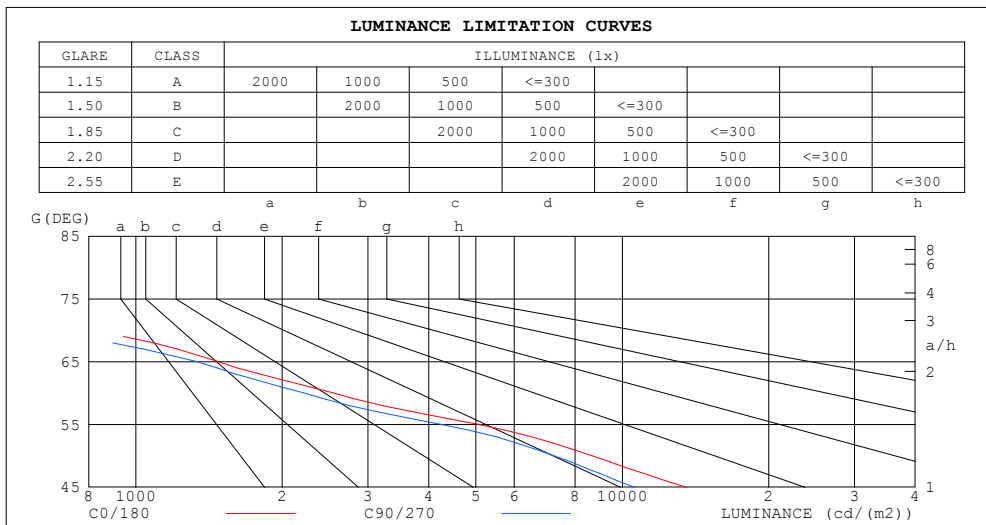

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	127	127
80	74	71
75	61	54
70	776	593
65	1474	1332
60	2544	2212
55	5046	4229
50	8655	7226
45	13539	10609


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CHEN
Test Date:2026-06-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: RAD-5-CCT-120-36-BK/BK-LT	TYPE:CRI90 3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:187*35MM	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.05	1.02	.99	1.04	1.00	.98	1.00	.98	.96	.98	.95	.94	.95	.93	.92	.90
3.0	.99	.95	.92	.98	.94	.91	.96	.92	.90	.93	.91	.88	.91	.89	.87	.85
4.0	.94	.90	.86	.93	.89	.85	.91	.87	.84	.89	.86	.83	.87	.85	.83	.81
5.0	.90	.85	.81	.89	.84	.81	.87	.83	.80	.85	.82	.79	.84	.81	.79	.77
6.0	.85	.80	.77	.85	.80	.76	.83	.79	.76	.82	.78	.75	.81	.77	.75	.74
7.0	.81	.76	.73	.81	.76	.73	.80	.75	.72	.78	.75	.72	.77	.74	.71	.70
8.0	.78	.73	.69	.77	.73	.69	.76	.72	.69	.75	.71	.69	.74	.71	.68	.67
9.0	.75	.70	.66	.74	.69	.66	.73	.69	.66	.72	.69	.66	.72	.68	.65	.64
10.0	.72	.67	.63	.71	.66	.63	.70	.66	.63	.70	.66	.63	.69	.65	.63	.62

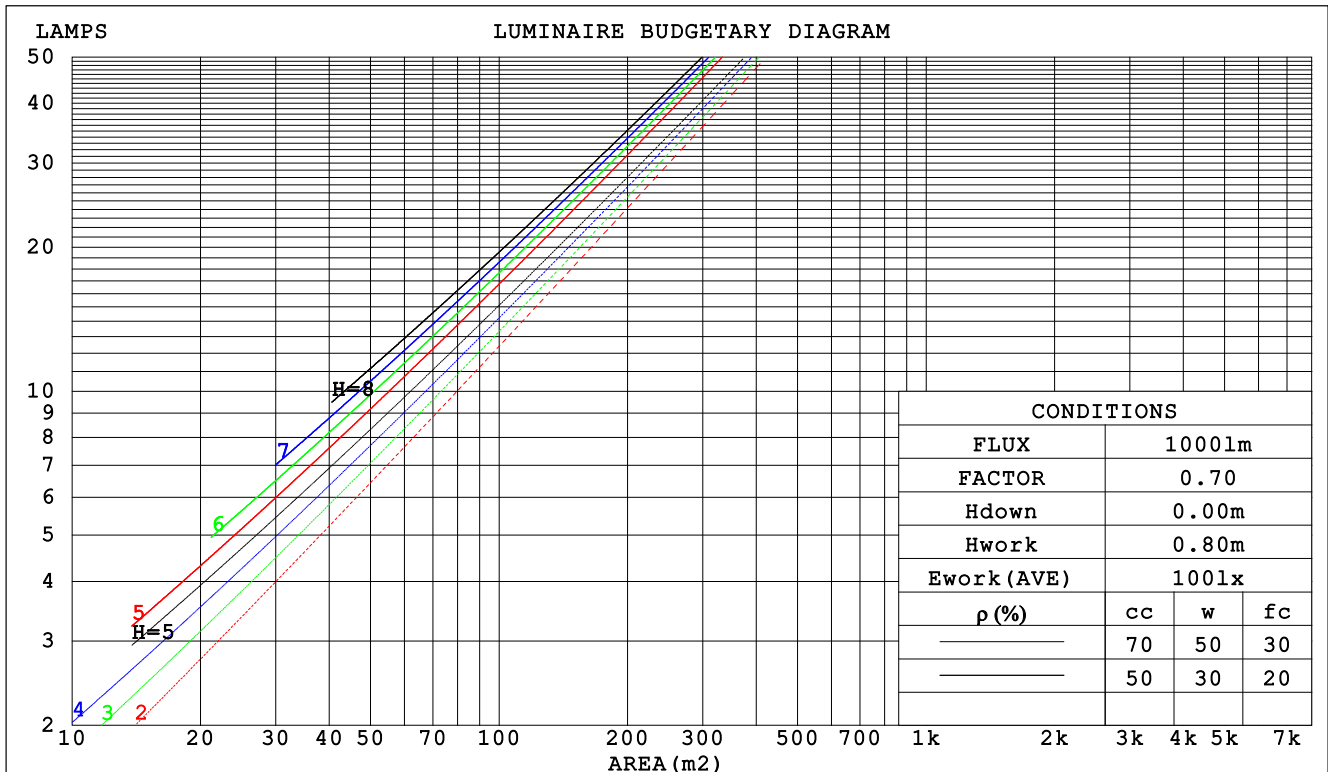

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CHEN
Test Date:2026-06-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: RAD-5-CCT-120-36-BK/BK-LT	TYPE:CRI90 3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:187*35MM	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.158	.090	.028	.151	.086	.027	.139	.080	.025	.127	.073	.024	.117	.068	.022		
2.0	.149	.082	.025	.144	.079	.024	.133	.074	.023	.124	.069	.022	.115	.065	.020		
3.0	.141	.075	.022	.136	.073	.022	.128	.069	.021	.119	.065	.020	.112	.062	.019		
4.0	.134	.069	.020	.130	.068	.020	.122	.065	.019	.115	.062	.019	.109	.059	.018		
5.0	.127	.065	.019	.123	.063	.018	.117	.061	.018	.111	.059	.017	.105	.056	.017		
6.0	.121	.061	.017	.118	.059	.017	.112	.057	.017	.107	.056	.016	.102	.054	.016		
7.0	.115	.057	.016	.113	.056	.016	.108	.054	.016	.103	.053	.015	.099	.051	.015		
8.0	.110	.054	.015	.108	.053	.015	.104	.052	.015	.099	.050	.015	.095	.049	.014		
9.0	.106	.051	.014	.104	.050	.014	.100	.049	.014	.096	.048	.014	.092	.047	.014		
10.0	.101	.049	.013	.100	.048	.013	.096	.047	.013	.093	.046	.013	.090	.045	.013		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.170	.157	.146	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016		
2.0	.153	.133	.115	.131	.114	.100	.090	.079	.069	.052	.046	.041	.017	.015	.013		
3.0	.140	.113	.093	.120	.098	.080	.082	.068	.056	.047	.040	.033	.015	.013	.011		
4.0	.128	.098	.076	.110	.085	.066	.076	.059	.046	.044	.035	.027	.014	.011	.009		
5.0	.119	.086	.063	.102	.075	.054	.070	.052	.038	.041	.031	.023	.013	.010	.008		
6.0	.111	.077	.053	.095	.067	.046	.066	.047	.032	.038	.027	.019	.012	.009	.006		
7.0	.104	.069	.045	.089	.060	.039	.062	.042	.028	.036	.025	.016	.012	.008	.005		
8.0	.098	.063	.038	.084	.054	.033	.058	.038	.024	.034	.022	.014	.011	.007	.005		
9.0	.093	.057	.033	.080	.050	.029	.055	.035	.021	.032	.021	.012	.010	.007	.004		
10.0	.088	.053	.029	.076	.046	.025	.053	.032	.018	.031	.019	.011	.010	.006	.004		

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CHEN
Test Date:2026-06-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: RAD-5-CCT-120-36-BK/BK-LT					TYPE:CRI90 3500K					WEIGHT:				
SPEC.:					DIM.:					SERIAL No.:1				
MFR.:					SUR.:187*35MM					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					13.3	14.1	13.5	14.3	14.4	12.3	13.1	12.6	13.3	13.5
3H					13.2	13.9	13.4	14.1	14.3	12.2	12.9	12.5	13.1	13.3
4H					13.1	13.8	13.4	14.0	14.2	12.1	12.8	12.4	13.0	13.3
6H					13.0	13.7	13.3	13.9	14.1	12.0	12.7	12.3	12.9	13.2
8H					13.0	13.6	13.3	13.9	14.1	12.0	12.6	12.3	12.9	13.1
12H					12.9	13.5	13.2	13.8	14.1	11.9	12.6	12.3	12.8	13.1
4H 2H					13.1	13.8	13.4	14.1	14.3	12.2	12.9	12.4	13.1	13.3
3H					13.0	13.6	13.3	13.9	14.1	12.0	12.6	12.3	12.9	13.2
4H					12.9	13.4	13.2	13.7	14.0	11.9	12.5	12.3	12.8	13.1
6H					12.8	13.3	13.2	13.6	14.0	11.8	12.3	12.2	12.7	13.0
8H					12.7	13.2	13.1	13.5	13.9	11.8	12.2	12.2	12.6	13.0
12H					12.7	13.1	13.1	13.5	13.9	11.7	12.2	12.1	12.5	12.9
8H 4H					12.7	13.2	13.1	13.5	13.9	11.8	12.2	12.2	12.6	13.0
6H					12.6	13.0	13.1	13.4	13.8	11.7	12.1	12.1	12.4	12.9
8H					12.6	12.9	13.0	13.3	13.8	11.6	12.0	12.1	12.4	12.8
12H					12.5	12.8	13.0	13.2	13.7	11.6	11.9	12.0	12.3	12.8
12H 4H					12.7	13.1	13.1	13.5	13.9	11.7	12.2	12.1	12.5	12.9
6H					12.6	12.9	13.0	13.3	13.8	11.6	12.0	12.1	12.4	12.8
8H					12.5	12.8	13.0	13.2	13.7	11.6	11.9	12.0	12.3	12.8
Variations with the observer position at spacings:														
S = 1.0H					+ 3.2 / - 7.0					+ 2.6 / - 6.7				
1.5H					+ 4.5 / - 4.1					+ 3.8 / - 3.6				
2.0H					+ 4.6 / - 6.7					+ 4.0 / - 5.9				

CIE Pub.117, 1573 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 1.6$)

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CHEN
 Test Date:2026-06-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:5.620m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

NAME: RAD-5-CCT-120-36-BK/BK-LT	TYPE:CRI90 3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:187*35MM	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	88	82	79	87	82	79	75
0.80	96	90	87	95	90	87	94	89	86	83
1.00	100	95	91	99	94	91	98	94	91	87
1.25	104	99	96	103	99	95	101	97	95	91
1.50	107	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	96
3.00	112	109	106	110	108	105	107	105	103	97
4.00	114	111	109	112	110	108	109	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: CHEN
 Test Date: 2026-06-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 5.620m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: RAD-5-CCT-120-36-BK/BK-LT	TYPE: CRI90 3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:187*35MM	Shielding Angle:

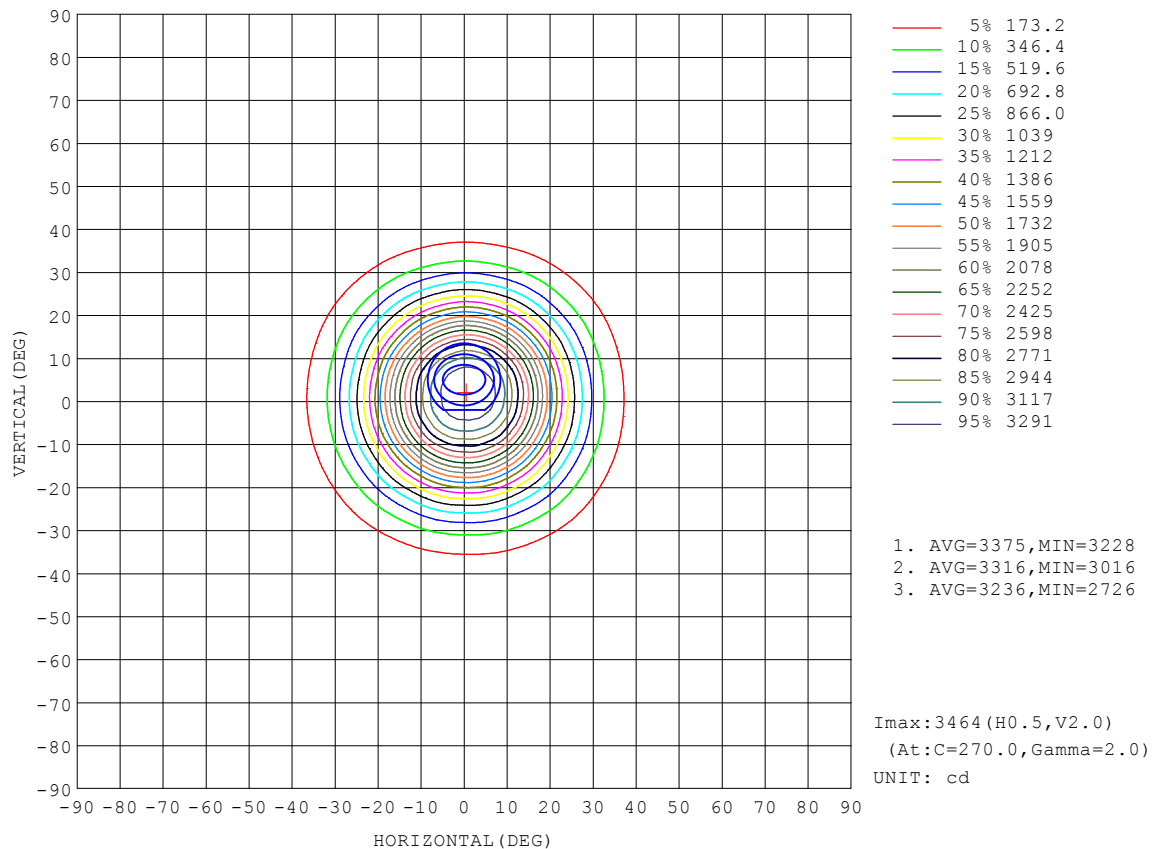


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CHEN
Test Date:2026-06-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

AAI Figure

NAME: RAD-5-CCT-120-36-BK/BK-LT	TYPE:CRI90 3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:187*35MM	Shielding Angle:

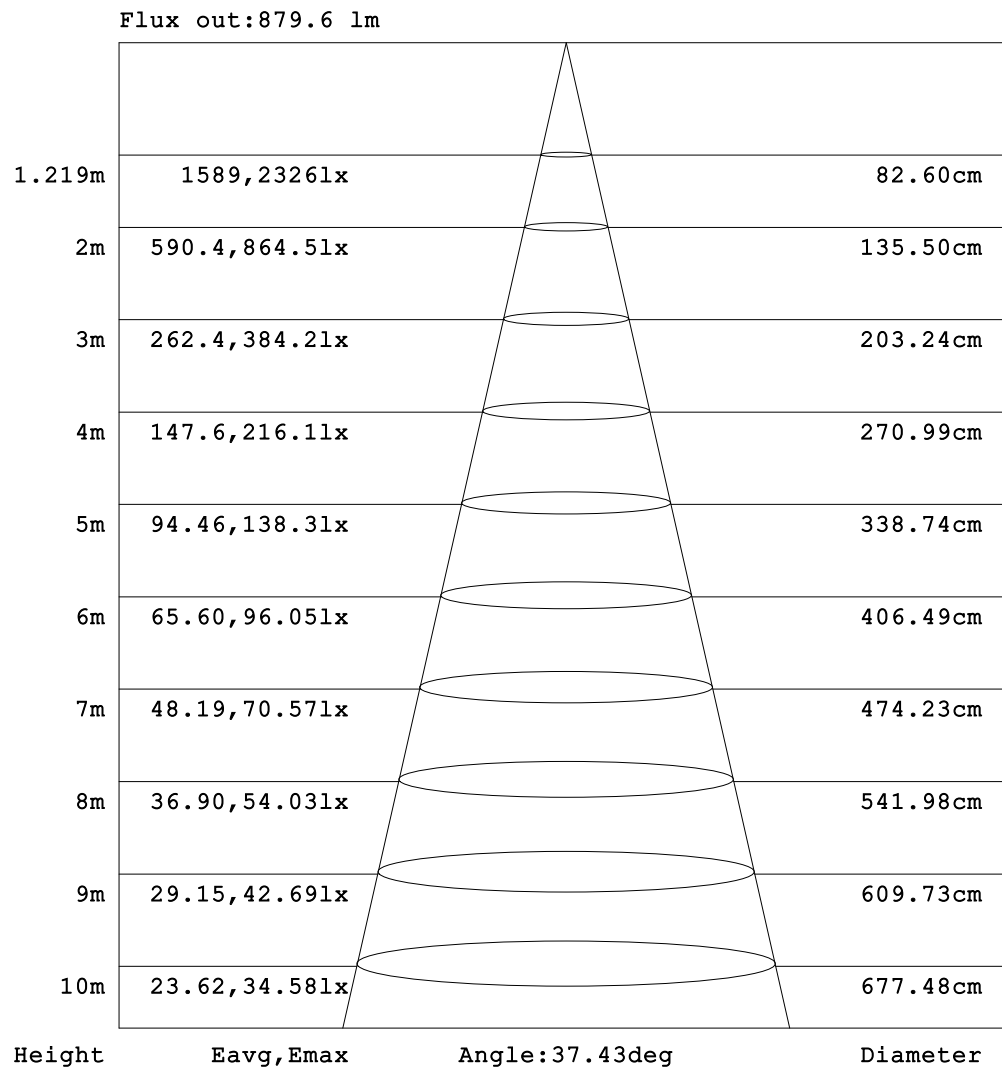


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: CHEN
 Test Date: 2026-06-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 5.620m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: RAD-5-CCT-120-36-BK/BK-LT	TYPE: CRI90 3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:187*35MM	Shielding Angle:

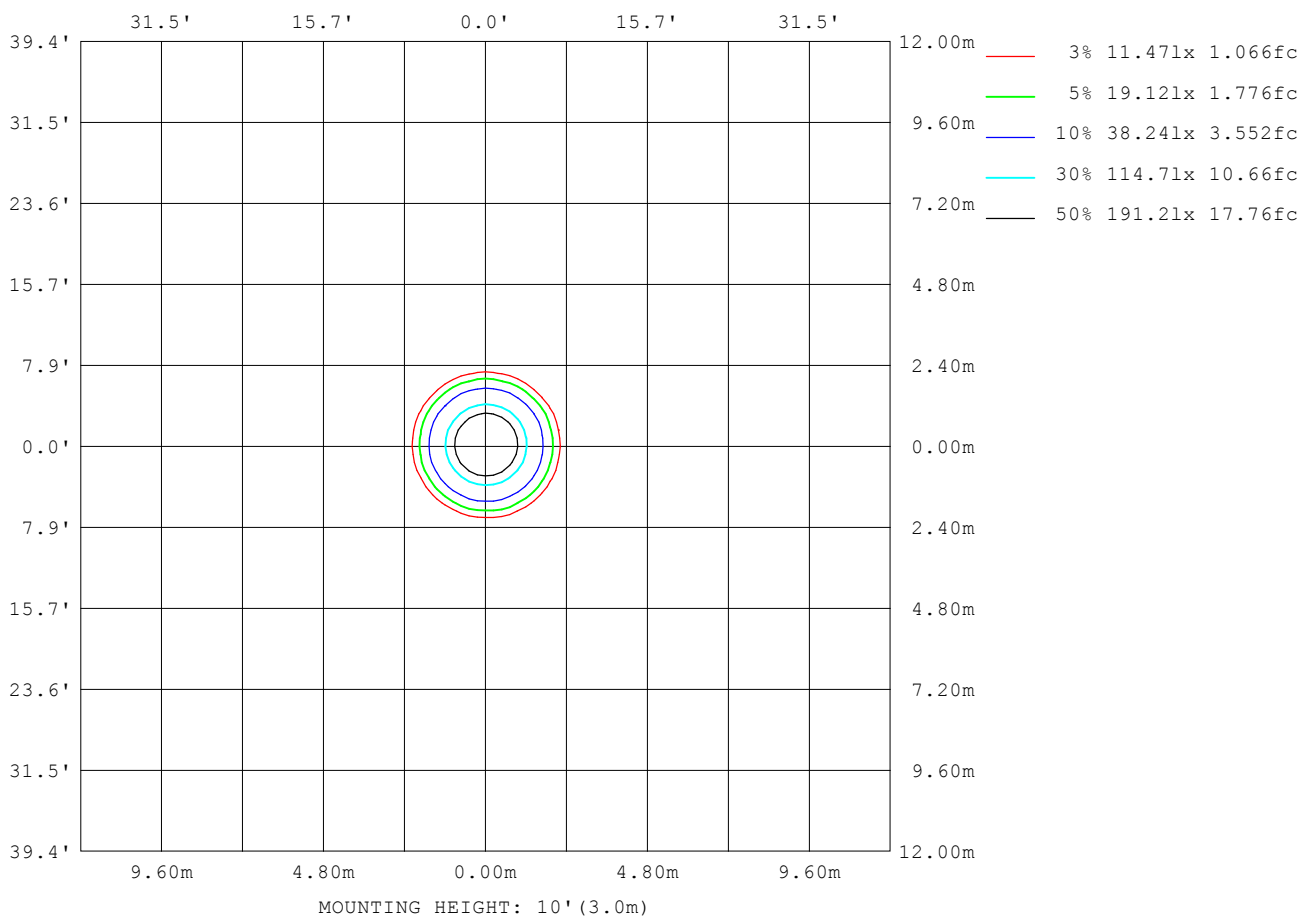

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: CHEN
Test Date: 2026-06-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 5.620m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: RAD-5-CCT-120-36-BK/BK-LT	TYPE:CRI90 3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:187*35MM	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1512
L_0~180 (75) av	122
L_0~180 (85) av	215
L_90~270 (65) av	1439
L_90~270 (75) av	185
L_90~270 (85) av	215
L_45 (65) av	1679
L_45 (75) av	175
L_45 (85) av	211

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CHEN
Test Date:2026-06-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

Planar Illuminance Curve

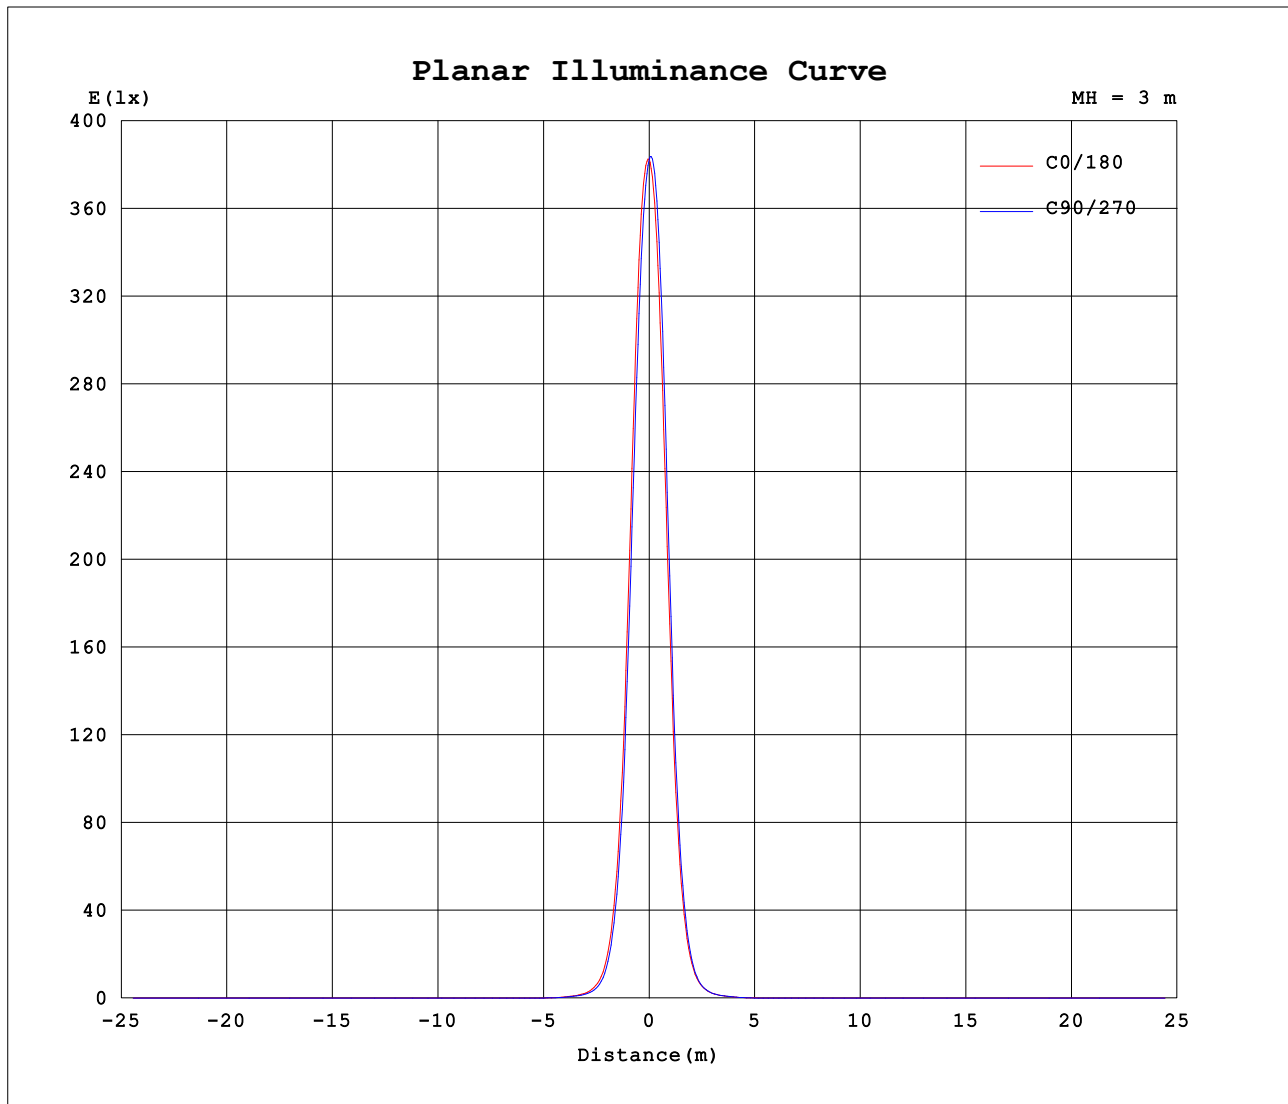

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: CHEN
Test Date: 2026-06-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 5.620m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: RAD-5-CCT-120-36-BK/BK-LT	TYPE:CRI90 3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:187*35MM	Shielding Angle:

UNIT: cd

[illegible]

```

Range: 0 - 90DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: RAD-5-CCT-120-36-BK/BK-LT	TYPE:CRI90 3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:187*35MM	Shielding Angle:

UNIT: cd

[illegible]

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

```