


## LUMINAIRE PHOTOMETRIC TEST REPORT


NAME:	TYPE:CRI90 3000K	WEIGHT:
SPEC.:RAD35S-15-CCT	DIM.:	SERIAL No.:1
MFR.:	SUR.:56*56MM	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 82.09 lm/W
MODEL		I <sub>max</sub> (cd)	1131	S/MH (C0/180)		0.93
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH (C90/270)		0.90
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1140.3	η UP,DN (C0-180)		0.0,51.3
NOMINAL FLUX(lm)	1140.33	CIE CLASS	DIRECT	η UP,DN (C180-360)		0.0,48.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.75
TEST VOLTAGE(V)	120	η down (%)	100.0	CIBSE SHR MAX		0.80

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

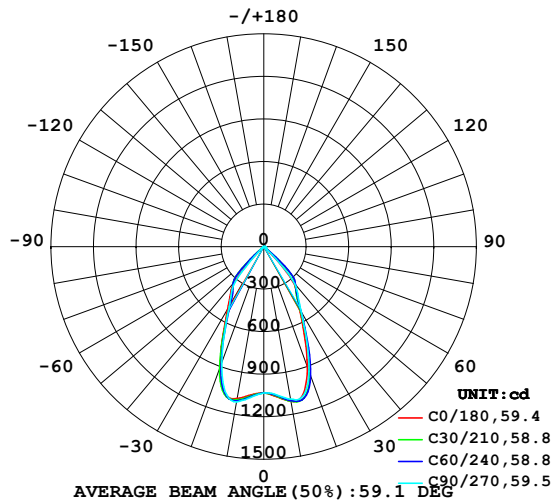

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

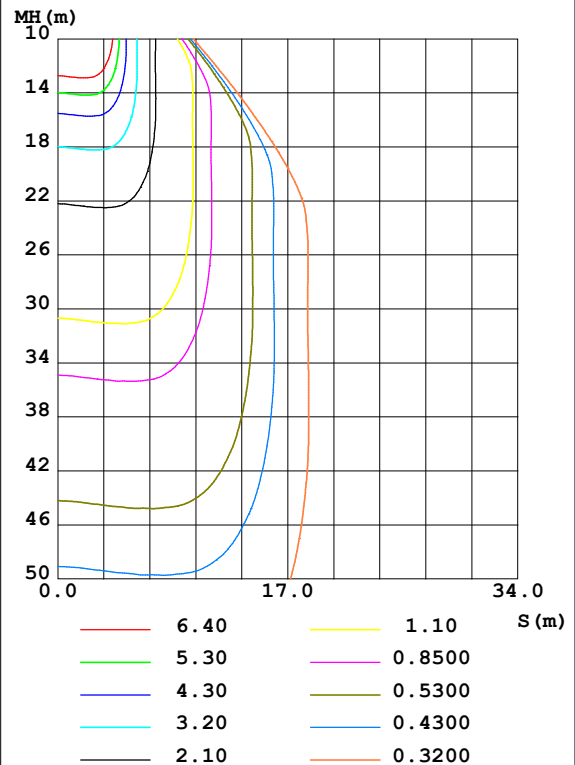

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: 陈荷莲  
Test Date: 2024-06-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 5.620m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	1107	1107	1091	1091	1087	1103	1111	1125	0- 10	102.5	102.5	8.99,8.99
20	898.9	983.5	934.2	957.3	900.5	905.9	866.8	927.2	10- 20	297.2	399.7	35.1,35.1
30	503.4	521.8	530.2	507.2	512.2	471.2	489.8	484.1	20- 30	315.8	715.5	62.7,62.7
40	319.2	344.9	338.7	343.1	309.4	333.7	282.1	338.0	30- 40	253.3	968.7	85,85
50	25.55	156.4	27.07	137.0	23.29	98.64	22.03	106.4	40- 50	142.3	1111	97.4,97.4
60	12.42	9.251	12.90	8.744	12.76	8.118	11.92	8.152	50- 60	17.15	1128	98.9,98.9
70	5.749	4.429	6.408	4.508	5.791	4.246	5.489	4.198	60- 70	7.449	1136	99.6,99.6
80	2.532	2.194	2.709	2.222	2.636	1.957	2.481	1.998	70- 80	3.725	1139	99.9,99.9
90	0.0632	0.0826	0.1158	0.0689	0.1209	0.1459	0.1295	0.1406	80- 90	0.9684	1140	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1067.4 lm

%lum = 93.6%

%lamp = 93.6%

Conical surface Flux(120deg): 1128.2 lm

%lum = 98.9%


%lamp = 98.9%

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:陈荷莲  
Test Date:2024-06-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:5.620m [K=1.0000]  
Remarks:

LUMINANCE LIMITATION CURVES

NAME:	TYPE:CRI90 3000K	WEIGHT:
SPEC.:RAD35S-15-CCT	DIM.:	SERIAL No.:1
MFR.:	SUR.:56*56MM	Shielding Angle:

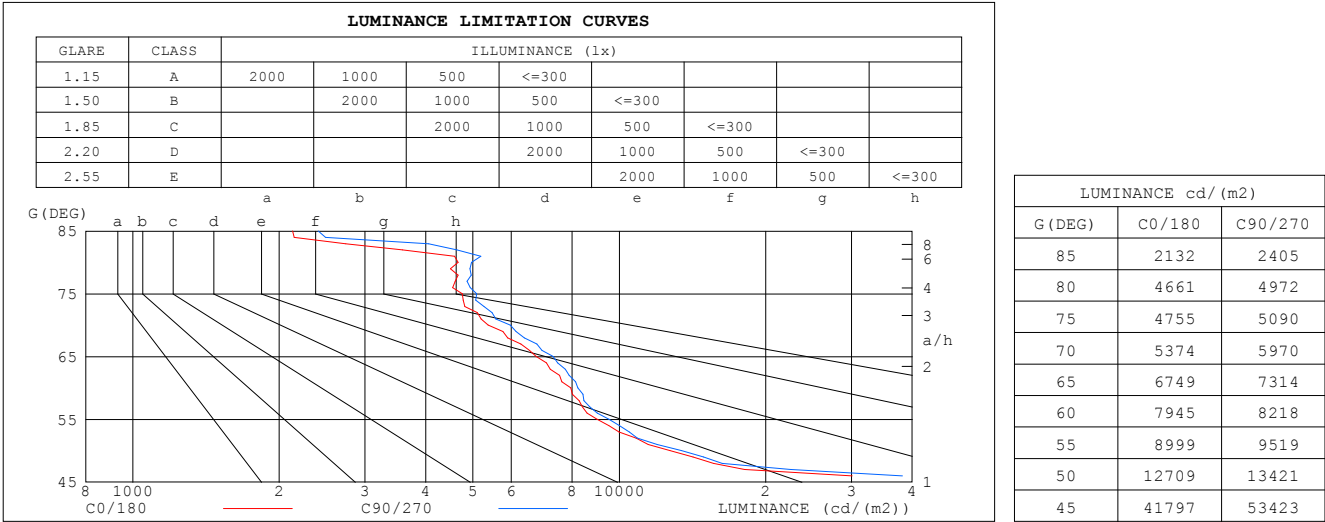


C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:陈荷莲  
Test Date:2024-06-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:5.620m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME:	TYPE:CRI90 3000K	WEIGHT:
SPEC.:RAD35S-15-CCT	DIM.:	SERIAL No.:1
MFR.:	SUR.:56*56MM	Shielding Angle:

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.10	1.08	1.05	1.08	1.06	1.04	1.04	1.02	1.00	1.00	.99	.97	.97	.96	.95	.93
2.0	1.02	.98	.94	1.00	.96	.93	.97	.94	.91	.94	.91	.89	.91	.89	.87	.85
3.0	.94	.89	.85	.93	.88	.84	.90	.86	.83	.88	.84	.82	.86	.83	.80	.79
4.0	.88	.82	.77	.86	.81	.77	.84	.80	.76	.82	.78	.75	.80	.77	.74	.73
5.0	.82	.75	.71	.81	.75	.70	.79	.74	.70	.77	.73	.69	.75	.72	.69	.67
6.0	.76	.70	.65	.75	.69	.65	.74	.68	.65	.72	.68	.64	.71	.67	.64	.62
7.0	.71	.65	.60	.70	.64	.60	.69	.64	.60	.68	.63	.59	.67	.62	.59	.58
8.0	.67	.60	.56	.66	.60	.56	.65	.60	.56	.64	.59	.55	.63	.58	.55	.54
9.0	.63	.56	.52	.62	.56	.52	.61	.56	.52	.60	.55	.52	.59	.55	.52	.50
10.0	.59	.53	.49	.59	.53	.49	.58	.52	.49	.57	.52	.48	.56	.52	.48	.47

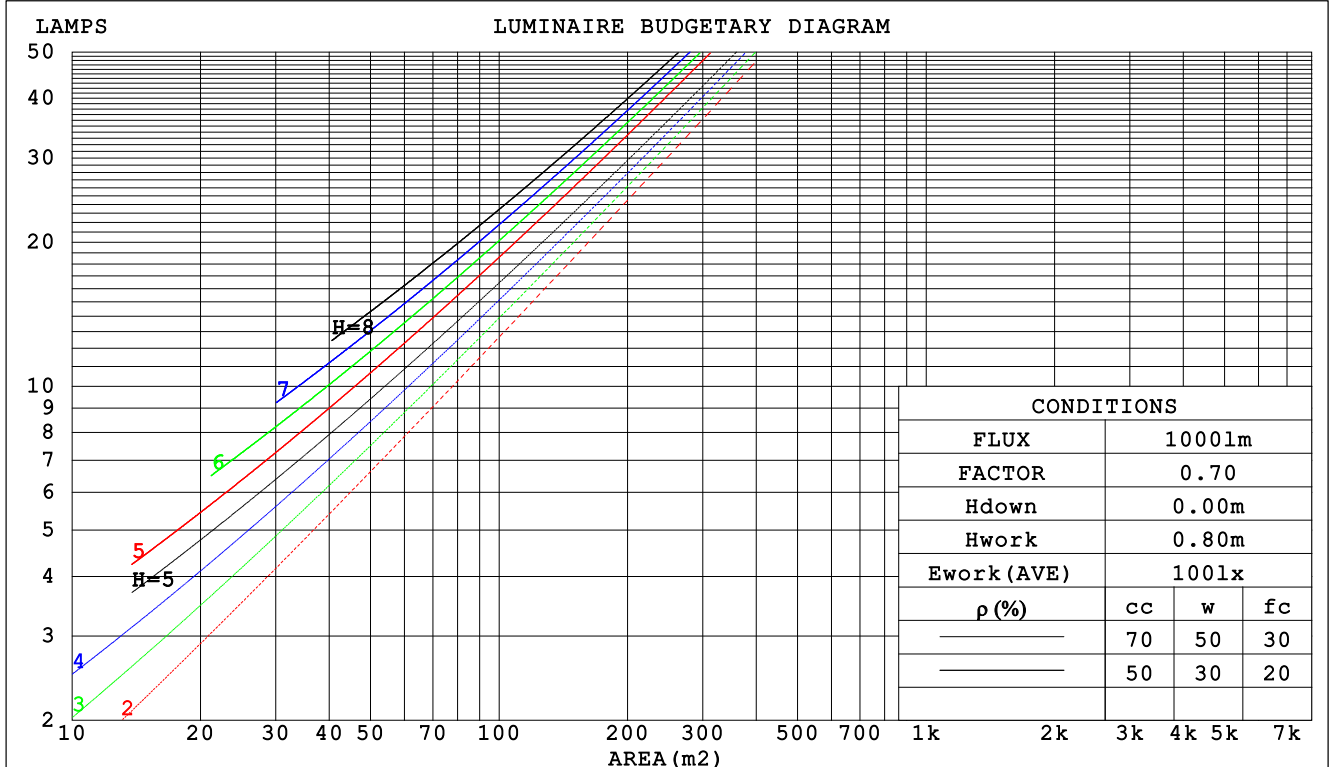

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:陈荷莲  
Test Date:2024-06-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:5.620m [K=1.0000]  
Remarks:

## WEC AND CCEC

NAME:	TYPE:CRI90 3000K	WEIGHT:
SPEC.:RAD35S-15-CCT	DIM.:	SERIAL No.:1
MFR.:	SUR.:56*56MM	Shielding Angle:

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.189 .107 .034	.182 .104 .033	.169 .097 .031	.158 .091 .029	.147 .085 .027	
2.0	.182 .100 .031	.176 .097 .030	.165 .092 .029	.155 .087 .027	.146 .083 .026	
3.0	.174 .092 .028	.169 .090 .027	.160 .086 .026	.151 .083 .025	.143 .079 .025	
4.0	.165 .086 .025	.161 .084 .025	.153 .081 .024	.146 .078 .024	.139 .076 .023	
5.0	.158 .080 .023	.154 .079 .023	.147 .077 .023	.141 .074 .022	.135 .072 .022	
6.0	.150 .075 .022	.147 .074 .021	.141 .072 .021	.135 .070 .021	.130 .068 .020	
7.0	.144 .071 .020	.141 .070 .020	.135 .068 .020	.130 .067 .019	.125 .065 .019	
8.0	.137 .067 .019	.135 .066 .019	.130 .065 .019	.125 .063 .018	.121 .062 .018	
9.0	.131 .064 .018	.129 .063 .018	.125 .062 .017	.120 .060 .017	.117 .059 .017	
10.0	.126 .060 .017	.124 .060 .017	.120 .059 .017	.116 .058 .016	.112 .057 .016	

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.172 .157 .144	.147 .135 .124	.101 .093 .086	.058 .054 .050	.019 .017 .016	
2.0	.158 .132 .111	.135 .114 .096	.092 .079 .067	.053 .046 .039	.017 .015 .013	
3.0	.146 .114 .088	.125 .098 .076	.086 .068 .053	.050 .040 .032	.016 .013 .010	
4.0	.136 .099 .071	.117 .086 .061	.080 .060 .043	.046 .035 .026	.015 .011 .008	
5.0	.128 .088 .058	.110 .076 .050	.076 .053 .036	.044 .031 .021	.014 .010 .007	
6.0	.121 .079 .048	.104 .068 .042	.072 .048 .030	.042 .028 .018	.013 .009 .006	
7.0	.115 .071 .041	.099 .062 .035	.068 .043 .025	.040 .025 .015	.013 .008 .005	
8.0	.109 .065 .035	.094 .056 .030	.065 .040 .022	.038 .023 .013	.012 .008 .004	
9.0	.104 .060 .030	.090 .052 .026	.062 .037 .019	.036 .022 .011	.012 .007 .004	
10.0	.099 .056 .027	.086 .048 .023	.059 .034 .016	.035 .020 .010	.011 .007 .003	

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:陈荷莲  
Test Date:2024-06-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:5.620m [K=1.0000]  
Remarks:

UGR(Unified Glare Rating) Table

NAME:					TYPE:CRI90 3000K			WEIGHT:			
SPEC.:RAD35S-15-CCT					DIM.:			SERIAL No.:1			
MFR.:					SUR.:56*56MM			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	23.3	24.3	23.5	24.5	24.6	23.5	24.6	23.8	24.7	24.9
	3H	23.1	24.1	23.4	24.3	24.5	23.4	24.3	23.6	24.5	24.7
	4H	23.0	23.9	23.3	24.1	24.4	23.3	24.2	23.6	24.4	24.6
	6H	23.0	23.8	23.3	24.0	24.3	23.2	24.1	23.5	24.3	24.6
	8H	22.9	23.7	23.2	24.0	24.2	23.2	24.0	23.5	24.3	24.5
	12H	22.9	23.6	23.2	23.9	24.2	23.2	23.9	23.5	24.2	24.5
4H	2H	23.0	23.9	23.3	24.1	24.3	23.3	24.2	23.6	24.4	24.6
	3H	22.9	23.6	23.2	23.9	24.2	23.1	23.9	23.5	24.2	24.4
	4H	22.8	23.5	23.1	23.8	24.1	23.1	23.8	23.4	24.1	24.4
	6H	22.7	23.3	23.1	23.7	24.0	23.0	23.6	23.4	23.9	24.3
	8H	22.7	23.2	23.1	23.6	24.0	23.0	23.5	23.4	23.9	24.2
	12H	22.6	23.2	23.1	23.5	23.9	22.9	23.4	23.3	23.8	24.2
8H	4H	22.7	23.2	23.1	23.6	23.9	22.9	23.5	23.3	23.8	24.2
	6H	22.6	23.1	23.0	23.5	23.9	22.9	23.3	23.3	23.7	24.1
	8H	22.6	23.0	23.0	23.4	23.8	22.8	23.2	23.3	23.7	24.1
	12H	22.5	22.9	23.0	23.3	23.8	22.8	23.1	23.3	23.6	24.1
12H	4H	22.6	23.1	23.0	23.5	23.9	22.9	23.4	23.3	23.8	24.2
	6H	22.6	23.0	23.0	23.4	23.8	22.8	23.2	23.3	23.6	24.1
	8H	22.5	22.9	23.0	23.3	23.8	22.8	23.1	23.3	23.6	24.1
Variations with the observer position at spacings:											
S = 1.0H		+ 2.8 / -10.6					+ 2.7 / -10.3				
1.5H		+ 3.5 / -10.2					+ 3.4 / -10.0				
2.0H		+ 5.1 / - 4.9					+ 5.5 / - 5.5				

CIE Pub.117, 1140 lm Total Lamp Luminous Flux Correct ( $8\log(F/F_0) = 0.5$ )

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:陈荷莲  
 Test Date:2024-06-29

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:5.620m [K=1.0000]  
 Remarks:

## UTILIZATION FACTORS TABLE

NAME:	TYPE:CRI90 3000K	WEIGHT:
SPEC.:RAD35S-15-CCT	DIM.:	SERIAL No.:1
MFR.:	SUR.:56*56MM	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT)    k(RI) x RCR = 5									
k = 0.60	82	75	70	82	75	70	81	74	70	66
0.80	90	84	79	90	83	79	88	83	79	75
1.00	96	90	85	95	89	85	93	89	85	80
1.25	101	95	91	100	94	90	98	93	90	85
1.50	104	98	95	102	98	94	100	96	93	88
2.00	107	102	99	106	101	98	103	99	97	91
2.50	109	105	101	107	103	101	104	101	99	92
3.00	111	107	104	109	106	103	105	103	101	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	109	112	110	108	108	106	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNOM = 1.25										

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: 陈荷莲  
Test Date: 2024-06-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 5.620m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

NAME:	TYPE:CRI90 3000K	WEIGHT:
SPEC.:RAD35S-15-CCT	DIM.:	SERIAL No.:1
MFR.:	SUR.:56*56MM	Shielding Angle:

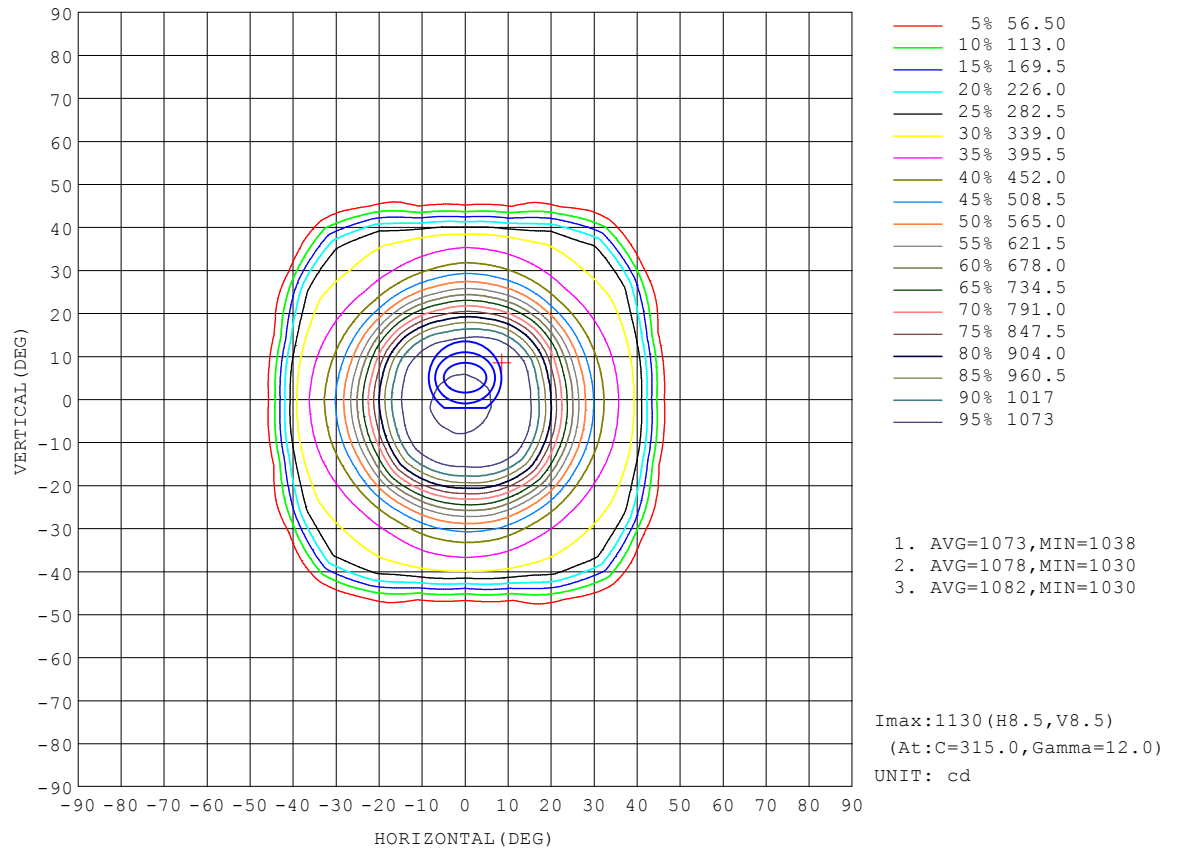


C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:陈荷莲  
Test Date:2024-06-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:5.620m [K=1.0000]  
Remarks:



## AAI Figure

NAME:	TYPE:CRI90 3000K	WEIGHT:
SPEC.:RAD35S-15-CCT	DIM.:	SERIAL No.:1
MFR.:	SUR.:56*56MM	Shielding Angle:

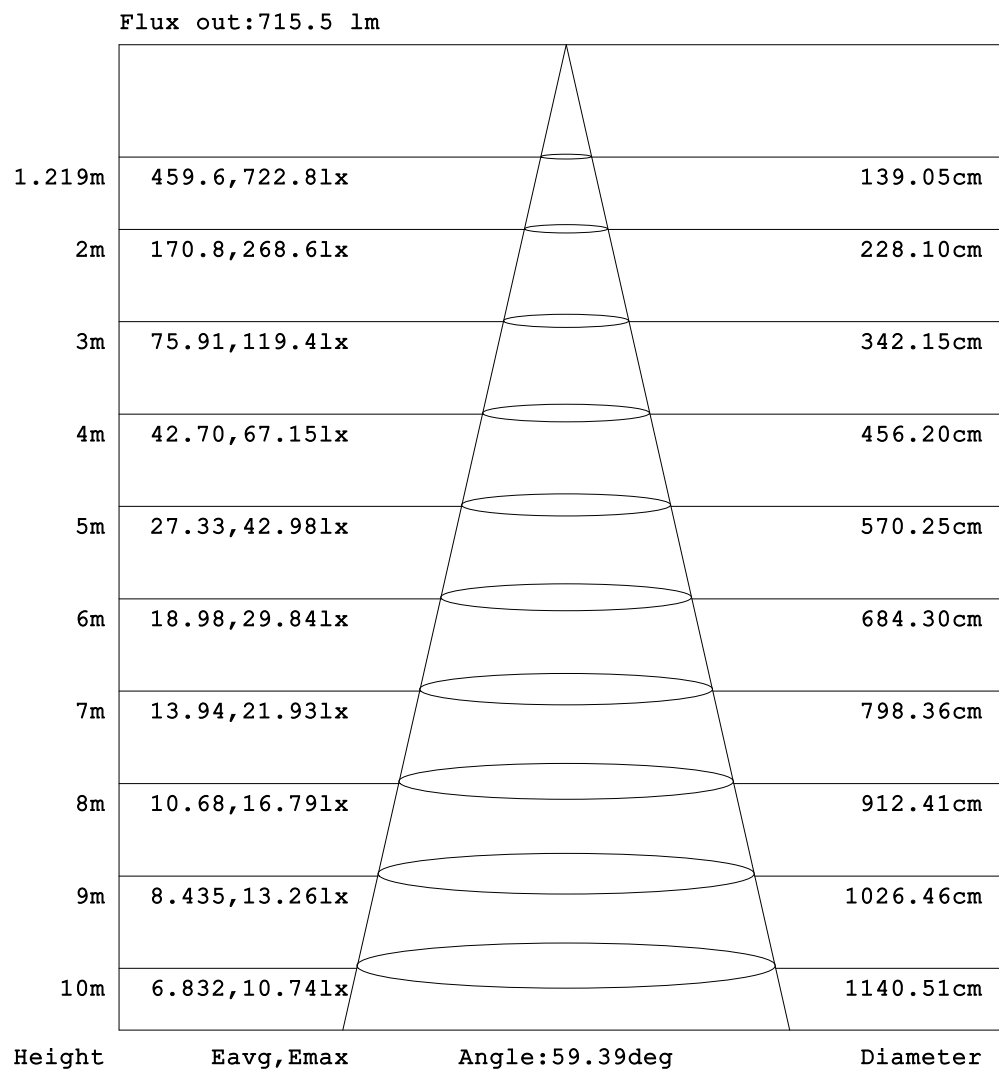


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:陈荷莲  
Test Date:2024-06-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:5.620m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM

NAME:	TYPE:CRI90 3000K	WEIGHT:
SPEC.:RAD35S-15-CCT	DIM.:	SERIAL No.:1
MFR.:	SUR.:56*56MM	Shielding Angle:

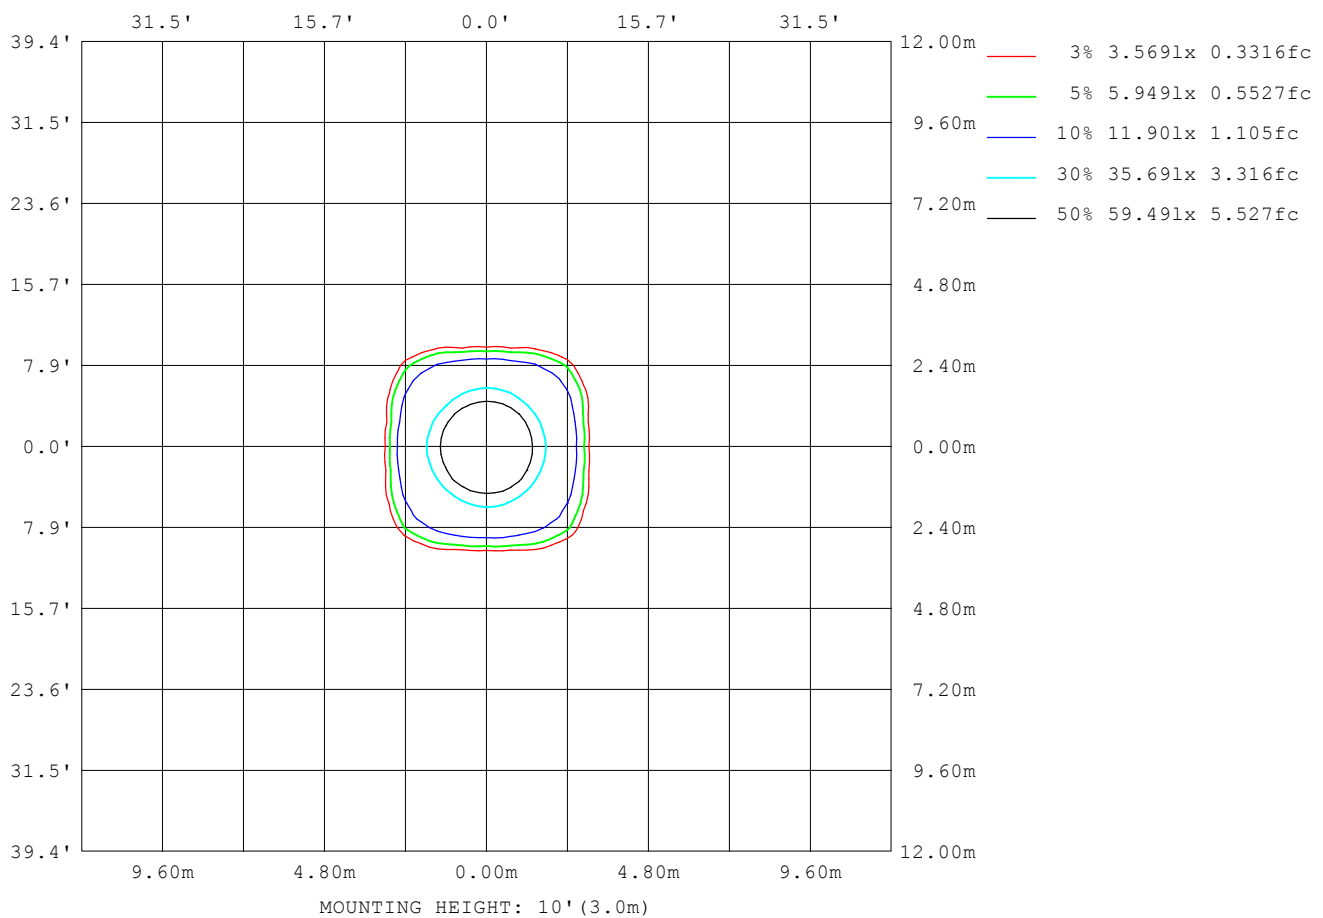

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:陈荷莲  
Test Date:2024-06-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:5.620m [K=1.0000]  
Remarks:

## LED Avg.L Report

NAME:	TYPE:CRI90 3000K	WEIGHT:
SPEC.:RAD35S-15-CCT	DIM.:	SERIAL No.:1
MFR.:	SUR.:56*56MM	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6754
L_0~180 (75) av	4777
L_0~180 (85) av	2246
L_90~270 (65) av	6878
L_90~270 (75) av	4796
L_90~270 (85) av	2234
L_45 (65) av	4436
L_45 (75) av	4042
L_45 (85) av	2270

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:陈荷莲  
Test Date:2024-06-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:5.620m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

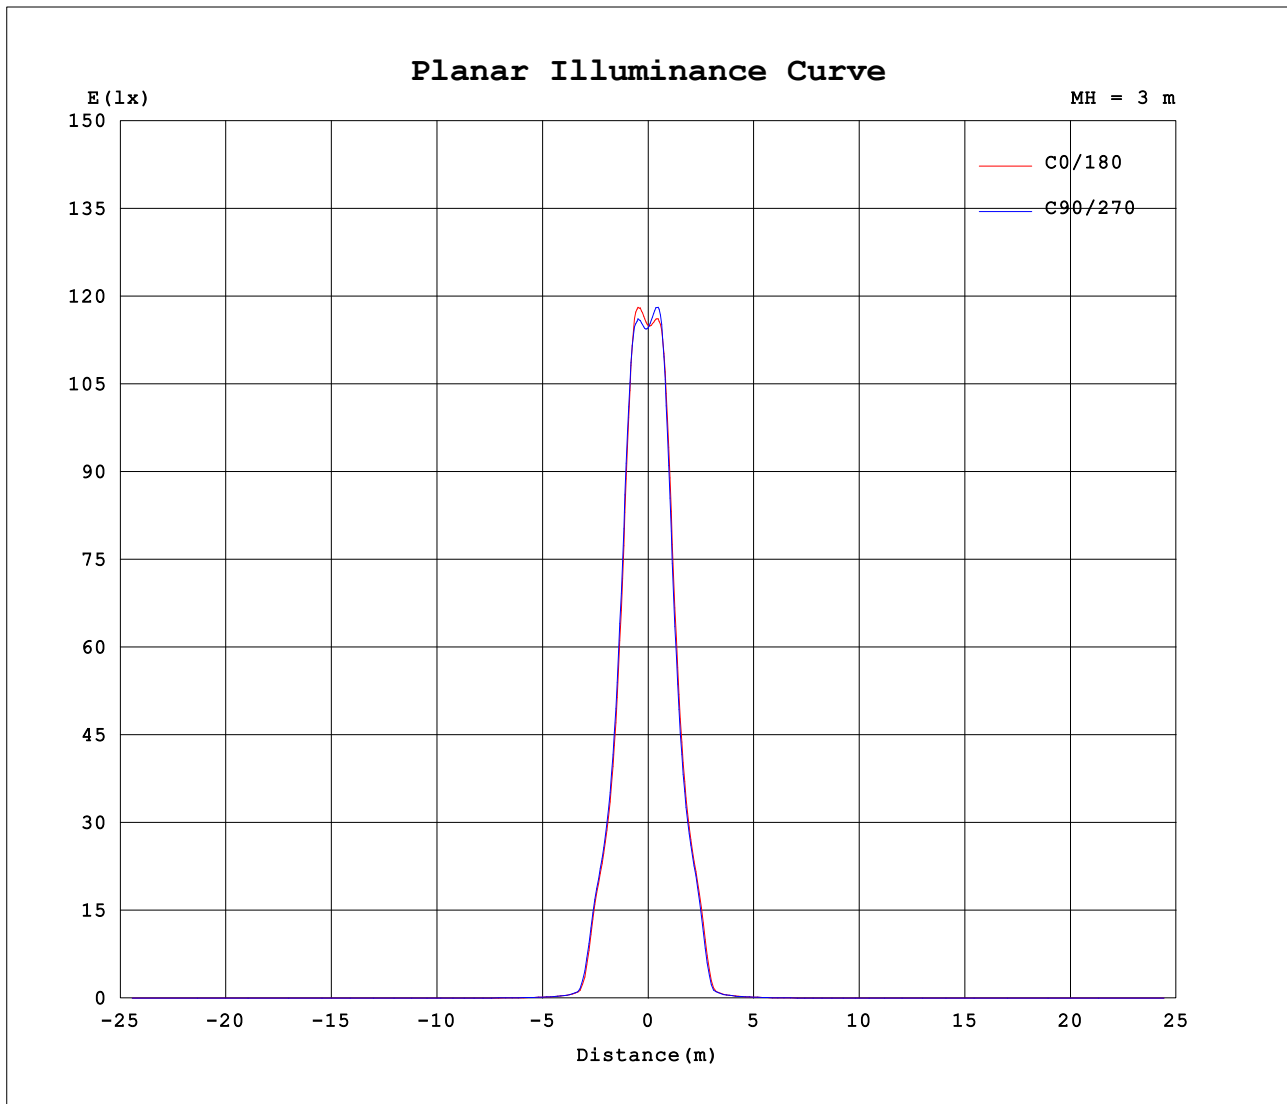

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: 陈荷莲  
Test Date: 2024-06-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 5.620m [K=1.0000]  
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks:

```