




RAD35X

SONIC 3.5 X TRIMLESS

3.5" RECESSED LED DOWNLIGHT

FEATURES

- Air-tight and wet location approved
- Type IC rated - approved for direct contact with insulation
- Downlight housing is not required even for insulated ceiling
- Seamless mud-in trim
- Quick connect wire allows for efficient installation
- New construction plate available (NCH350)
- Optional Emergency Backup
- 5 Year Warranty



SPECIFICATIONS



Wattage	20W
Lumens	2000LM
Input Voltage	120-277V
CCT	27K, 30K, 35K, 40K, 50K (CCT Adj.)
Efficacy	>100LM/W
CRI	>90
Beam Angle	15°/24°/36°/50°
Dimming	Triac & 0-10V
Environment	IP65 Wet Location
Material	Aluminum Body with Anodized Heat Sink
Operating Temperature	-4°F - 104°F
Lamp Life	50,000 hrs
Cut Out	3.5"

ORDERING GUIDE

RAD35TMS - R - 15 - CCT - UNV - ____ - ____ - WT - ____ - ____

Example: RAD35TMSJ-R-15-CCT-UNV-15-C-WT-EM-CP

Model	Wattage	Color Temperature	Input Voltage	Beam Angle	Lens	Trim Finish	EM	Protection
RAD35TMSJ-R (Trimless Round)	20 20W	CCT CCT Adj. (27K, 30K, 35K 40K, 50K)	UNV 120-277V	15 15° 24 24° 36 36° 50 50°	C Clear F Frosted HX Hex Louver SL Solite	WT White	EM	None (Leave Blank) CP Chicago Plenum








RAD35X SONIC 3.5 X TRIMLESS

3.5" RECESSED LED DOWNLIGHT

DIMENSIONS

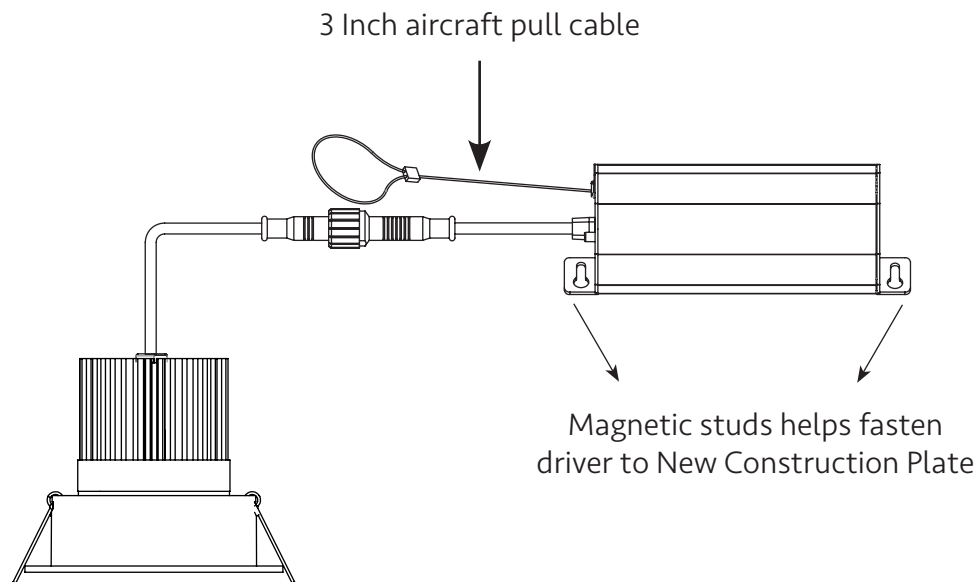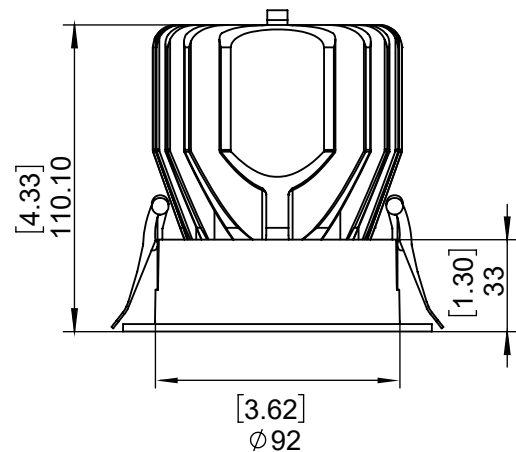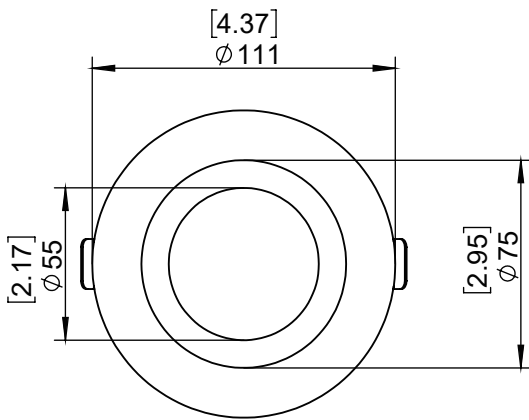




RAD35X SONIC 3.5 X TRIMLESS

3.5" RECESSED LED DOWNLIGHT

ACCESSORIES

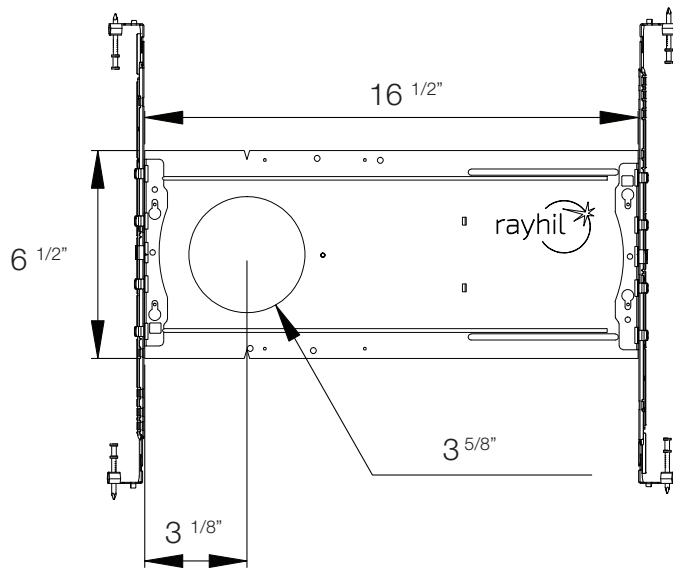

NEW CONSTRUCTION MOUNTING PLATE NCH350

- Constructed out of galvanized steel
- Magnetic plate and driver facilitate easy and secure placement
- Adjustable Hanger Bars up to 24"


FROSTED LENS OPTION





RAD35X SONIC 3.5 X TRIMLESS

3.5" RECESSED LED DOWNLIGHT

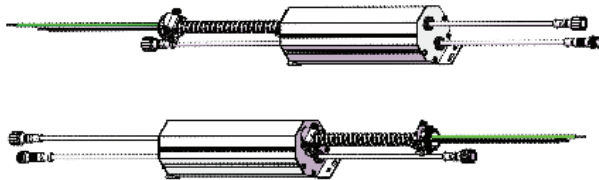


EMERGENCY BACK UP DRIVER

RAD25/35-EM

90 minute run time

See spec sheet for further information

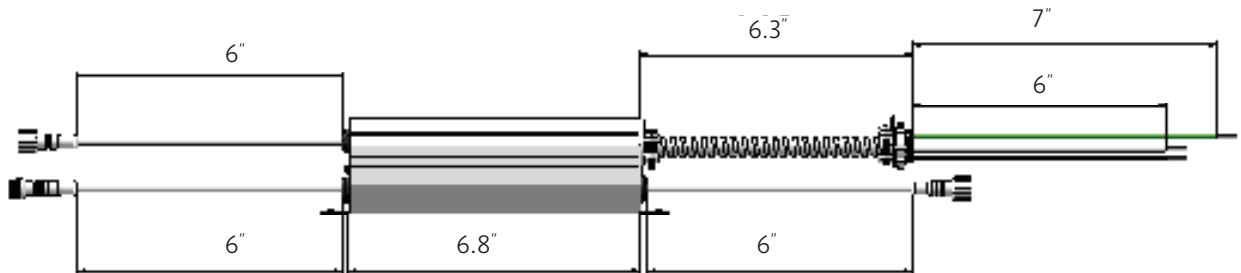



RAD35X

SONIC 3.5 X TRIMLESS

3.5" RECESSED LED DOWNLIGHT

COMPATIBLE DIMMERS

LUTRON	LOAD (W)
SKYLARK CONTOUR LECL-153P	150W
SKYLARK CONTOUR CTCL-150H	150W
SKYLARK CONTOUR LGCL-153PLH	150W
SKYLARK CONTOUR CTCL-153P	150W
SKYLARK CONTOUR SCL-153P	150W
SKYLARK CONTOUR S-600P	600W
CASETA PD-6WCL	600W
CASETA PD-5NE	150W
CASETA PD-10NXD	250W
DIVA DVCL-153P	150W
TOGGLER TGCL-153P	150W
ARIADNI AYCL-153P	150W
MAESTRO MACL-153M	150W

LEVITON	LOAD (W)
ILLUMATEC IPL06	150W
SURESLIDE 6672	150W
SURESLIDE 6674	150W
EATON	
SMART DIMMER AAL06	300W
PASS & SEYMOUR	
HARMONY DCL453PTCCCV6	150W
GE	
ROCKER 10464	150W
TOGGLE 18027	150W